



Service Bulletin

PRELIMINARY INFORMATION

Subject: Buzz / Rattle Noise From Dash Or Front Of Vehicle

Models: 2015 - 2016 Cadillac Escalade Models
2015 - 2016 Chevrolet Suburban, Tahoe
2015 - 2016 GMC Yukon Models

This PI was superseded to update Model Years. Please discard PIT5447.


The following diagnosis might be helpful if the vehicle exhibits the symptom(s) described in this PI.

Condition/Concern

Some customers may comment that they hear a rattle or buzz noise from the dash or front of the vehicle. It may be most noticeable with engine RPM or when turning left or right.

Recommendation/Instructions

Inspect for the rear heater pipes contacting the passenger side exhaust manifold. If the rear heater pipe is found to be contacting the exhaust manifold (as shown below), reposition the heater pipe so it no longer makes contact.

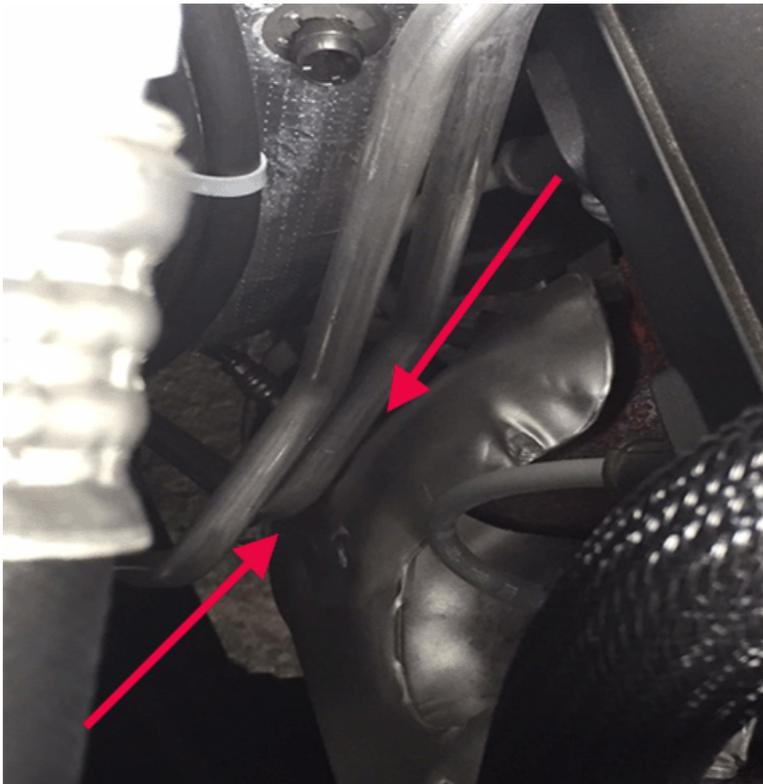

Warranty Information

For vehicles repaired under warranty use:

Labor Operation	Description	Labor Time
4480348 *	Reposition The Rear Heater Pipe	0.4 hr
* This is a unique labor operation for bulletin use only.		

Please follow this diagnostic or repair process thoroughly and complete each step. If the condition exhibited is resolved without completing every step, the remaining steps do not need to be performed.

GM bulletins are intended for use by professional technicians, NOT a "do-it-yourselfer". They are written to inform these technicians of conditions that may occur on some vehicles, or to provide information that could assist in the proper service of a vehicle. Properly trained technicians have the equipment, tools, safety instructions, and know-how to do a job properly and safely. If a condition is described, DO NOT assume that the bulletin applies to your vehicle, or that your vehicle will have that condition. See your GM dealer for information on whether your vehicle may benefit from the information.



WE SUPPORT VOLUNTARY TECHNICIAN CERTIFICATION