



Service Bulletin


INFORMATION

Subject: Information on Underhood Fascia Fasteners Appear to be Loose

Brand:	Model:	Model Year:		VIN:		Engine:	Transmission:
		from	to	from	to		
Chevrolet	Malibu (VIN Z)	2016	2016			All	All

Involved Region or Country	Israel
Condition	A customer or technician may comment that three front fascia fastener locations, positioned under the hood, show a gap and appear to be loose.
Cause	The preset gap is design intent, and each fastener has Loctite applied to the threads so the preset gap does not change.

Correction

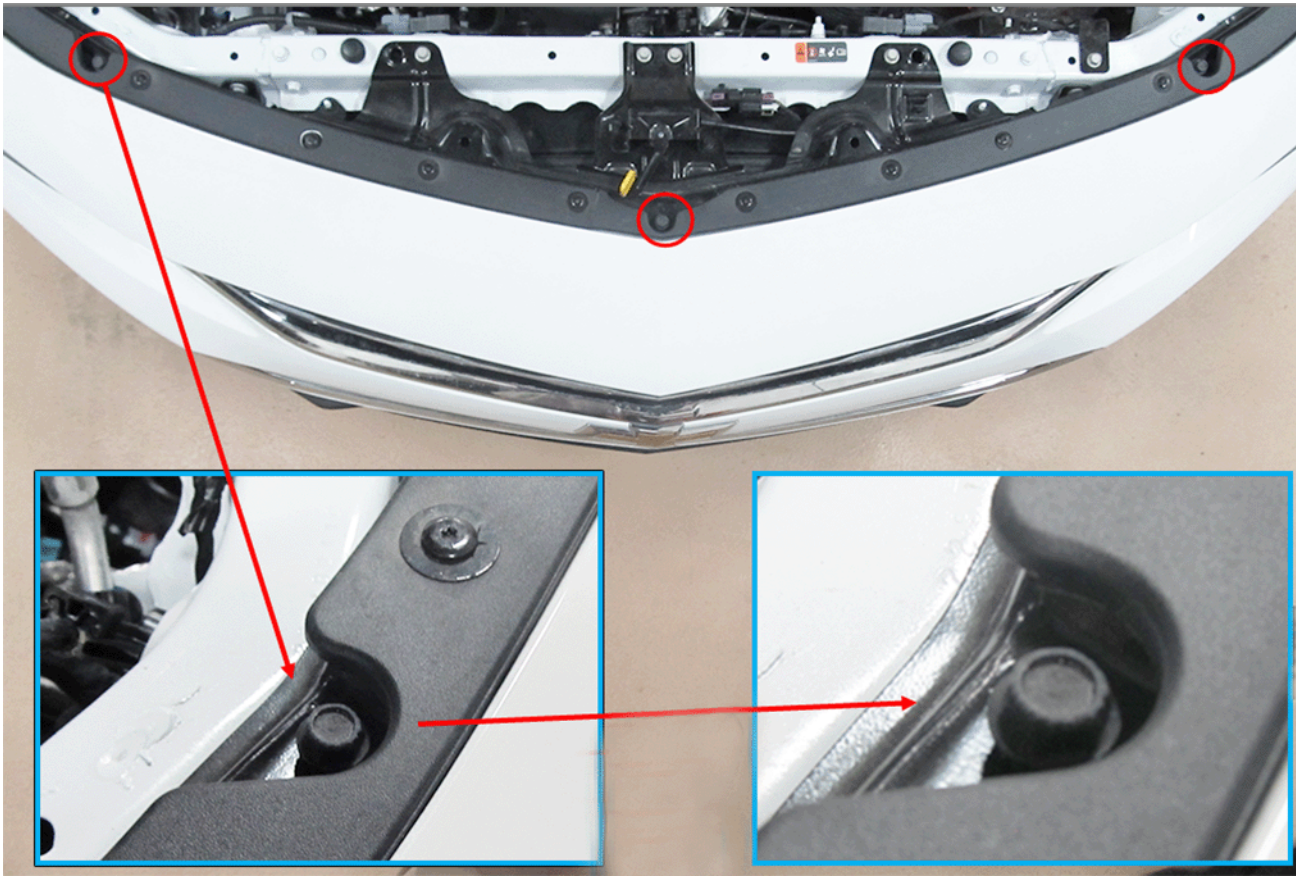

Important: DO NOT attempt to tighten or otherwise move these three fasteners. These fasteners are part of the front fascia support bracket which have a preset gap by design and the plant does not adjust these fasteners when they install the fascia assembly to the car.

Even though they may appear to not be fully seated, no correction is necessary, nor should be attempted. Any adjustment of these fasteners change the vertical clearance between the front fascia and hood, and will compromise the intended gap.

Bulletin Information

Version	1
Modified	

GM bulletins are intended for use by professional technicians, NOT a "do-it-yourselfer". They are written to inform these technicians of conditions that may occur on some vehicles, or to provide information that could assist in the proper service of a vehicle. Properly trained technicians have the equipment, tools, safety instructions, and know-how to do a job properly and safely. If a condition is described, DO NOT assume that the bulletin applies to your vehicle, or that your vehicle will have that condition. See your GM dealer for information on whether your vehicle may benefit from the information.



WE SUPPORT VOLUNTARY TECHNICIAN CERTIFICATION