

LTB01025NAS1

TECHNICAL BULLETIN

14 DEC 2016



© Jaguar Land Rover North America, LLC

NOTE: The information in Technical Bulletins is intended for use by trained, professional Technicians with the knowledge, tools, and equipment required to do the job properly and safely. It informs these Technicians of conditions that may occur on some vehicles, or provides information that could assist in proper vehicle service. The procedures should not be performed by 'do-it-yourselfers'. If you are not a Retailer, do not assume that a condition described affects your vehicle. Contact an authorized Land Rover service facility to determine whether this bulletin applies to a specific vehicle.

INFORMATION

SECTION:

501-00

SUBJECT/CONCERN:

Underbody Splash Shields Loose

AFFECTED VEHICLE RANGE:

MODEL:	MODEL YEAR:	VIN:	ASSEMBLY PLANT:
Discovery Sport (LC)	2015 Onwards	501001 Onwards	Halewood

MARKETS:

NAS

CONDITION SUMMARY:**SITUATION:**

A scraping or wind noise may be heard and/or the underbody body splash shield may be loose/hanging down from the underside of the vehicle.

CAUSE:

This may be caused by the splash shield being manufactured away from the required specification.

ACTION:

Should a Customer express a concern, follow the Service Instruction below.

PARTS:

PART NUMBER	DESCRIPTION	QUANTITY:
LR093615	Splash Shield - LH	1
LR093614	Splash Shield - RH	1

WARRANTY:**NOTES:**

- Repair procedures are under constant review, and therefore times are subject to change; those quoted here must be taken as guidance only. Always refer to TOPIx to obtain the latest repair time.
- DDW requires the use of causal part numbers. Labor only claims must show the causal part number with a quantity of zero.

DESCRIPTION	SRO	TIME (HOURS)	CONDITION CODE	CAUSAL PART
Center Weather Shields - Renew	76.10.89.01	0.3	1	LR061103/LR074799

NOTE:

Normal Warranty procedures apply.

SERVICE INSTRUCTION:


1

WARNING:

Make sure that the vehicle is stable before commencing work.


Raise and support the vehicle (see TOPIx Workshop Manual section 100-02: Jacking and Lifting).

2

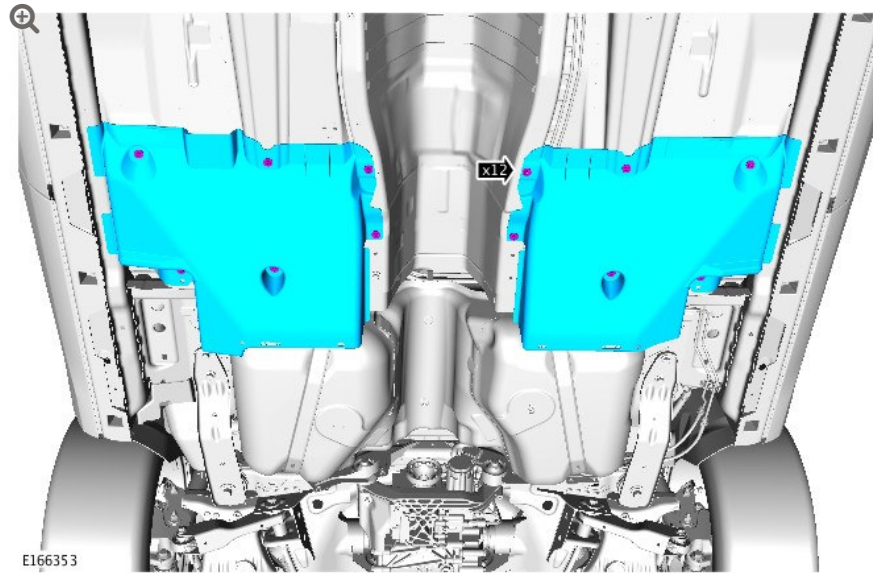

Remove the splash shields.

3

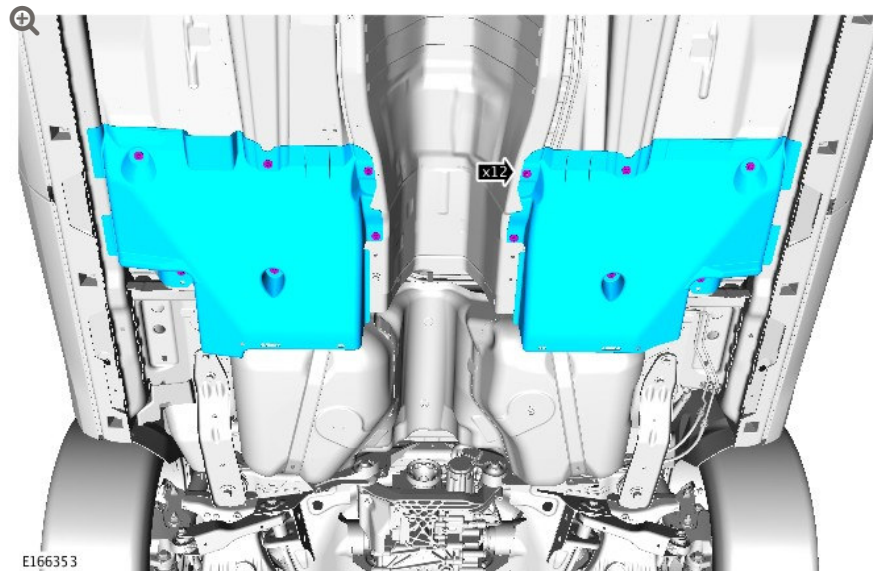

Install the new splash shields.

- Torque: **5Nm**

- ↵ Lower the vehicle (see TOPIx Workshop Manual section 100-02: Jacking and Lifting).