

Classification:

EL15-041

Reference:

ITB16-040

COPYRIGHT© NISSAN NORTH AMERICA, INC.
Date:

October 5, 2016

2013 JX35 AND 2014 – 2015 QX60; DOOR MIRROR GLASS WILL NOT RETURN AFTER SHIFTING REVERSE TO DRIVE

APPLIED VEHICLES: 2013 JX35 (L50) equipped with ADP
 2014 – 2015 QX60 (L50) equipped with ADP
 2014 – 2015 QX60 Hybrid (L50) equipped with ADP

APPLIED VIN: 2013 – 2014, all VIN's
 2015, built before 5N1AL0M(*)FC 525221 / April 7, 2015

APPLIED DATE: Built before April 8, 2015


IF YOU CONFIRM

The door mirror glass (LH and RH) automatic tilt down-up feature does not return the glass to original position after shifting from reverse to drive.

ACTION

Replace the Automatic Drive Positioner (ADP) Control Unit.

- Use the new part listed in the Parts Information.
- Refer to the Electronic Service Manual (ESM), section ADP-Automatic Drive Positioner, for replacement information.

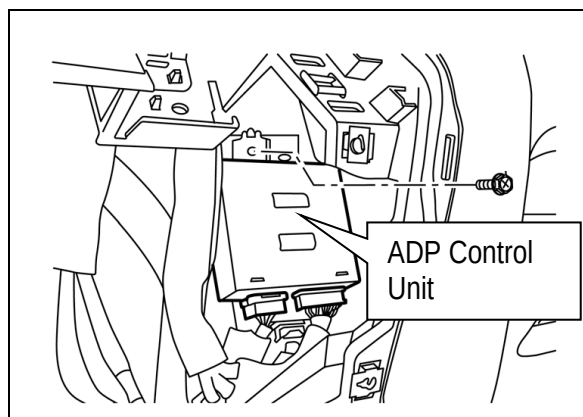

Infiniti Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. NOTE: If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Infiniti retailer to determine if this applies to your vehicle.

PARTS INFORMATION

Description	PART number	Quantity
CONTROLLER ASSEMBLY-POWER SEAT (ADP Control Unit)	28565 – 3JA1A	1

CLAIMS INFORMATION

Submit a Primary Part (PP) type claim using the following claims coding:

DESCRIPTION	PFP	OP CODE	SYM	DIA	FRT
Replace ADP Control Unit	28565 – 3JA1A	VH72AA	HD	32	(1)

(1) Reference the current Infiniti Warranty Flat Rate Manual and use the indicated FRT.

