



903 SOUTH MAIN STREET • P.O. BOX 460 • MIDDLEBURY, IN 46540 • TELEPHONE: (800) 945-4787 • WWW.STARCRAFTRV.COM

April 2016

Technical Service Bulletin Notification TSB #16-010

Name

Address

City st zip

Country

Dear Valued Starcraft Dealer:

Starcraft has determined that certain Model Year 2016 and 2017 AR-ONE Maxx travel trailers and fifth wheels, Launch, Launch Ultra Lite, Autumn Ridge and Travel Star travel trailers require installation of a 3amp fuse to protect the circuit going to the LED lights in the LCI awning.

Our records indicate the following units are part of your current inventory and require the repair prior to being retail sold.

Serial number

If you have sold the vehicle listed, please contact the current owner regarding this Service Bulletin and process the Warranty Registration of your customer. All information concerning this TSB is available to you on Starcraft Connect under the Service and Parts Tab. If you have questions, please contact Starcraft Customer Service at 800-945-4787.

We apologize for any inconvenience this may cause. However, we are confident that this improvement will contribute to our Customers' continued satisfaction with their Starcraft product.

Sincerely,
Starcraft

TECHNICAL SERVICE BULLETIN

TSB#: 16-010 Job Code: 9802289 Flat Rate: .4hr

Date of Publication:

**NOTE: This Technical Service Bulletin will be valid within (1) year from the original date of publication.
REQUIRES PARTS KIT**

Action Required

Install 3amp fuse for LED awning lights

Affected Units

		2016	2017
AR-ONE MAXX FW	24RKS	G27A 5052-5139	H27A 5051-5069
	26BHS	G27B 5052-5136	H27B 5051-5094
	25RLS	G27C 5050	
AR-ONE MAXX TT	27BHS	G28D 5178-5308	H28D 5051-5074
	26BH	G28F 5134-5242	H28F 5051-5078
	21FB	G28J 5191-5284	H28J 5071-5106
	28QBS	G28K 5075-5097	
	23FB	G28N 5051-5085	H28N 5051-5064
	26BHS	G28T 5050-5106	H28T 5051-5065
	25BHS	G28X 5119-5146	
	28FBS	G28Y 5079-5120	H28Y 5051-5061
	30BHU	G28Z 5120-5187	H28Z 5051-5061
	26HR		H29P 5051-5074
	29HR		H29R 5050
AR-ONE MAXX TOY HAULER TT	26HR	G29P 5050-5101	
LAUNCH TT	17QB	G26A 5050-5051	
	17BH		H2GB 5050-5051
	19BHS	G2J9 5089-5148	H2J9 5053-5076
	16RB	G2JP 5213-5361	H2JP 5051-5088
	18BH	G2JW 5075-5097	
	17FB	G2JX 5082-5120	
LAUNCH ULTRA LITE TT	31BHT	G2JH 5053-5103	H2JH 5051-5066
AUTUMN RIDGE TT	326TSI	G28A 5051-5089	
TRAVEL STAR TT	335RLK	G2J5 5051-5052	

Parts Kit 16-010S

Note: Kit can only be ordered using the order form included with this bulletin.



- 1 Fuseholder
- 1 Scotch lock connector 18-14 ga Blue
- 1 Connector, IDC .25 female Blue
- 1 3 Amp fuse

Tools



Screw gun & #2 square drive bit
Wire cutters
Pliers
Standard Screwdriver





INSTRUCTIONS

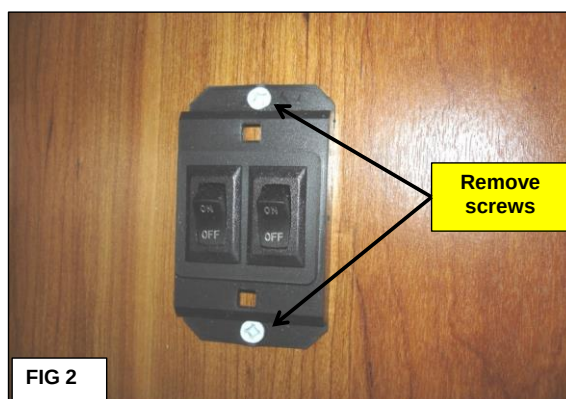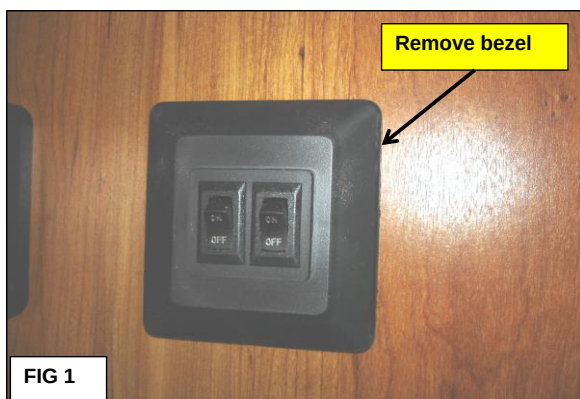

- 1 **Fig 1:** Locate the LED awning switch on the cabinet just inside the entrance door.
Remove the outer bezel by prying gently with a screwdriver.
Fig 2: Remove 2 screws holding the switch assembly to the panel.

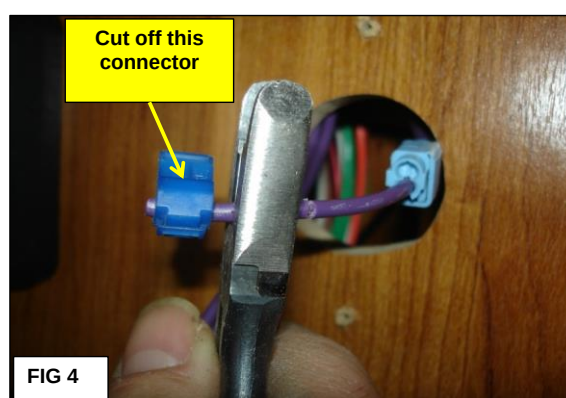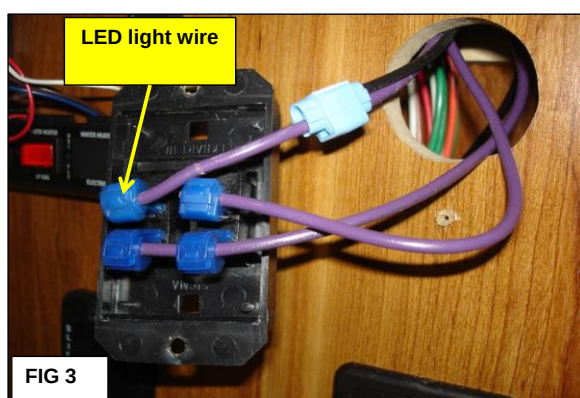

- 2 **Fig 3:** Pull the switch out of the panel and turn it over to locate the connection with the purple & black wires.
Fig 4: Unplug the wire from the switch, and cut off the blue connector on the end of the purple wire for the LED light.

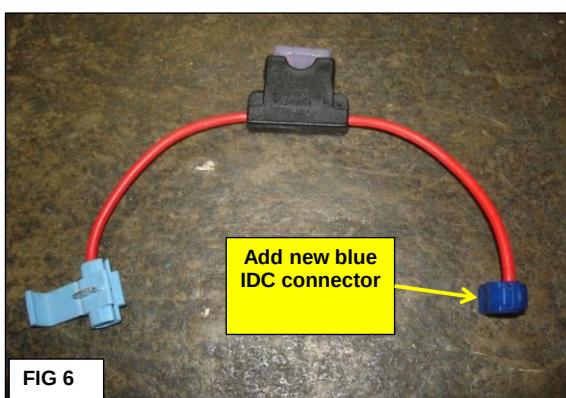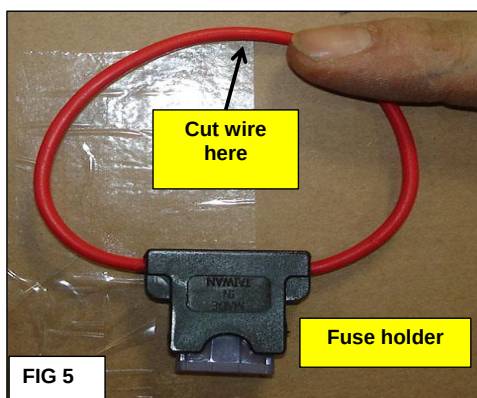

- 3 **Fig 5:** Cut the 14ga wire(red) of the fuse holder wire to make two ends.
Fig 6: Crimp a new blue IDC connector to one end of the 14ga fuse holder wire.
Place a Scotch lock connector on the other end of the 14ga wire but **DO NOT CRIMP AT THIS POINT.**

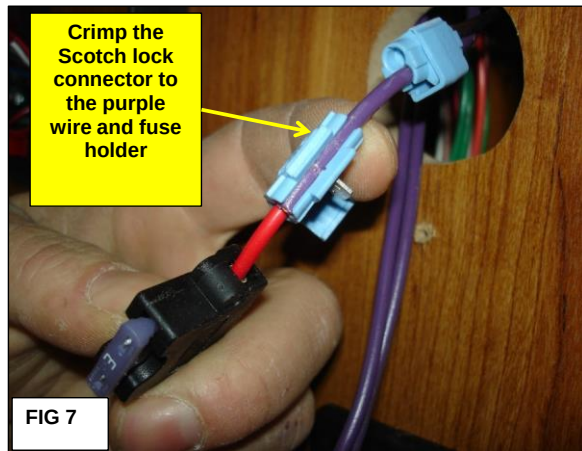


FIG 7

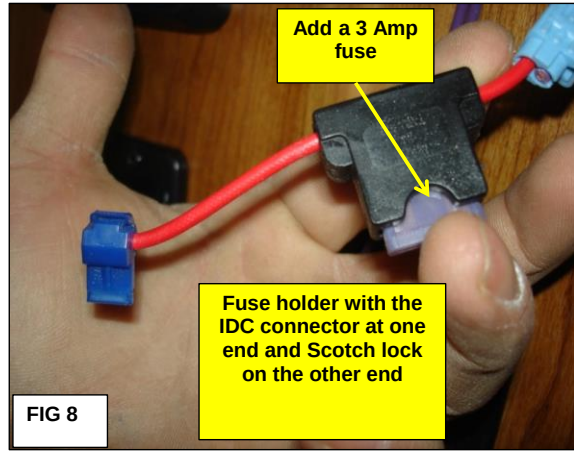


FIG 8

- 4 **Fig 7:** Crimp the Scotch lock connector on the red 14ga wire to the same purple wire you cut off the connector in step 2.(LED Light wire)
Fig 8: Place a 3 amp fuse in the fuseholder.

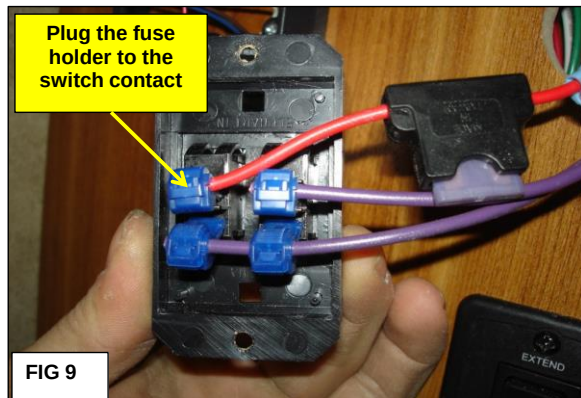


FIG 9



FIG 10

- 5 **Fig 9:** Plug the IDC connector for the fuseholder to the switch contact.
Fig 10: Push the wiring back into the hole, and replace the switch assembly. Secure the switch to the cabinet with the 2 screws removed earlier. Replace the switch bezel. Test the switch to turn on the LED awning lites.



903 SOUTH MAIN STREET • P.O. BOX 460 • MIDDLEBURY, IN 46540 • TELEPHONE: (800) 945-4787 • WWW.STARCRAFTRV.COM

April 2016

Technical Service Bulletin Notification TSB #16-010

Unit Serial Number: «SERIAL_»

Name

Address

City st zip

Country

Dear Valued Starcraft RV Owner:

Starcraft has determined that certain Model Year 2016 and 2017 AR-ONE Maxx travel trailers and fifth wheels, Launch, Launch Ultra Lite, Autumn Ridge and Travel Star travel trailers require installation of a 3amp fuse to protect the circuit going to the LED lights in the LCI awning.

Our records indicate that your unit is affected by this Service Bulletin. Please contact your nearest Starcraft dealer to schedule an appointment and present this letter as authorization to have the procedure completed. This procedure will be performed at no cost to you.

The coverage period for this Technical Service Bulletin is for one (1) year from the release of this notification. (April 2016 – April 2017) If you have sold or traded your vehicle, or for any reason cannot have this service performed, please contact the Starcraft Customer Service Department at 800-945-4787.

We apologize for any inconvenience this may cause. However, we are confident that this improvement will contribute to your continued satisfaction with your Starcraft product.

Sincerely,
Starcraft



LIPPERT
COMPONENTS™

www.lippertcomponents.com

March 2, 2016

RE: Awning LED Lighting

Dear Valued Customer:

Lippert Components has made a change to its Solera Power Awning with LED light options OEM installation manual. LCI has seen a small number of resistive short conditions in circuits that use a 5A fuse or greater, which may have caused heat damage to the circuit and/or rendered the LED light inoperable. As a product improvement and to insure circuit integrity, we are requesting that units built with LCI LED light strips that are protected with a fuse greater than 3A, or that are not fused according to OEM installation manual, have the fuse changed/installed with a 3A (max) fuse. All components of the awning assembly comply with FMVSS 302 (Standards for the "Flammability of Interior Materials" in a vehicle) and our investigation to date has revealed that the low temperature resistive short event may cause minimal damage and does not pose a fire or safety risk.

The new installation instructions are available on line at:

[http://www.lci1.com/assets/content/support/manuals/Solera Power Awning with LED Lights Installation Manual.pdf](http://www.lci1.com/assets/content/support/manuals/Solera_Power_Awning_with_LED_Lights_Installation_Manual.pdf)

or through your LCI sales representative.

Please feel free to direct any questions or concerns to myself or your LCI sales representative.

We appreciate your business and thank you in advance for your time and attention to this matter.

Sincerely,

Scott McKinnon
Product Manager
c: 269.832.6800
smckinnon@lci1.com



LIPPERT
COMPONENTS™
Chassis Body Interior



NYSE:DW

Frequently Asked Questions:

- 1) Does LCI supply this fuse with the light kit? No, the specified fuse is supplied by the OEM during installation.
- 2) Will a new part number be required? Not from LCI – our awning and light kit part numbers will remain the same.
- 3) When should the change be made? We are requesting the change be made as an immediate running change.