




Service Bulletin


TECHNICAL

Subject: Rattle or Buzz Noise from Rear of Vehicle and/or Rear Wheel Liner Hanging Down

| Brand: | Model: | Model Year: | | VIN: | | Engine: | Transmission: |
|----------|--------|-------------|------|------|----|---------|---------------|
| | | from | to | from | to | | |
| Cadillac | CT6 | 2016 | 2017 | | | All | All |

| | |
|-----------------------------------|---|
| Involved Region or Country | North America and N.A. Export Regions |
| Condition | Some customers may comment on a rattle or buzz noise from the rear of the vehicle or that the rear wheel liner(s) are hanging down. |
| Cause |  <p>This may be due to incorrect installation of the j-clips installed onto the wheel liner and not onto the sheet metal.</p> |

Correction

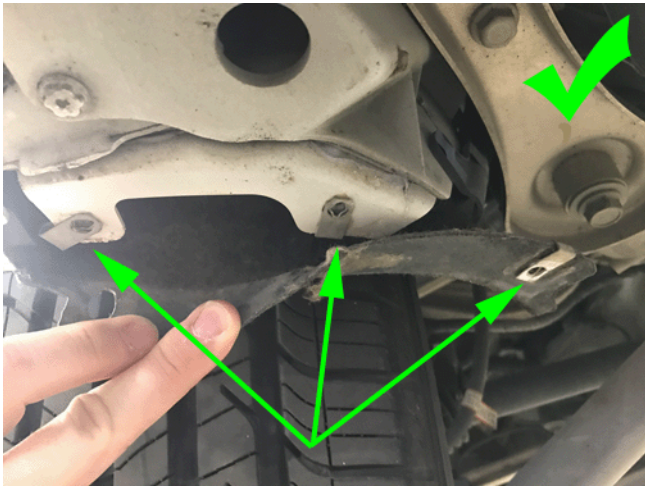

If you encounter a vehicle with the above concern, install the j-clips onto the sheet metal flange as illustrated above and re-insert the 3 screws.

Warranty Information

For vehicles repaired under warranty, use:

| Labor Operation | Description | Labor Time |
|--|---------------------------------------|------------|
| 1480748* | Install J-Clips On Sheet Metal Flange | 0.4 hr |
| *This is a unique Labor Operation for Bulletin use only. | | |

| | |
|----------|---|
| Version | 1 |
| Modified | |

GM bulletins are intended for use by professional technicians, NOT a "do-it-yourselfer". They are written to inform these technicians of conditions that may occur on some vehicles, or to provide information that could assist in the proper service of a vehicle. Properly trained technicians have the equipment, tools, safety instructions, and know-how to do a job properly and safely. If a condition is described, DO NOT assume that the bulletin applies to your vehicle, or that your vehicle will have that condition. See your GM dealer for information on whether your vehicle may benefit from the information.



WE SUPPORT VOLUNTARY TECHNICIAN CERTIFICATION