

SERVICE CAMPAIGN BULLETIN


TITLE:	Upper D Loop Seatbelt Securing Nut
CAMPAIGN REFERENCE	03Z
DOCUMENT NUMBER:	11 N 014
AFFECTED VEHICLES:	McLaren 675LT
SITUATION:	Quality Engineering at McLaren Automotive would like to inform retailers that customers may experience a rattle coming from the B-Pillar area. Retailers are required to check the torque of the upper D loop seatbelt securing nut.
PROCEDURE:	Please follow the procedure outlined in this document .

Removal:

1. Please refer to AC-RM-06N06-01-007 - Remove/Install B-Pillar finisher - 675LT.

Instructions:

1. Check the D loop nut and bolt (1) is torqued to 35Nm on the drivers and passenger seat belts.

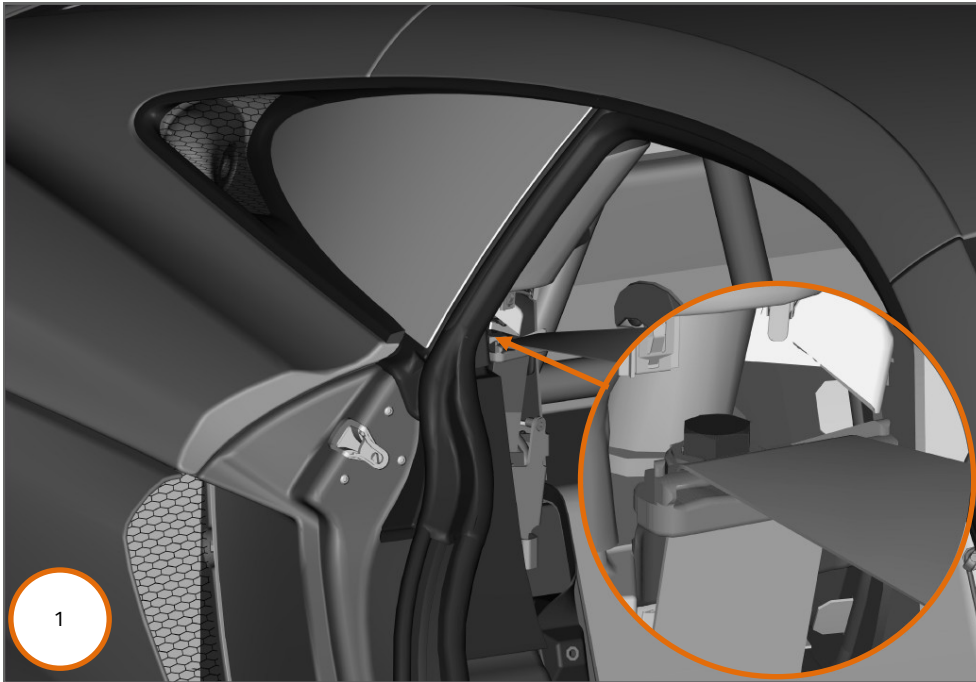

2. If torqued correctly no further action is required.
3. If torque is incorrect torque to 35Nm.
4. Install components in reverse order .

Please contact your Regional Aftersales Manager should you have any questions relating to the information contained within this bulletin.

WARRANTY INFORMATION

DESCRIPTION	RESOLUTION CODE	TOTAL REPAIR TIME
D Loop Torque Check	N0N40113A11A2D04	1.00 hours

PARTS INFORMATION

DESCRIPTION	PART NUMBER	QUANTITY	ORDER PROCESS
N/A	N/A	N/A	N/A

All bulletins (Information/Campaign/Recall) issued by McLaren Automotive Limited ("McLaren") are intended only for use by technicians who have attended McLaren technical training courses. McLaren trained technicians have the equipment, tools, safety instructions and the know-how to perform the job properly and safely. McLaren Bulletins are written to inform McLaren technicians of conditions that may occur on some McLaren vehicles, or to provide information that could assist diagnosing a McLaren vehicle. Part numbers listed in McLaren bulletins are for reference only. Always check with the parts department to verify the latest part numbers. The information contained in McLaren bulletins are for internal use only by McLaren Authorised Retailers and must not be published on external website or social media forums etc.