

EM13-007a

Classification:

Reference:

December 17, 2014

Date:

## 2013-2014 SENTRA; **ENGINE UPPER TORQUE ROD SERVICE INFORMATION**

NTB14-003a

The Title, APPLIED VEHICLES, and SERVICE INFORMATION have been amended. Please discard previous versions of this bulletin.

**APPLIED VEHICLE:** 2013-2014 Sentra (B17) APPLIED VINs and DATES: See SERVICE INFORMATION

## SERVICE INFORMATION

This bulletin explains the application of the passenger side upper torque rod for all **APPLIED VEHICLES.** 

**2013 Sentra:** All models are equipped with an upper torque rod.

These vehicles have an engine mounting insulator that requires an upper torgue rod. •

2014 Sentra: All SV, SL, and SR models DO NOT HAVE an upper torgue rod. DO NOT INSTALL an upper torque rod on these models for any reason.

- These vehicles have a redesigned engine mounting insulator that does not require an upper torque rod.
- \* 2014 Sentra: S models built BEFORE 3N1AB7AP(\*)EL 606447 and November 2, 2013 are equipped with an upper torque rod.
  - These vehicles have an engine mounting insulator that requires an upper torque rod.

2014 Sentra: S models built ON and AFTER 3N1AB7AP(\*)EL 606447 and November 2, 2013 DO NOT HAVE an upper torque rod. DO NOT INSTALL an upper torque rod on these models for any reason.

These vehicles have a redesigned engine mounting insulator that does not require an upper torque rod.

See photos on the next page.

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. NOTE: If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

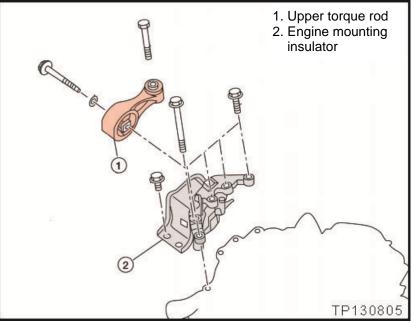






Figure 2

Figure 3

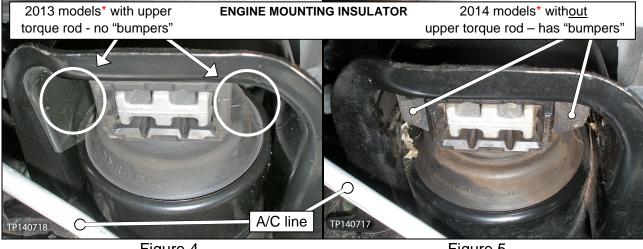


Figure 4

Figure 5

\* See page 1.