



Technical Journal

TITLE:

Tailgate, power operated tailgate

REF NO: TJ 29700.6.0	ISSUING DEPARTMENT: Technical Service	CAR MARKET: United States and Canada	
PARTNER: 3 US 7510 Volvo Car USA		ISSUE DATE: 2016-10-21	STATUS DATE: 2016-10-25
FUNC GROUP: 8321	FUNC DESC: Boot lid; tailgate	Page 1 of 3	

“Right first time in Time”

Attachment

File Name	File Size
TJ29700.jpg	0.0950 MB

Vehicle Type

Type	Eng	Eng Desc	Sales	Body	Gear	Steer	Model Year	Plant	Chassis range	Struc Week Range
136							2011-2015	21	0104554-0228371	201046-201512
156							2012-9999	22	0237068-9999999	201120-999912

CSC Customer Symptom Codes

Code	Description
1K	Tailgate/trunk lid/Automatic opening/closing does not work

VST Operation Number

DTC Diagnostic Trouble Codes

Rows beginning with * are modified

Note! If using a printed copy of this Technical Journal, first check for the latest online version.



Text

DESCRIPTION:

- * Change in the chassis range for vehicle type 156
- * (PCU) power closing unit

Customer may experience that the tailgate does not go into closed position when using the power operated tailgate.


SERVICE:

Verify that the bowden cable ball is connected in the (PCU) power closing unit according to attached picture (TJ29700), if loose reconnect the bowden cable ball to the (PCU) power closing unit.

VEHICLE REPORT:

Yes, please submit a Vehicle Report if the service solution described in this TJ has no effect. Use concern area "Vehicle Report" and sub concern area "Support not needed", use function group 8321.

To view TJ attachment continue to next page. This TJ has one attachment.

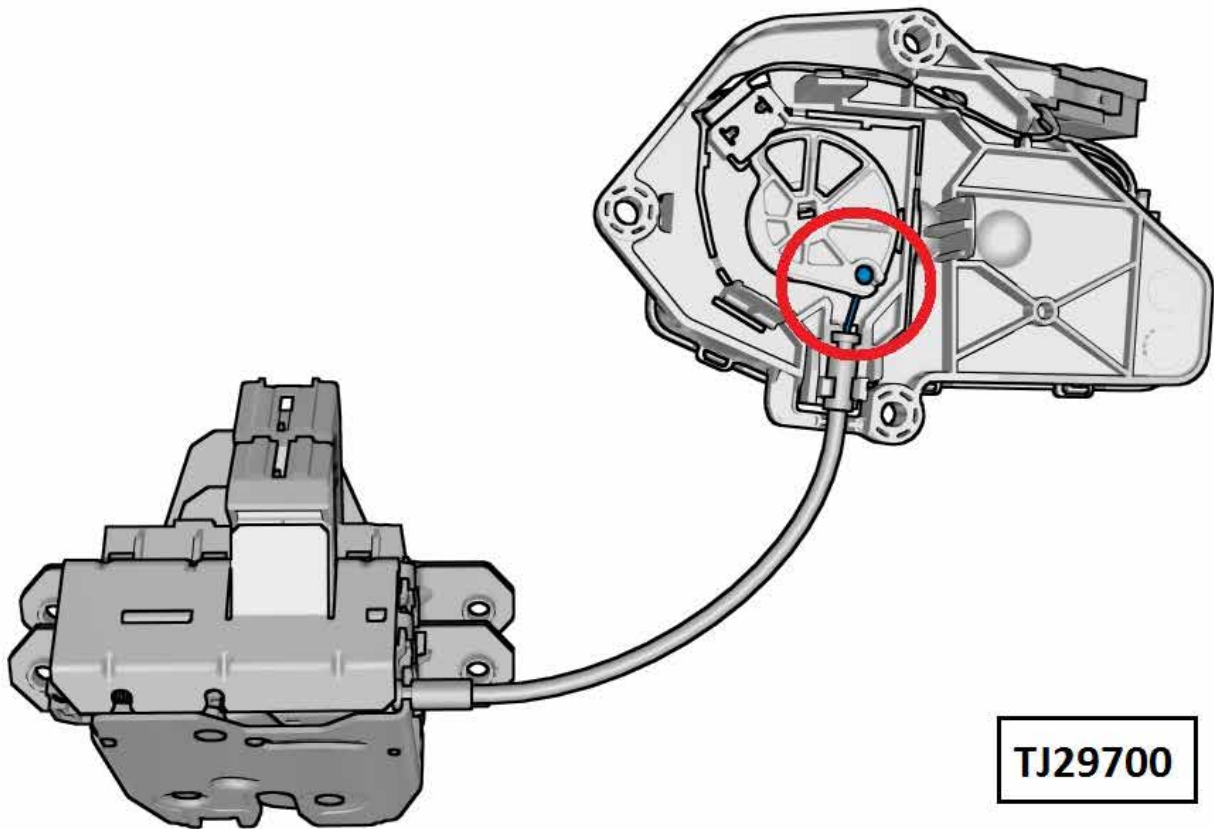

TJ29700