


2016 CX-3 - Exterior Buzz / Rattle Type Noise at 2400 RPM


Some customers may complain about a buzz/rattle type noise at 2400 RPM. The noise can be heard at a stop or while driving. This may be caused by an EVAP Hose making contact with the vehicle underbody.

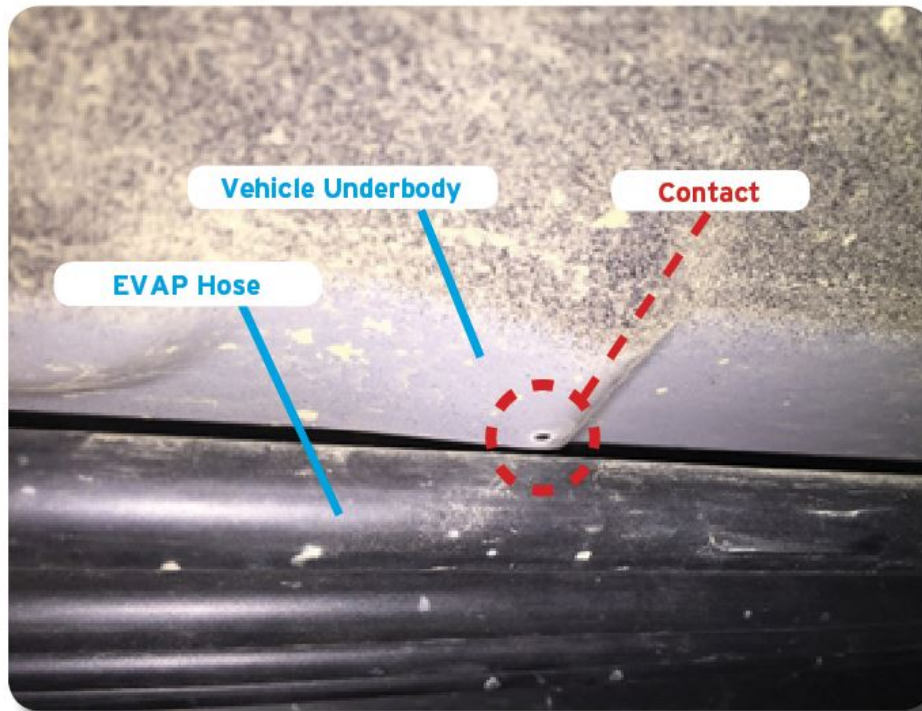

Repair

Apply foam tape on EVAP hose to eliminate noise.

Note: Use foam tape from Noise Parts Set P/N TA01-76-100 or equivalent.

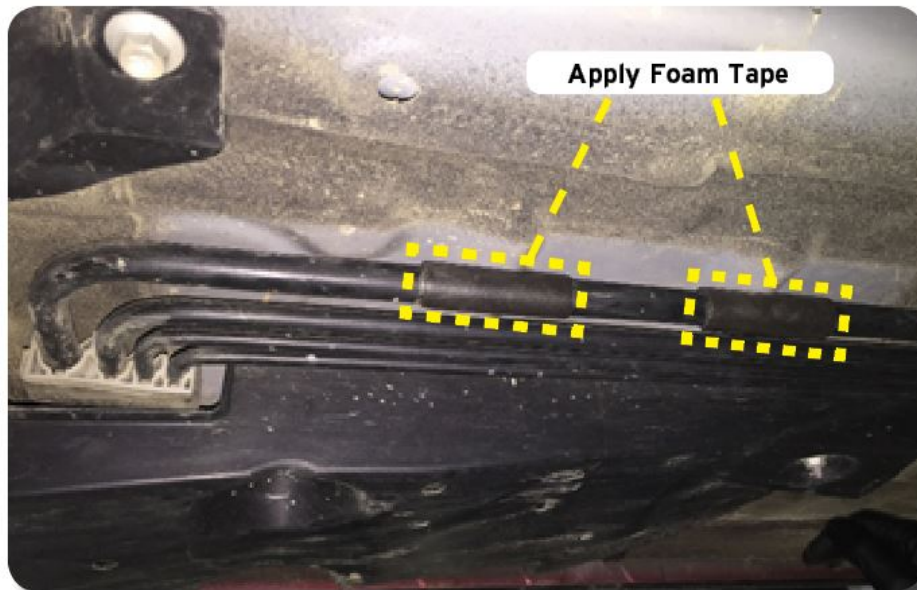

An editorial board comprised of MNAO service staff members generates, collects, and verifies information for this publication. © 2016 Mazda Motor of America, Inc.

To contribute repair tip ideas, send an e-mail to mtips@mazdausa.com or fax to (949) 442-6599. If we select your repair tip, you will receive 10,000 Reward Performance by Mazda (RPM) points for your efforts. All contributions become property of MNAO, which assumes permission to publish them without further consideration.