

Technical Service Bulletin



90 Oil change service interval not displayed

90 16 66 2043855/2 April 5, 2016. Supersedes Technical Service Bulletin Group 90 number 16-65 dated April 1, 2016 for reasons listed below.

Model(s)	Year	VIN Range	Vehicle-Specific Equipment
2017	A4	All	Not Applicable

Condition

REVISION HISTORY		
Revision	Date	Purpose
2	-	Revised header data (Corrected Elsa display error)
1	4/1/2016	Initial publication

During PDI, the MIB display does not show the initial 10,000 mile service interval counter.

Technical Background

The maintenance interval displayed on the MIB screen (Figure 1) has not fully synced with the instrument cluster at time of PDI.

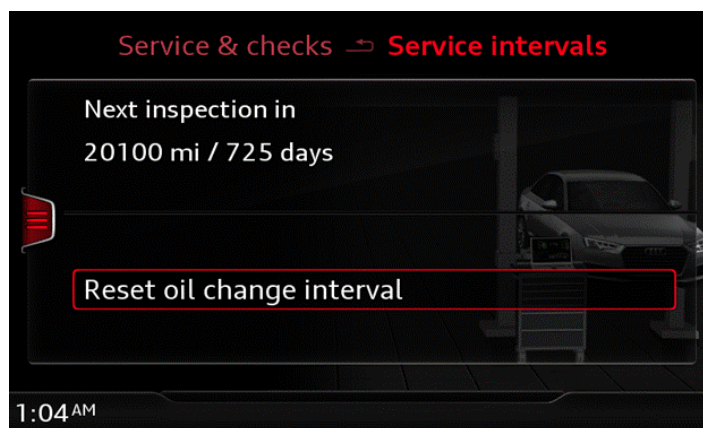


Figure 1. Service intervals menu is not showing the 10,000 mile service counter.

Production Solution

Not applicable.

Service

During PDI, If the initial 10,000 mile service interval counter is missing from the Service intervals menu in the MIB, the interval must be reset so that it will be populated in the MIB menu.

! **Note:**

This will reset the counter to 10,000 miles, so it should only be done during PDI.

Select “Reset oil change interval” from the Service intervals menu. Follow the prompts and confirm the reset (Figure 2).

After the oil change interval has been reset, the 10,000 mile counter and the 20,000 mile counter will be displayed in the Service intervals menu (Figure 3).



Figure 2. Confirm the oil change interval reset.



Figure 3. 10,000 mile counter and 20,000 mile counter displayed in the Service intervals menu of the MIB.

Warranty

This TSB is informational only and not applicable to any Audi warranty.

Additional Information

All parts and service references provided in this TSB (2043855) are subject to change and/or removal. Always check with your Parts Department and service manuals for the latest information.