
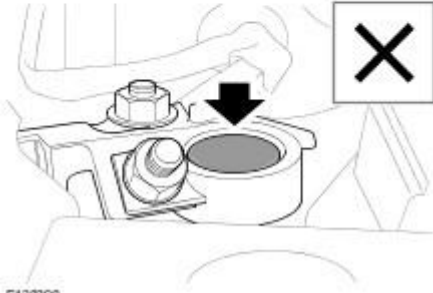


Reference	SSM72631
Models	F-TYPE / X152 XJ / X351
Title	Battery terminals have not been fitted correctly during the PDI process
Category	Electrical
Last modified	09-Feb-2016 00:00:00
Symptom	203000 Basic Electrical
Attachments	battery terminals pic.pdf (battery terminals pic.pdf)
Content	<p><u>Issue</u></p> <p>There have been incidents of road side assistance being required because the battery terminals have not been fitted correctly as part of the PDI process.</p> <p><u>Cause</u></p> <p>Battery terminal has not been secured correctly</p> <p><u>Action</u></p> <p>Please ensure that when removing the transit relay that both battery terminals are fully pushed down (see attachment) and tightened correctly to 6Nm.</p> <p>This information can be found in the Pre Delivery Inspection Manual under section. 1 General Information, 101 Pre Delivery Information, 101-01 Pre delivery Manual, Preliminary.</p>

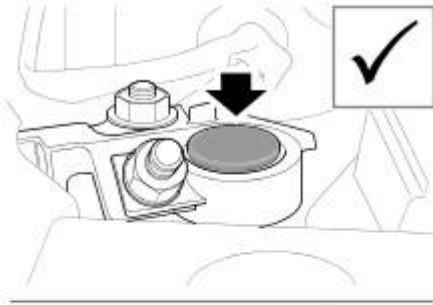

E138398