



# Service Bulletin

## PRELIMINARY INFORMATION

**Subject:** Coolant Loss And/Or Coolant Odor

**Models:** 2015-2017 Cadillac Escalade  
2014-2017 Chevrolet Corvette  
2014-2017 Chevrolet Silverado 1500  
2015-2017 Chevrolet Suburban, Tahoe  
2014-2017 GMC Sierra 1500  
2015-2017 GMC Yukon, Yukon XL  
Engine 4.3L LV3 5.3 L83 6.2 L86

*This PI was superseded to update Model Years. Please discard PIP5330.*


The following diagnosis might be helpful if the vehicle exhibits the symptom(s) described in this PI.

### Condition/Concern

A vehicle may have a concern with coolant loss and/or coolant odor after driving the vehicle.

### Recommendation/Instructions

If the coolant is low pressure test the cooling system looking for leaks at the outer head bolts. See below

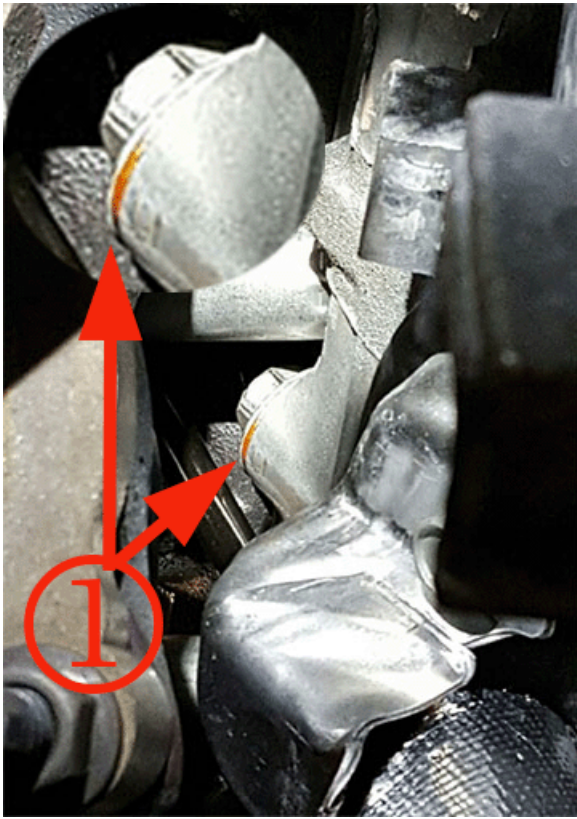

If a leak is found the head with the concern will need to be replaced.

### Warranty Information

Labor Operation	Description	Labor Time
4061770	Cylinder Head Replacement - Right Side	Use Published Labor Operation Time
4061790	Cylinder Head Replacement - Left Side	Use Published Labor Operation Time

Please follow this diagnostic or repair process thoroughly and complete each step. If the condition exhibited is resolved without completing every step, the remaining steps do not need to be performed.

GM bulletins are intended for use by professional technicians, NOT a "do-it-yourselfer". They are written to inform these technicians of conditions that may occur on some vehicles, or to provide information that could assist in the proper service of a vehicle. Properly trained technicians have the equipment, tools, safety instructions, and know-how to do a job properly and safely. If a condition is described, DO NOT assume that the bulletin applies to your vehicle, or that your vehicle will have that condition. See your GM dealer for information on whether your vehicle may benefit from the information.



WE SUPPORT VOLUNTARY TECHNICIAN CERTIFICATION