



# Preliminary Information

## PIP5457C Surge hesitation Chuggle Misfire Feeling With A Light Tip In

### Models


Brand:	Model:	Model Years:	VIN:		Engine:	Transmissions:
			from	to		
Chevrolet	Silverado 2WD	2017	SOP	END	5.3L	6-Speed
Chevrolet	Silverado 4WD	2017	SOP	END	5.3L	6-Speed
Chevrolet	Tahoe 2WD	2017	SOP	END	5.3L	6-Speed
Chevrolet	Tahoe 4WD	2017	SOP	END	5.3L	6-Speed
Chevrolet	Suburban 2WD	2017	SOP	END	5.3L	6-Speed
Chevrolet	Suburban 4WD	2017	SOP	END	5.3L	6-Speed
GMC	Sierra 2WD	2017	SOP	END	5.3L	6-Speed
GMC	Sierra 4WD	2017	SOP	END	5.3L	6-Speed
GMC	Yukon 2WD	2017	SOP	END	5.3L	6-Speed
GMC	Yukon 4WD	2017	SOP	END	5.3L	6-Speed
GMC	Yukon XL 2WD	2017	SOP	END	5.3L	6-Speed
GMC	Yukon XL 4WD	2017	SOP	END	5.3L	6-Speed

Involved Region or Country	North America
Additional Options (RPO)	L83; MYC
Condition	A vehicle may have a concern of a hesitation, chuggle, fishbite or roughness that can be felt in gear ranges 3rd – 6th gear V8 mode, TCC locked, low RPM's (1200 – 1300), when tipping into throttle to load engine.
Cause	Unknown at this time

### Correction:

Test Drive and verify Customer Concern of Chuggle, Fishbite or Roughness with no diagnostic codes.

Note: This can be confirmed with Picoscope as 10+/-2 Hz frequency.

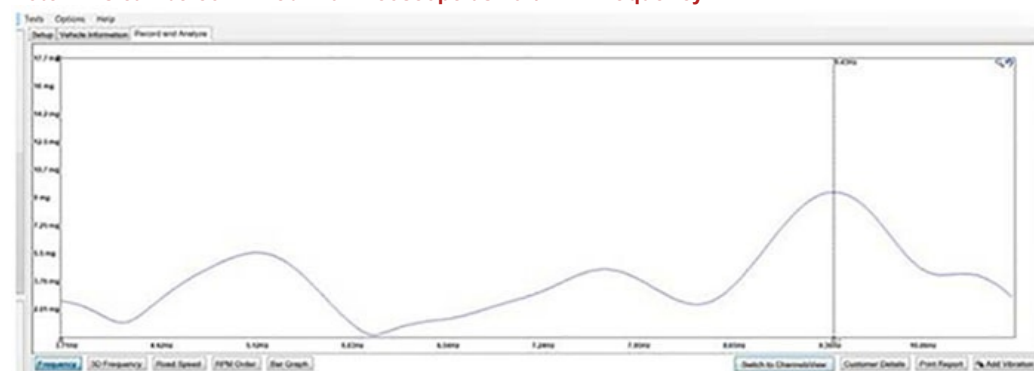

Engineering is aware of the concern and working on a fix. When this becomes available this PI will be updated.

### Warranty Information

Labor Operation	Description	Labor Time
4081488*	Test Drive and verify Customer Concern Of Chuggle, Fishbite or Roughness In 3rd Gear	0.3 hr
*This is a unique Labor Operation for Bulletin use only.		

### Version History

Version	Description
3	1/12/2017- Updated Title, Condition and Warranty Information.

Modified

1/16/2017- Update Condition and Models.

2/9/2017- Updated condition and correction



©2016 General Motors. All Rights Reserved.