



Bulletin No.: PIT5551A
Published date: 07/5/2017


Preliminary Information

PIT5551A During Start Up Forward Collision System Reduced Displayed on DIC

Models

Brand:	Model:	Model Years:	VIN:		Engine:	Transmissions:
			from	to		
Cadillac	CT6	2016 - 2017	All	All	All	All
Cadillac	Escalade Models	2016 - 2017	All	All	All	All
Cadillac	XT5	2017	All	All	All	All
Chevrolet	Bolt EV	2017	All	All	All	All
Chevrolet	Equinox	2018	All	All	All	All
Chevrolet	Malibu	2016 - 2017	All	All	All	All
Chevrolet	Silverado	2017	All	All	All	All
Chevrolet	Suburban	2017	All	All	All	All
Chevrolet	Tahoe	2017	All	All	All	All
Chevrolet	Volt	2016 - 2017	All	All	All	All
GMC	Acadia	2017	All	All	All	All
GMC	Sierra	2017	All	All	All	All
GMC	Yukon Models	2017	All	All	All	All

Involved Region or Country	North America
Additional Options (RPO)	With Low Speed Forward Automatic Braking RPO (UHY)
Condition	Some owners may comment when they start their vehicle a "Forward Collision System Reduced" message is displayed on the DIC, example shown below. Note: On some 2016 models the message displayed will be "Automatic Collision Prep Reduced".
Cause	This message displays when Forward Automatic Braking (FAB) has been set to the "Alert" setting. This setting disables most FAB functions.

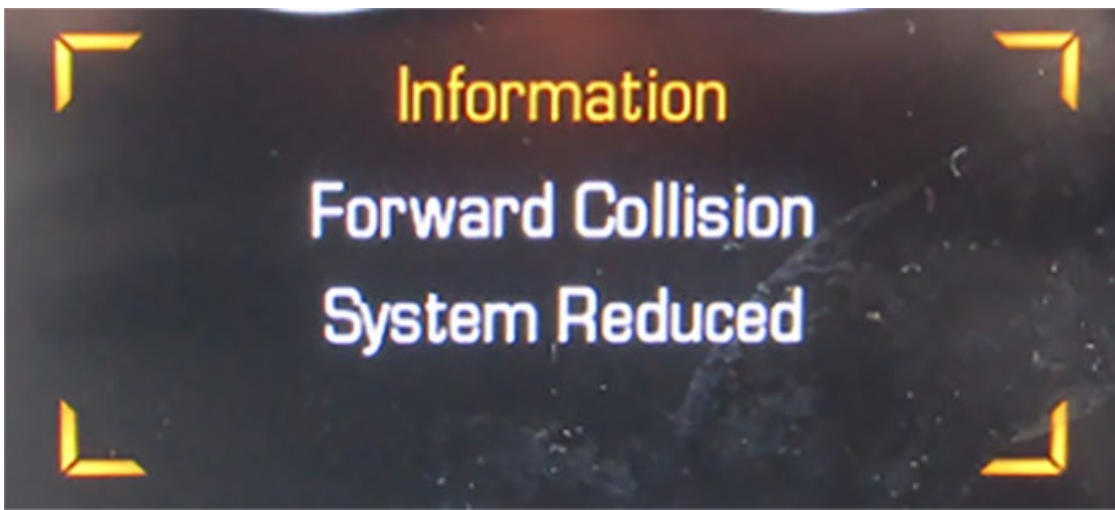

Correction:

NONE. This is normal when the FAB has been set to "Alert".

NOTE: There are three selections for the FAB system (OFF, Alert, Alert and Brake), shown below. If the FAB is set to "Alert and Brake" the message will no longer be displayed when the vehicle is started.



Additional SI Keywords

Automatic Collision Prep Reduced

Version History

Version	2
Modified	7/5/17 to update Models and Condition section.

