

Advanced Technical Information

Panamera (971)

1707 0905

0

Binder - Advanced Technical Information

Deactivating Transport Mode

Attention: **Service Personnel**


Vehicle Type: **Panamera (971)**

Model Year: **2017 to Present**

Concern: Vehicle stuck in Transport Mode at PDI, Fault U110500 - Transport mode active Present.

Information: If after performing a Handover and there are Active faults for Transport Mode, perform the following work around:

- Enter Diagnostics-> Gateway-> Coding Programming-> Customer Specific-> Transport Mode.
- Activate Transport Mode. Disconnect the PIWIS Tester III (PT3G) from the vehicle and cycle the key.
- Connect the PT3G, go back to Transport Mode, and Deactivate.
- Perform a Battery Reset and another Handover.

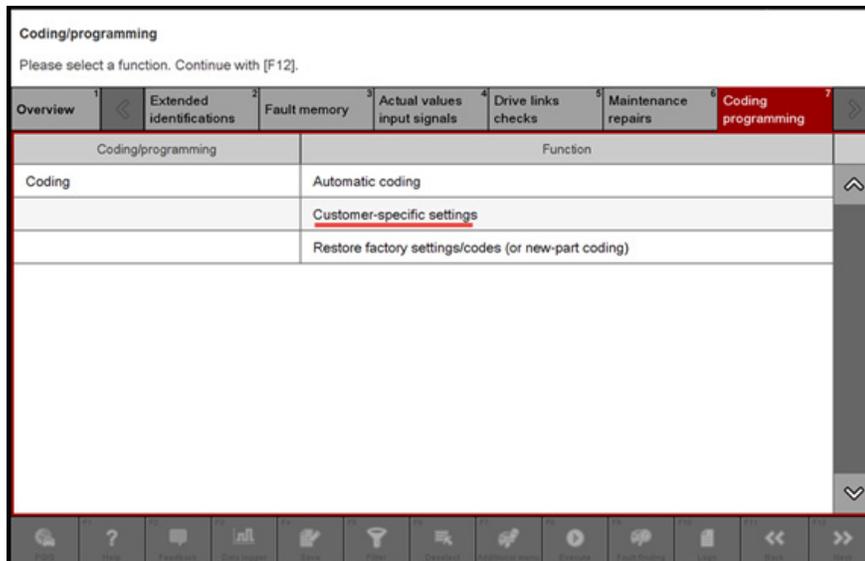


0

Panamera (971)

0905 **1707**

Advanced Technical Information

Information:
(cont'd)

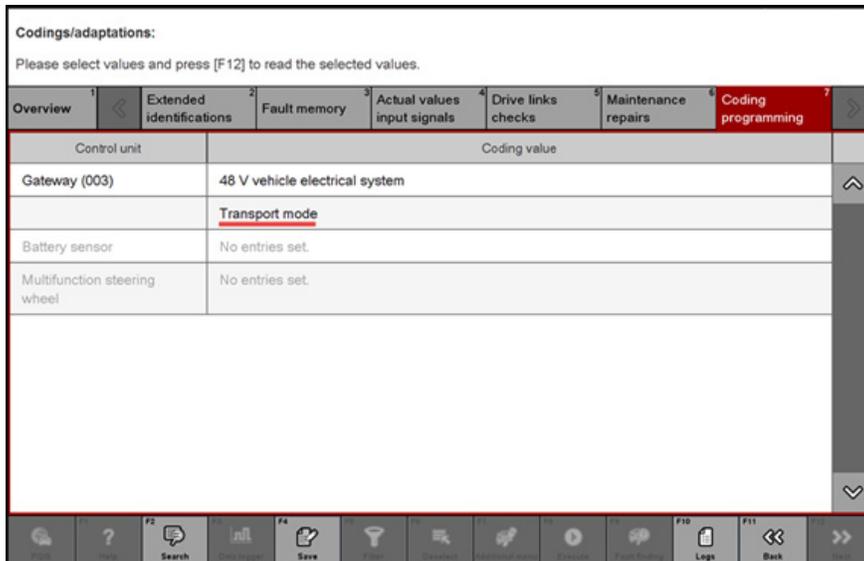

Manually Activating/Deactivating Transport Mode in the Gateway will alleviate the concern.

If further concerns arise, please submit a Porsche Techline Assistance Request (TLAR) in the PTEC System.