



Service Bulletin

16-17

Section

Transmission - 26

Description

Erroneous Fault Codes May Become Active with Column Mounted Shifter and Eaton Automated Manual Transmissions

Release Date

11/20/2017

Introduction

Peterbilt has determined that certain Model 579 and 567 vehicles built with Eaton AMT and a column mounted shifter may exhibit erroneous fault codes that are only visible in DAVIE and Eaton Service Ranger. These fault codes can be ignored. See image below.

Resolution

INFORMATIONAL ONLY

No action is required if full Column Mounted Shifter functionality is present.
A permanent resolution will be communicated when available.

Warranty

This is an informational bulletin


Parts

No parts are required.

Procedure

Ignore the exhibited DAVIE and Eaton Service Ranger faults shown below.

1. Rationality		2. Plausibility		3. Communication		4. Events		All DTCs					
Code	Description	ECU	#	First	Last								
6568-09	CAN communication - Message (ETC7) time-out - from transmission system	RHS	!!										
2539-09	CAN communication - Message (ETC7) time-out - from transmission system	RHS	!!										
3289-09	CAN communication - Message (ETC7) time-out - from transmission system	RHS	!!										

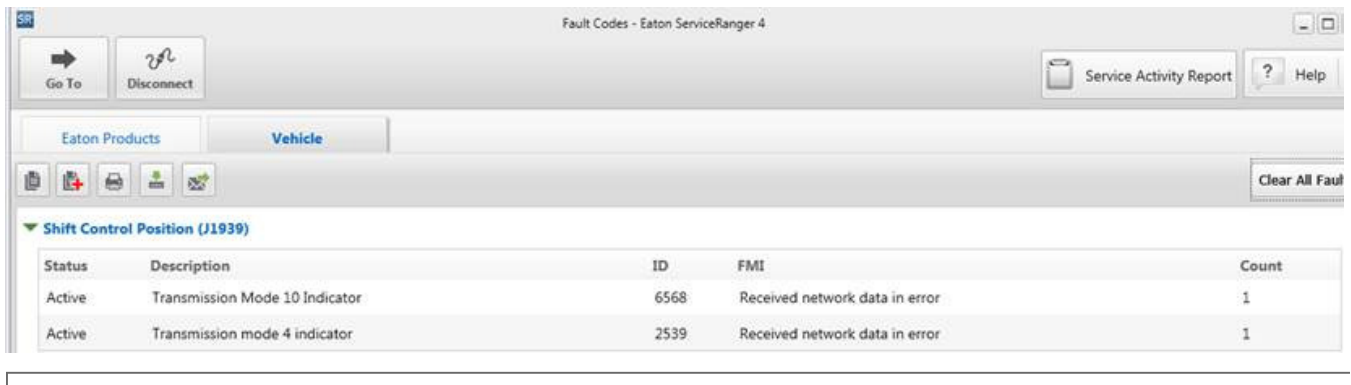

Status	Description	ID	FMI	Count
Active	Transmission Mode 10 Indicator	6568	Received network data in error	1
Active	Transmission mode 4 indicator	2539	Received network data in error	1

Access to PACCAR's Enterprise Portal is provided as a benefit of doing business with PACCAR. All applications and content accessed through this system are confidential and proprietary and the property of PACCAR Inc and its suppliers, and must be kept strictly confidential pursuant to the contract licensing such access. Disclosure, publication, release or distribution of any material found on PACCAR systems to any person other than employees with a need to know such information is strictly prohibited. All activity on this system is monitored. If PACCAR suspects or discovers any unauthorized activity, access may be immediately terminated without prior notification. Violators may be subject to legal action.

© Copyright 2017 PACCAR Inc. All rights reserved. We welcome your [feedback](#) on this page. For technical questions or concerns about this page, please contact the [DealerNet Webmaster](#).