



HYUNDAI Technical Service Bulletin

GROUP BODY ELECTRICAL	NUMBER 17-BE-018
DATE DECEMBER, 2017	MODEL(S) AZERA (HG)


SUBJECT: 15MY-16MY AZERA (HG) AVN 4.0 TEMPERATURE DISPLAY DEFECT

Description: This bulletin describes the procedure to determine if the vehicle's head unit needs to be replaced as a result of the temperature not displaying correctly on the screen.



SYMPTOM(S)

Temperature doesn't display correctly when over 100°F

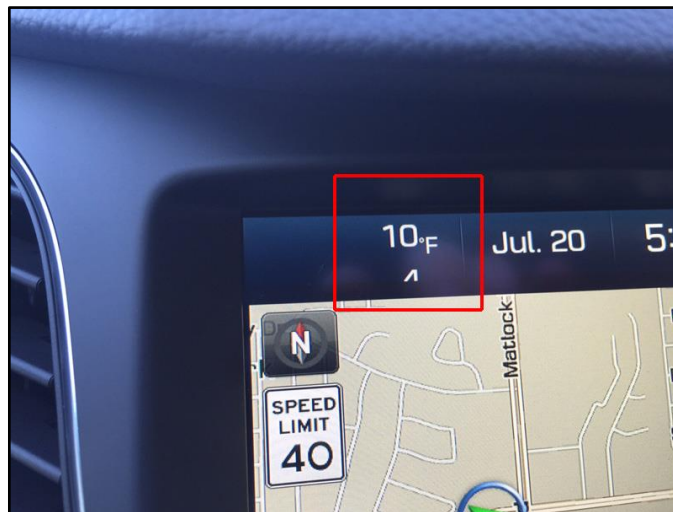

Applicable Vehicles: 15MY-16MY Azera (HG) equipped with AVN 4.0

Warranty Information: Normal Warranty applies where applicable.

Circulate To: General Manager, Service Manager, Parts Manager, Warranty Manager, Service Advisors, Technicians, Body Shop Manager, Fleet Repair


Diagnostic Diagram:

Start the vehicle by using the Start Stop Button (A).



Temperature doesn't display correctly when over 100°F

Confirm symptom(s)

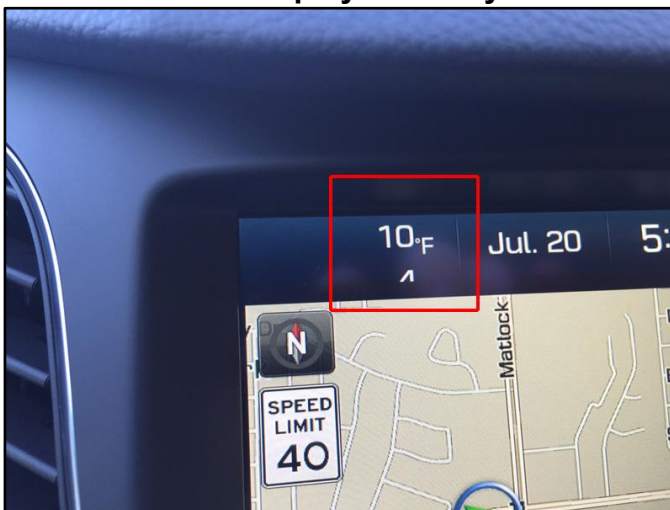

NOTICE

This can be confirmed by checking the HU software version. If the HU software version is below ST.HG.USA.E469.150810, then the vehicle is affected.

Action(s)

Replace the Head Unit or Perform a map update.