



## Technical Tip

<b>Topic</b>	01-17-07TT – 2018 Tiguan Long Wheel Base – No Vehicle Communication with Scan Tool Unable to Switch Vehicle Out of Transport Mode
<b>Market area</b>	United States 444 Volkswagen of America, Inc. (6444)
<b>Brand</b>	Volkswagen
<b>Date</b>	July 28, 2017

## Condition

**ATTENTION:**

**THIS IS A TECH TIP, NOT A TECHNICAL BULLETIN.**

**TECH TIPS ARE NOT ASSOCIATED WITH WARRANTY CLAIMING.**

### No Vehicle Communication with Scan Tool

Model(s)	Year	Eng. Code	Trans. Code	VIN Range From	VIN Range To
Tiguan LWB	2018	All	All	All	All

## Technical Background

No scan tool communication with vehicle concerns, inability to take out of transport mode.

## Service

To complete a vehicle scan on the 2018 Tiguan LWB correctly, ODIS must be at Product version 4.1.4 – Diagnostic Data didb 2.34.4 or later. You must then chose Model “BW – Tiguan 2018 USA/CAN” for the LWB Tiguan, in the model list. See Figure 1.

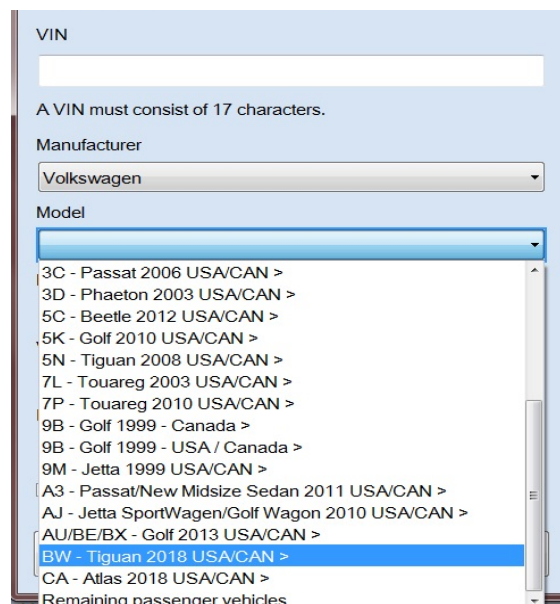


Figure 1



## Additional Information

<b>Revision History</b>		
<b>Revision Number</b>	<b>Released Date</b>	<b>Reason For Update</b>
2048511/1	7/27/17	Original Publication

© 2017 Volkswagen Group of America, Inc. All rights reserved. Information contained in this document is based on the latest information available at the time of printing and is subject to the copyright and other intellectual property rights of Volkswagen Group of America, Inc., its affiliated companies and its licensors. All rights are reserved to make changes at any time without notice. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, nor may these materials be modified or reposted to other sites, without the prior expressed written permission of the publisher.