

Subject

Tailgate Cable Stay Length Too Long - Verification Procedure

Market

USA

Service Category

Vehicle Exterior

Section

Exterior Panels/Trim

Applicability

MY14-18 Tundra


APPLICABLE VEHICLES

2014-2018

Tundra


CONDITION

Some customers may experience Tailgate Cable Stay slack appearance. Tailgate Cable Stays are designed to have some slack when the Tailgate does not have a load applied, this is due to Tailgate loading requirements.

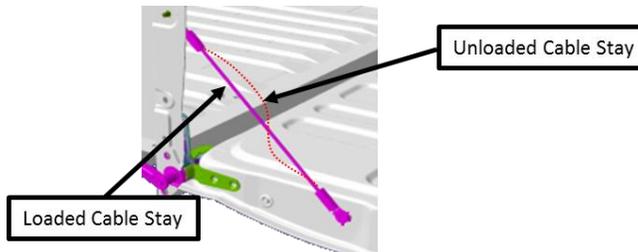

RECOMMENDATIONS

To confirm if Tailgate Cable Stay length is OK - load the Tailgate in the area shown (on the side with slack/loose condition) with load of ≥ 23 lbs. (use Seatbelt Sensor Weight SST 00002-09077-01).

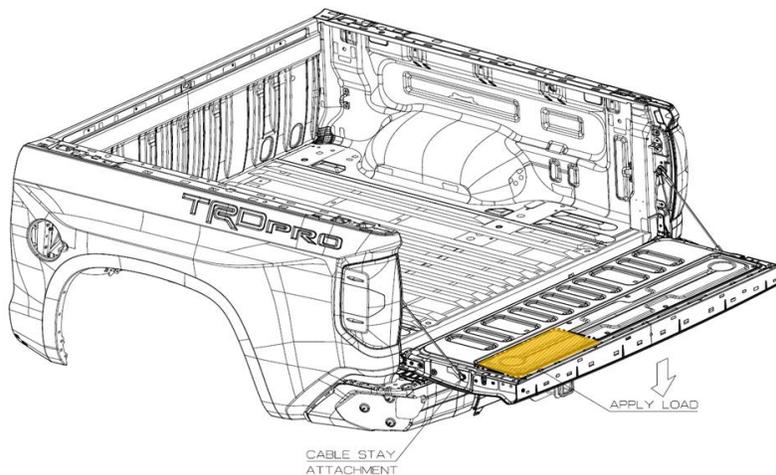

If Cable Stay has no slack/looseness, please inform customer part is OK and functions as intended.

Subject

Tailgate Cable Stay Length Too Long - Verification Procedure

Market

USA

Applicability

LINK REFERENCES

This Tech Tip does not contain any link references