



Service Bulletin

File in Section: -

Bulletin No.: 17-NA-076

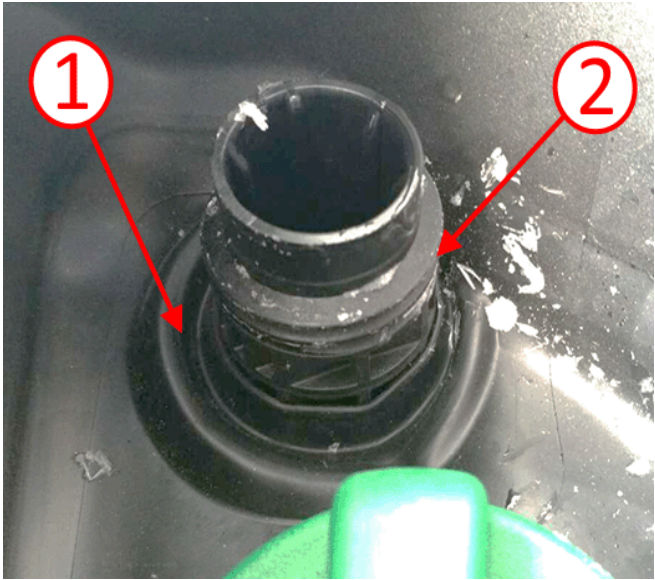
Date: November, 2017

INFORMATION

Subject: Information on Diesel Exhaust Fluid (DEF) Leaking Past Filler Cap

Brand:	Model:	Model Year:		VIN:		Engine:	Transmission:
		from	to	from	to		
Chevrolet	Colorado	2016	2018			LWN	
GMC	Canyon						

Involved Region or Country	North America
Condition	<p>Some customers may comment on one or more of the following conditions:</p> <ul style="list-style-type: none"> • DEF leaking at the filler pipe. • DEF filler cap doesn't install completely/properly.
Cause	<div style="text-align: center;"> </div> <p style="text-align: right; font-size: small;">4732593</p> <p>This condition may be caused by the grommet (1) in the fuel housing expanded around the DEF filler pipe cap threads (2).</p>

<p>Correction</p>	 <p style="text-align: right; margin-top: 10px;">4732670</p>
<p>Position the grommet (1) away from the DEF filler cap threads (2).</p>	

Parts Information

No parts are required for this repair.

Warranty Information

Labor Operation	Description	Labor Time
4081558*	Reposition DEF Filler Pipe Grommet	0.2 hr
*This is a unique Labor Operation for Bulletin use only.		

Version	2
Modified	Nov. 16, 2017 - Update Model Year to 2018.

