

Subject

Navigation Micro SD Card Error

Market

USA

Service Category

Audio/Visual/Telematics

Section

Navigation/Multi Info Display

Applicability

2016-17 Land Cruiser


APPLICABLE VEHICLES

2016-2017

Land Cruiser

CONDITION

Navigation microSD (mSD) card reads an error when missing or swapped from another vehicle.

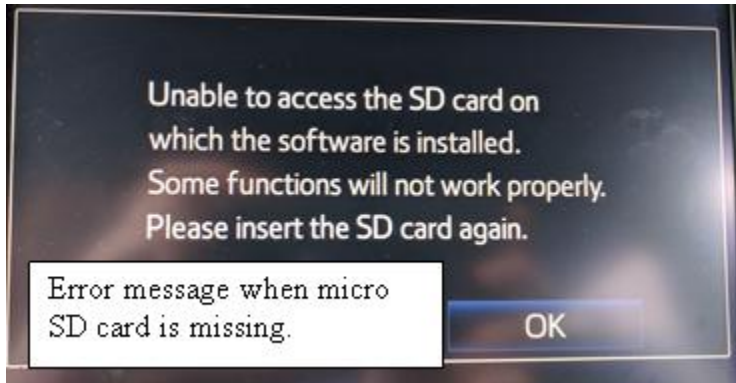

RECOMMENDATIONS

- Do not interchange mSD cards. Each mSD card is “paired” with the head unit.
- Once a mSD is “paired” with a vehicle, it may not be swapped into a different vehicle.
- A new mSD is “unpaired” and becomes “paired” when inserted into the vehicle.
- Service exchange radios come in “unpaired” service mode and accept used mSD cards.
- If a mSD card is swapped, returning it to the original vehicle will remedy the concern.

LINK REFERENCES

This Tech Tip does not contain any link references