

SAFETY COMPLIANCE TESTING FOR FMVSS No. 218 MOTORCYCLE HELMETS

Brand: HJC
Model: RPHA 90
Size: L (58-59 cm)

Prepared By

ACT Lab LLC
3280 East 59th Street,
Long Beach CA 90805
www.act-lab.com




30 January 2019


Final Report 218-ACT-19-014


Prepared For

U.S. Department of Transportation
National Highway Traffic Safety Administration
Office of Vehicle Safety Compliance (NEF-220)
1200 New Jersey Ave., S.E.
Washington, DC 20590

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Technician: 
Devon Dahm

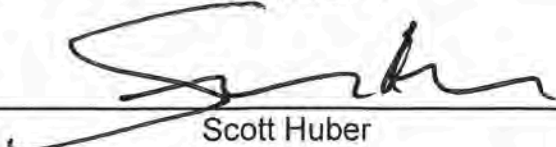Project Manager: 
Scott Huber

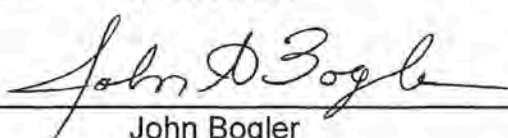Approved By: 
John Bogler

Approval Date: 30 January 2019

FINAL REPORT ACCEPTANCE BY OVSC

Accepted By: 

Acceptance Date: 05/02/2019

HS# 645994

TECHNICAL REPORT STANDARD TITLE PAGE

1. Report No. 218-ACT-19-014	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Sub-Title FINAL REPORT OF FMVSS NO. 218 COMPLIANCE TESTING OF HJC, MODEL RPHA 90, SIZE L (58-59 cm) MOTORCYCLE HELMET		5. Report Date 30 January 2019	
		6. Performing Organization Code ACT	
7. Author(s) Scott Huber, Program Manager		8. Performing Organization Report No. 52.1014.001	
9. Performing Organization Name and Address ACT Lab LLC 3280 East 59th Street, Long Beach CA 90805		10. Work Unit No.	
		11. Contract or Grant No. 693JJ918D000022	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Vehicle Safety Compliance (NEF-220) 1200 New Jersey Avenue, S.E. Washington, D.C. 20590		13. Type of Report and Period Covered Final Test Report	
		14. Sponsoring Agency Code NEF-220	
16. Abstract Compliance tests were conducted on the subject model motorcycle helmet in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-218-07. Test failures identified were as follows: S5.6.1 Labeling: The discrete size label does not appear to be permanent.			
17. Key Words Helmet Compliance Testing Safety Engineering FMVSS No. 218		18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services Division (NPO-120) 1200 New Jersey Avenue, S.E. Washington, D.C. 20590	
19. Security Classification (of this report) Unclassified	20. Security Classification (of this page) Unclassified	21. No. of Pages 46	22. Price

Form DOT F1700.7 (8-69)

TABLE OF CONTENTS

Section I	Purpose of Compliance Test
Section II	Compliance Test Data Summary
Section III	Test Data
Section IV	Test Failure Details
Appendix A	Interpretations or Deviations from FMVSS No. 218
Appendix B	Test Equipment and Calibration
Appendix C	Photographs

PURPOSE OF COMPLIANCE TEST

1. PURPOSE OF COMPLIANCE TEST

This testing was conducted as part of the Department of Transportation, National Highway Traffic Safety Administration's Federal Motor Vehicle Safety Standard (FMVSS) No. 218, "Motorcycle Helmets"¹ Compliance Program. The purpose of the test was to determine if the production helmets supplied by the Office of Vehicle Safety Compliance satisfy the requirements of TP-218-07², as governed by the contract.

2. TEST PROCEDURE

The ACT Lab Helmet Testing Manual, Part I – Motorcycle Helmets³ submitted to the Office of Vehicle Safety Compliance, National Highway Traffic Safety Administration, contains the specific procedures used to conduct this test. The ACT Lab Helmet Testing Manual, Part I – Motorcycle Helmets as modified by Project-Specific notations is in accordance with TP-218-07.

The test procedure shall not be in conflict with any portion of FMVSS No. 218 nor amendments in effect as noted in the applicable contract.

¹ NHTSA, FMVSS No. 218, Motorcycle Helmets, 49 CFR Chapter V Section 571.218, August 20, 1973 as last amended FR 28132 Vol. 76, No. 93, May 13, 2011.

² NHTSA, TP-218-07, Laboratory Test Procedure for FMVSS 218, Motorcycle Helmets, 13 May 2011.

³ ACT Lab Helmet Test Manual, Version 4.2 – Motorcycle Helmets in accordance with FMVSS No. 218, 22 July 2013.

HELMET DATA

HELMET BRAND NAME: HJC

HELMET MODEL DESIGNATION: RPHA 90

HELMET MANUFACTURER: HJC

HELMET SIZE: L (58-59 cm)

HELMET COVERAGE: Partial: Full: Complete: X

HELMET POSITIONING INDEX: 40 mm

SHELL MATERIAL: Fiberglass and Polyester Resin

LINER MATERIAL: Expanded Polystyrene

BUCKLE DESCRIPTION: Double D-Rings

HELMET	A Ambient	B Low Temp	C High Temp	D Water Immersed	E Spare
SHELL COLOR/PATTERN	Black	Black	Black	Black	Black
WEIGHT (grams)	1422	1413	1410	1391	1590
MONTH & YEAR OF MANUFACTURE	May 2018	May 2018	May 2018	May 2018	May 2018

COMMENTS:

1. All helmets were received in undamaged condition and were appropriate for testing.
2. Weights listed above for helmets A-D are as tested with face shield removed.
3. Weight for helmet E is complete with all components in place.
4. This is a complete coverage helmet with modular flip up chin bar.
5. NHTSA provided the HPI based on information obtained from the manufacturer.

SUMMARY OF TEST RESULTS

INDICATE Pass or Fail

HELMET	A	B	C	D
TEST	AMBIENT	LOW TEMP	HIGH TEMP	WATER IMMERSED
IMPACT	Pass	Pass	Pass	Pass
PENETRATION	Pass	Pass	Pass	Pass
RETENTION	Pass	Pass	Pass	Pass

INDICATE Pass or Fail

TEST	PASS/FAIL
PERIPHERAL VISION	Pass
LABELING	Fail

COMMENT:

1. S5.6.1 Labeling: The discrete size label does not appear to be permanent.

SELECTION OF APPROPRIATE HEADFORM

Paragraph S6.1 - If the helmet size designation falls into more than one of three size ranges, it shall be tested on each appropriate headform.

HELMET SIZE DESIGNATION	HEADFORM SIZE
Less than or equal to 6-3/4 (European Size 54)	SMALL
Greater than 6-3/4, but less than or equal to 7-1/2 (European Size 60)	MEDIUM
Greater than 7-1/2 (European 60)	LARGE

COMMENTS:

The manufacturer marked the helmet with its corresponding discrete size: L (58-59 cm),
Headform Size: DOT Medium.

CONDITIONING FOR TESTING — Paragraph S6.4 — The protective headgear shall be conditioned for not less than 4 hours and no more than 24 hours, in the specified environmental condition shown below, prior to test.

Ambient Conditions	16°C to 26°C (61°F to 79°F); 30% to 70% Relative Humidity
Low Temperature	-15°C to -5°C (5°F to 23°F)
High Temperature	45°C to 55°C (113°F to 131°F)
Water Immersion	16°C to 26°C (61°F to 79°F)

The maximum time during which the protective headgear may be out of the conditioning environment shall not exceed 4 minutes. It must then be returned to the conditioned environment for a minimum of 3 minutes for each minute or portion of a minute in excess of 4 minutes out of the conditioning environment or 12 hours, whichever is less, prior to resumption of testing.

AVERAGE LAB TEMPERATURE : 21.1 °C ; AVERAGE LAB HUMIDITY : 56.4 %

IMPACT ATTENUATION

SYSTEMS CHECK	TRIAL DROP	DROP (meters)	VEL. (m/s)	PEAK (g)	DWELL TIME (ms)		TEST RECORD	HEADFORM POSITION
					150 g	200 g		
PRETEST	1	1.3	4.93	416.2	2.4	2.1	Pre 1	Crown
	2	1.3	4.96	403.0	2.5	2.0	Pre 2	Crown
	3	1.3	4.92	407.3	2.4	2.0	Pre 3	Crown
PRETEST AVERAGE		XXXX	XXXX	409.0	XXX	XXX	XXXX	XXXX
POSTTEST	1	1.3	4.91	397.3	2.5	2.1	Post 1	Crown
	2	1.3	4.90	396.6	2.5	2.1	Post 2	Crown
	3	1.3	4.92	412.1	2.4	2.0	Post 3	Crown
POSTTEST AVERAGE		XXXX	XXXX	402.0	XXX	XXX	XXXX	XXXX
DIFFERENCE BETWEEN PRE-TEST AND POST-TEST AVERAGES				-7.0	DIFFERENCE NOT TO EXCEED 15 g			

Helmet Designation	Helmet Condition	Impact Location	Front		Left		Right		Rear	
		Impact Number	1	2	1	2	1	2	1	2
A	Ambient	Anvil	Hemi		Hemi		Flat		Flat	
		Test Record No.	1	2	3	4	5	6	7	8
		Peak g	81	151	101	134	181	180	165	170
		ms @ 150	0.0	0.1	0.0	0.0	1.4	2.4	1.0	2.3
		ms @ 200	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		Velocity m/s	5.24	5.25	5.50	5.18	6.01	6.02	6.02	6.05
B	Low Temperature	Anvil	Hemi		Hemi		Flat		Flat	
		Test Record No.	9	10	11	12	13	14	15	16
		Peak g	84	124	112	143	191	191	166	182
		ms @ 150	0.0	0.0	0.0	0.0	2.8	2.6	1.8	2.8
		ms @ 200	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		Velocity m/s	5.21	5.25	5.21	5.19	6.01	6.01	6.02	6.01
C	High Temperature	Anvil	Hemi		Hemi		Flat		Flat	
		Test Record No.	17	18	19	20	21	22	23	24
		Peak g	79	105	96	122	172	186	157	172
		ms @ 150	0.0	0.0	0.0	0.0	1.0	2.9	0.7	2.7
		ms @ 200	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		Velocity m/s	5.24	5.27	5.20	5.20	6.01	6.01	6.01	6.01
D	Water Immersed	Anvil	Hemi		Hemi		Flat		Flat	
		Test Record No.	25	26	27	28	29	30	31	32
		Peak g	74	94	98	117	178	182	160	161
		ms @ 150	0.0	0.0	0.0	0.0	2.3	2.3	0.6	2.0
		ms @ 200	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
		Velocity m/s	5.25	5.24	5.20	5.20	6.01	6.02	6.04	6.04

COMMENTS: 1. The actual drop heights were: flat anvil 193 cm, hemi anvil 145 cm.
2. Values reported in the above tables are rounded.

PENETRATION

Paragraph S5.2 and S7.2

WEIGHT OF STRIKER: 2.95 to 3.06 kg (6 pounds, 8 ounces to 6 pounds, 12 ounces)

POINT OF STRIKER: Radius = 0.5 ± 0.1 mm (0.02 ± 0.004 in.), included angle of $60^\circ \pm 0.5^\circ$, hardness minimum of 60 Rockwell "C" Scale and a cone height of not less than 3.8 ± 0.038 cm (1.5 ± 0.015 in.).

HEIGHT OF FALL: 300 cm \pm 1.5 cm, measured from the tip of the striker point to the outer surface of the mounted protective headgear.

FAILURE CRITERION: When tested, the protective headgear shall be failed if the penetrator has made an indentation in the headform.

TEST	HELMET	TEST LOCATION	PASS	FAIL	CONDITIONS
1	A	Crown	X		AMBIENT
2	A	Rear Right	X		AMBIENT
3	B	Crown	X		LOW TEMPERATURE
4	B	Rear Right	X		LOW TEMPERATURE
5	C	Crown	X		HIGH TEMPERATURE
6	C	Rear Right	X		HIGH TEMPERATURE
7	D	Crown	X		WATER IMMERSED
8	D	Rear Right	X		WATER IMMERSED

COMMENT: Photographs of penetration test locations are found in Appendix C.

RETENTION SYSTEM

Paragraph S5.3 and S7.3

REQUIREMENTS:

READING	APPLIED LOAD
INITIAL	22.68 kg, + 4.54 kg, - 0 kg (50.0 Lbs, + 10 Lbs, - 0 Lbs)
FINAL	136 kg, + 0 kg, - 2.3 kg (300.0 Lbs, + 0 Lbs, - 5 Lbs)

ELONGATION NOT TO EXCEED 2.5 cm (1.0 INCH) AFTER LOAD INCREASE

HELMET	CONDITIONS	INITIAL READING (cm)	FINAL READING (cm)	ELONGATION (cm)
A	AMBIENT	0.26	1.37	1.11
B	LOW TEMPERATURE	0.29	1.38	1.09
C	HIGH TEMPERATURE	0.24	1.38	1.14
D	WATER IMMERSED	0.26	1.50	1.24

CONFIGURATION - Paragraph S5.4 - Helmet shall provide a minimum peripheral vision of 105° to each side of the midsagittal plane. The brow opening shall be at least 2.54 cm (1 inch) above all points in the basic plane that are within the angles of peripheral vision.

	REQUIREMENTS	TEST RESULTS
PERIPHERAL VISION	> 105°	Pass
BROW OPENING	> 2.5 cm (1 inch)	Pass

COMMENT: Values in the above tables are rounded.

LABELING

S5.6.1 *Labeling* - Each helmet shall be permanently and legibly labeled, in a manner such that the label(s) can be easily read without removing padding or any other permanent part, with the following:

Required Information	Content/Format	Permanent
Manufacturer's name	Pass	Pass
Discrete size	Pass	Fail
Month and year of manufacture	Pass	Pass
Instructions to the purchaser as follows:	-----	-----
"Shell and liner constructed of (identify type(s) of materials)."	Pass	Pass
"Helmet can be seriously damaged by some common substances without damage being visible to the user."	Pass	Pass
"Apply only the following: (Recommended cleaning agents, paints, adhesives, etc., as appropriate.)"	Pass	Pass
"Make no modifications."	Pass	Pass
"Fasten helmet securely."	Pass	Pass
"If helmet experiences a severe blow, return it to the manufacturer for inspection, or destroy it and replace it."	Pass	Pass

COMMENT:

1. The discrete size does not appear to be permanent since it can be removed intact from the helmet leaving little or no trace on the helmet.

LABELING

S5.6.2 Certification. Each helmet shall be labeled permanently and legibly with a label, constituting the manufacturer's certification that the helmet conforms to the applicable Federal motor vehicle safety standards, that is separate from the label(s) used to comply with S5.6.1, and complies with paragraphs (a) through (c) of this section.


(a) Content, format, and appearance. The label required by paragraph S5.6.2 shall have the following content, format, and appearance:

Required Certification Information	Content/ Format	Permanent
The symbol "DOT," horizontally centered on the label, in letters not less than 0.38 inch (1.0 cm) high.	Pass	Pass
The term "FMVSS No. 218," horizontally centered beneath the symbol DOT, in letters not less than 0.09 inches (0.23 cm) high.	Pass	
The word "CERTIFIED," horizontally centered beneath the term "FMVSS No. 218," in letters not less than 0.09 inches (0.23 cm) high.	Pass	
The precise model designation horizontally centered above the symbol DOT, in letters and/or numerals not less than 0.09 inch (0.23 cm) high.	Pass	
The manufacturer's name and/or brand, horizontally centered above the model designation, in letters and/or numerals not less than 0.09 inch (0.23 cm) high.	Pass	
All symbols, letters and numerals shall be in a color that contrasts with the background of the label.	Pass	
No information, other than the information specified in subparagraph (a), shall appear on the label.	Pass	
The label shall appear on the outer surface of the helmet and be placed so that it is centered laterally with the horizontal centerline of the DOT symbol located a minimum of 1 inch (2.5 cm) and a maximum of 3 inches (7.6 cm) from the bottom edge of the posterior portion of the helmet.	Pass	

COMMENT:

- Labels were determined to be both easily read and permanent based on the TP-218-07, Section 12.5.4.

TEST DATA

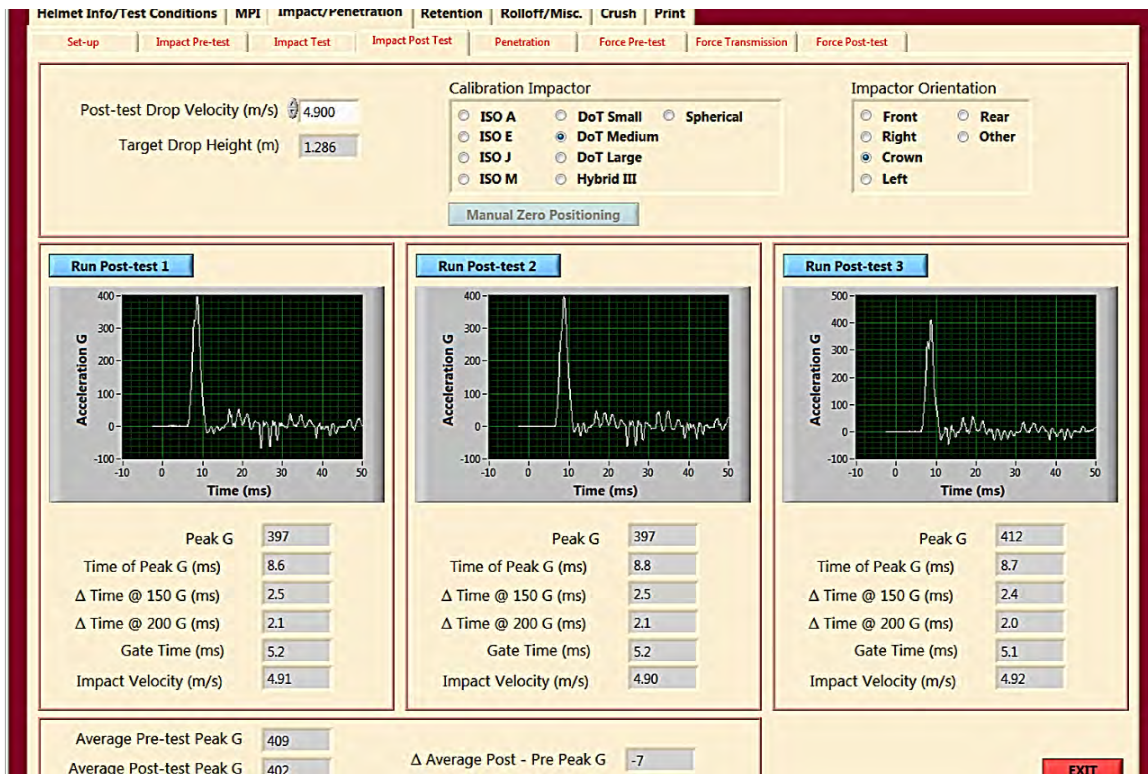

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☒ Front ☐ Rear

☐ Left ☐ Right

☐ Crown ☐ Other

Degrees-mm -

Anvil

☐ Flat ☐ Hazard

☒ Hemi ☐ Edge

☐ Curb ☐ Other

☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 81

Time of Peak (ms) 13.0

Δ Time @ 150 G (ms) 0.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.8

Impact Velocity (m/s) 5.24

Impact Energy (J) 69

HIC 354

SI 393

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: A Make: HJC S/N: 52.1014.001 Cond: Ambient

Manual Zero Positioning

Drop Site 1

Drop No. 1

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☒ Front ☐ Rear

☐ Left ☐ Right

☐ Crown ☐ Other

Degrees-mm -

Anvil

☐ Flat ☐ Hazard

☒ Hemi ☐ Edge

☐ Curb ☐ Other

☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 151

Time of Peak (ms) 16.0

Δ Time @ 150 G (ms) 0.1

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.8

Impact Velocity (m/s) 5.25

Impact Energy (J) 70

HIC 687

SI 833

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: A Make: HJC S/N: 52.1014.001 Cond: Ambient

Manual Zero Positioning

Drop Site 1

Drop No. 2

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☐ Front ☐ Rear
☒ Left ☐ Right
☐ Crown ☐ Other

Degrees-mm -

Anvil

☐ Flat ☐ Hazard
☒ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 101

Time of Peak (ms) 13.2

Δ Time @ 150 G (ms) 0.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.6

Impact Velocity (m/s) 5.50

Impact Energy (J) 76

HIC 561

SI 627

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: A Make: HJC S/N: 52.1014.001 Cond: Ambient

Manual Zero Positioning

Drop Site 2

Drop No. 1

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☐ Front ☐ Rear
☒ Left ☐ Right
☐ Crown ☐ Other

Degrees-mm -

Anvil

☐ Flat ☐ Hazard
☒ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 134

Time of Peak (ms) 12.2

Δ Time @ 150 G (ms) 0.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.9

Impact Velocity (m/s) 5.18

Impact Energy (J) 68

HIC 720

SI 834

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: A Make: HJC S/N: 52.1014.001 Cond: Ambient

Manual Zero Positioning

Drop Site 2

Drop No. 2

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 6.00

Energy (J) 91.0

Drop Height (m) 1.928

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☐ Front ☐ Rear
☐ Left ☒ Right
☐ Crown ☐ Other
 Degrees-mm -

Anvil

☒ Flat ☐ Hazard
☐ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder
 Anvil Definition Other

Impact Results

Peak G 181

Time of Peak (ms) 10.5

Δ Time @ 150 G (ms) 1.4

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.2

Impact Velocity (m/s) 6.01

Impact Energy (J) 91

HIC 1240

SI 1421

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: A Make: HJC S/N: 52.1014.001 Cond: Ambient

Manual Zero Positioning

Drop Site 3

Drop No. 1

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 6.00

Energy (J) 91.0

Drop Height (m) 1.928

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☐ Front ☐ Rear
☐ Left ☒ Right
☐ Crown ☐ Other
 Degrees-mm -

Anvil

☒ Flat ☐ Hazard
☐ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder
 Anvil Definition Other

Impact Results

Peak G 180

Time of Peak (ms) 10.1

Δ Time @ 150 G (ms) 2.4

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.2

Impact Velocity (m/s) 6.02

Impact Energy (J) 92

HIC 1244

SI 1457

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: A Make: HJC S/N: 52.1014.001 Cond: Ambient

Manual Zero Positioning

Drop Site 3

Drop No. 2

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | Impact/Penetration | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | Impact Test | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 6.00

Energy (J) 91.0

Drop Height (m) 1.928

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☐ Front ☒ Rear
☐ Left ☐ Right
☐ Crown ☐ Other

Degrees-mm -

Anvil

☒ Flat ☐ Hazard
☐ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 165

Time of Peak (ms) 9.2

Δ Time @ 150 G (ms) 1.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.2

Impact Velocity (m/s) 6.02

Impact Energy (J) 92

HIC 940

SI 1104

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status Complete

Select Helmet

ID: A Make: HJC S/N: 52.1014.001 Comd: Ambient

Manual Zero Positioning

Drop Site 4

Drop No. 1

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Set-up | Impact Pre-test | Impact Test | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 6.00

Energy (J) 91.0

Drop Height (m) 1.928

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☐ Front ☒ Rear
☐ Left ☐ Right
☐ Crown ☐ Other

Degrees-mm -

Anvil

☒ Flat ☐ Hazard
☐ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 170

Time of Peak (ms) 9.4

Δ Time @ 150 G (ms) 2.3

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.2

Impact Velocity (m/s) 6.05

Impact Energy (J) 93

HIC 1089

SI 1259

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status Complete

Select Helmet

ID: A Make: HJC S/N: 52.1014.001 Comd: Ambient

Manual Zero Positioning

Drop Site 4

Drop No. 2

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☒ Front ☐ Rear

☐ Left ☐ Right

☐ Crown ☐ Other

Degrees-mm -

Anvil

☐ Flat ☐ Hazard

☒ Hemi ☐ Edge

☐ Curb ☐ Other

☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 84

Time of Peak (ms) 12.4

Δ Time @ 150 G (ms) 0.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.9

Impact Velocity (m/s) 5.21

Impact Energy (J) 69

HIC 367

SI 411

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: B Make: HJC S/N: 52.1014.001 Cond: Cold

Manual Zero Positioning

Drop Site 1

Drop No. 1

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☒ Front ☐ Rear

☐ Left ☐ Right

☐ Crown ☐ Other

Degrees-mm -

Anvil

☐ Flat ☐ Hazard

☒ Hemi ☐ Edge

☐ Curb ☐ Other

☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 124

Time of Peak (ms) 15.2

Δ Time @ 150 G (ms) 0.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.8

Impact Velocity (m/s) 5.25

Impact Energy (J) 70

HIC 556

SI 656

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: B Make: HJC S/N: 52.1014.001 Cond: Cold

Manual Zero Positioning

Drop Site 1

Drop No. 2

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☐ Front ☐ Rear
☒ Left ☐ Right
☐ Crown ☐ Other
 Degrees-mm -

Anvil

☐ Flat ☐ Hazard
☒ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder
 Anvil Definition Other

Impact Results

Peak G 112

Time of Peak (ms) 11.5

Δ Time @ 150 G (ms) 0.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.9

Impact Velocity (m/s) 5.21

Impact Energy (J) 69

HIC 511

SI 586

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: B Make: HJC S/N: 52.1014.001 Cond: Cold

Manual Zero Positioning

Drop Site 2

Drop No. 1

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☐ Front ☐ Rear
☒ Left ☐ Right
☐ Crown ☐ Other
 Degrees-mm -

Anvil

☐ Flat ☐ Hazard
☒ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder
 Anvil Definition Other

Impact Results

Peak G 143

Time of Peak (ms) 11.7

Δ Time @ 150 G (ms) 0.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.9

Impact Velocity (m/s) 5.19

Impact Energy (J) 68

HIC 706

SI 814

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: B Make: HJC S/N: 52.1014.001 Cond: Cold

Manual Zero Positioning

Drop Site 2

Drop No. 2

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions		MPI	Impact/Penetration	Retention	Rolloff/Misc.	Crush	Print
Set-up		Impact Pre-test	Impact Test	Impact Post Test	Penetration	Force Pre-test	Force Transmission
Target Impact Specification Velocity (m/s) 6.00 Energy (J) 91.0 Drop Height (m) 1.928		Headform DOT C Drop Mass (kg) 5.055		Impact Site <input type="checkbox"/> Front <input type="checkbox"/> Rear <input type="checkbox"/> Left <input checked="" type="checkbox"/> Right <input type="checkbox"/> Crown <input type="checkbox"/> Other Degrees-mm -		Anvil <input checked="" type="radio"/> Flat <input type="radio"/> Hazard <input type="radio"/> Hemi <input type="radio"/> Edge <input type="radio"/> Curb <input type="radio"/> Other <input type="radio"/> Cylinder Anvil Definition Other	
Impact Results Peak G 191 Time of Peak (ms) 10.2 Δ Time @ 150 G (ms) 2.8 Δ Time @ 200 G (ms) 0.0 Gate Time (ms) 4.2 Impact Velocity (m/s) 6.01 Impact Energy (J) 91 HIC 1307 SI 1493 Rebound Gate Time (ms) 0.0 Rebound Velocity (m/s) Inf Coefficient of Restitution Inf Test Status Complete		Select Helmet ID: B Make: HJC S/N: 52.1014.001 Cond: Cold Manual Zero Positioning Drop Site 3 Drop No. 1 Run Test		<p>Acceleration G vs Time (ms) graph. The y-axis ranges from -10 to 400 G, and the x-axis ranges from -5 to 50 ms. A sharp peak is visible at approximately 10.2 ms, reaching an acceleration of about 191 G. The graph is labeled 'RSLT'.</p>			

Helmet Info/Test Conditions		MPI	Impact/Penetration	Retention	Rolloff/Misc.	Crush	Print
Set-up		Impact Pre-test	Impact Test	Impact Post Test	Penetration	Force Pre-test	Force Transmission
Target Impact Specification Velocity (m/s) 6.00 Energy (J) 91.0 Drop Height (m) 1.928		Headform DOT C Drop Mass (kg) 5.055		Impact Site <input type="checkbox"/> Front <input type="checkbox"/> Rear <input type="checkbox"/> Left <input checked="" type="checkbox"/> Right <input type="checkbox"/> Crown <input type="checkbox"/> Other Degrees-mm -		Anvil <input checked="" type="radio"/> Flat <input type="radio"/> Hazard <input type="radio"/> Hemi <input type="radio"/> Edge <input type="radio"/> Curb <input type="radio"/> Other <input type="radio"/> Cylinder Anvil Definition Other	
Impact Results Peak G 191 Time of Peak (ms) 10.0 Δ Time @ 150 G (ms) 2.6 Δ Time @ 200 G (ms) 0.0 Gate Time (ms) 4.2 Impact Velocity (m/s) 6.01 Impact Energy (J) 91 HIC 1389 SI 1581 Rebound Gate Time (ms) 0.0 Rebound Velocity (m/s) Inf Coefficient of Restitution Inf Test Status Complete		Select Helmet ID: B Make: HJC S/N: 52.1014.001 Cond: Cold Manual Zero Positioning Drop Site 3 Drop No. 2 Run Test		<p>Acceleration G vs Time (ms) graph. The y-axis ranges from -10 to 400 G, and the x-axis ranges from -5 to 50 ms. A sharp peak is visible at approximately 10.0 ms, reaching an acceleration of about 191 G. The graph is labeled 'RSLT'.</p>			

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 6.00

Energy (J) 91.0

Drop Height (m) 1.928

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☐ Front ☒ Rear
☐ Left ☐ Right
☐ Crown ☐ Other

Degrees-mm -

Anvil

☒ Flat ☐ Hazard
☐ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 166

Time of Peak (ms) 9.6

Δ Time @ 150 G (ms) 1.8

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.2

Impact Velocity (m/s) 6.02

Impact Energy (J) 92

HIC 1000

SI 1174

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: B Make: HJC S/N: 52.1014.001 Cond: Cold

Manual Zero Positioning

Drop Site 4

Drop No. 1

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 6.00

Energy (J) 91.0

Drop Height (m) 1.928

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☐ Front ☒ Rear
☐ Left ☐ Right
☐ Crown ☐ Other

Degrees-mm -

Anvil

☒ Flat ☐ Hazard
☐ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 182

Time of Peak (ms) 10.1

Δ Time @ 150 G (ms) 2.8

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.2

Impact Velocity (m/s) 6.01

Impact Energy (J) 91

HIC 1162

SI 1369

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: B Make: HJC S/N: 52.1014.001 Cond: Cold

Manual Zero Positioning

Drop Site 4

Drop No. 2

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☒ Front ☐ Rear

☐ Left ☐ Right

☐ Crown ☐ Other

Degrees-mm -

Anvil

☐ Flat ☐ Hazard

☒ Hemi ☐ Edge

☐ Curb ☐ Other

☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 79

Time of Peak (ms) 11.6

Δ Time @ 150 G (ms) 0.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.8

Impact Velocity (m/s) 5.24

Impact Energy (J) 69

HIC 315

SI 353

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: C Make: HJC S/N: 52.1014.001 Cond: Bot

Manual Zero Positioning

Drop Site 1

Drop No. 1

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☒ Front ☐ Rear

☐ Left ☐ Right

☐ Crown ☐ Other

Degrees-mm -

Anvil

☐ Flat ☐ Hazard

☒ Hemi ☐ Edge

☐ Curb ☐ Other

☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 105

Time of Peak (ms) 15.0

Δ Time @ 150 G (ms) 0.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.8

Impact Velocity (m/s) 5.27

Impact Energy (J) 70

HIC 489

SI 565

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: C Make: HJC S/N: 52.1014.001 Cond: Bot

Manual Zero Positioning

Drop Site 1

Drop No. 2

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Set-up

Impact Pre-test

Impact Test

Impact Post Test

Penetration

Force Pre-test

Force Transmission

Force Post-test

Target Impact Specification

Velocity (m/s)

5.20

Energy (J)

68.3

Drop Height (m)

1.448

Headform

DOT C

Drop Mass (kg)

5.055

Impact Site

☐ Front
☐ Rear

☒ Left
☐ Right

☐ Crown
☐ Other

Degrees-mm

-

Anvil

☐ Flat
☐ Hazard

☒ Hemi
☐ Edge

☐ Curb
☐ Other

☐ Cylinder

Anvil Definition

Other

Impact Results

Peak G

96

Time of Peak (ms)

10.0

Δ Time @ 150 G (ms)

0.0

Δ Time @ 200 G (ms)

0.0

Gate Time (ms)

4.9

Impact Velocity (m/s)

5.20

Impact Energy (J)

68

HIC

453

SI

504

Rebound Gate Time (ms)

0.0

Rebound Velocity (m/s)

Inf

Coefficient of Restitution

Inf

Test Status

Complete

Select Helmet

ID: C

Make: HJC

S/N: 52.1014.001

Cmd: Bot

Manual Zero Positioning

Drop Site

2

Drop No.

1

Run Test

Acceleration G

Time (ms)

50

Display Chan.

☒ RSLT
☐ X
☐ Y
☐ Z

EXIT

Helmet Info/Test Conditions

MPI

Impact/Penetration

Retention

Rolloff/Misc.

Crush

Print

Set-up

Impact Pre-test

Impact Test

Impact Post Test

Penetration

Force Pre-test

Force Transmission

Force Post-test

Target Impact Specification

Velocity (m/s)

5.20

Energy (J)

68.3

Drop Height (m)

1.448

Headform

DOT C

Drop Mass (kg)

5.055

Impact Site

☐ Front
☐ Rear

☒ Left
☐ Right

☐ Crown
☐ Other

Degrees-mm

-

Anvil

☐ Flat
☐ Hazard

☒ Hemi
☐ Edge

☐ Curb
☐ Other

☐ Cylinder

Anvil Definition

Other

Impact Results

Peak G

122

Time of Peak (ms)

12.3

Δ Time @ 150 G (ms)

0.0

Δ Time @ 200 G (ms)

0.0

Gate Time (ms)

4.9

Impact Velocity (m/s)

5.20

Impact Energy (J)

68

HIC

669

SI

764

Rebound Gate Time (ms)

0.0

Rebound Velocity (m/s)

Inf

Coefficient of Restitution

Inf

Test Status

Complete

Select Helmet

ID: C

Make: HJC

S/N: 52.1014.001

Cmd: Bot

Manual Zero Positioning

Drop Site

2

Drop No.

2

Run Test

Acceleration G



Time (ms)



50

Display Chan.

☒ RSLT
☐ X
☐ Y
☐ Z

EXIT

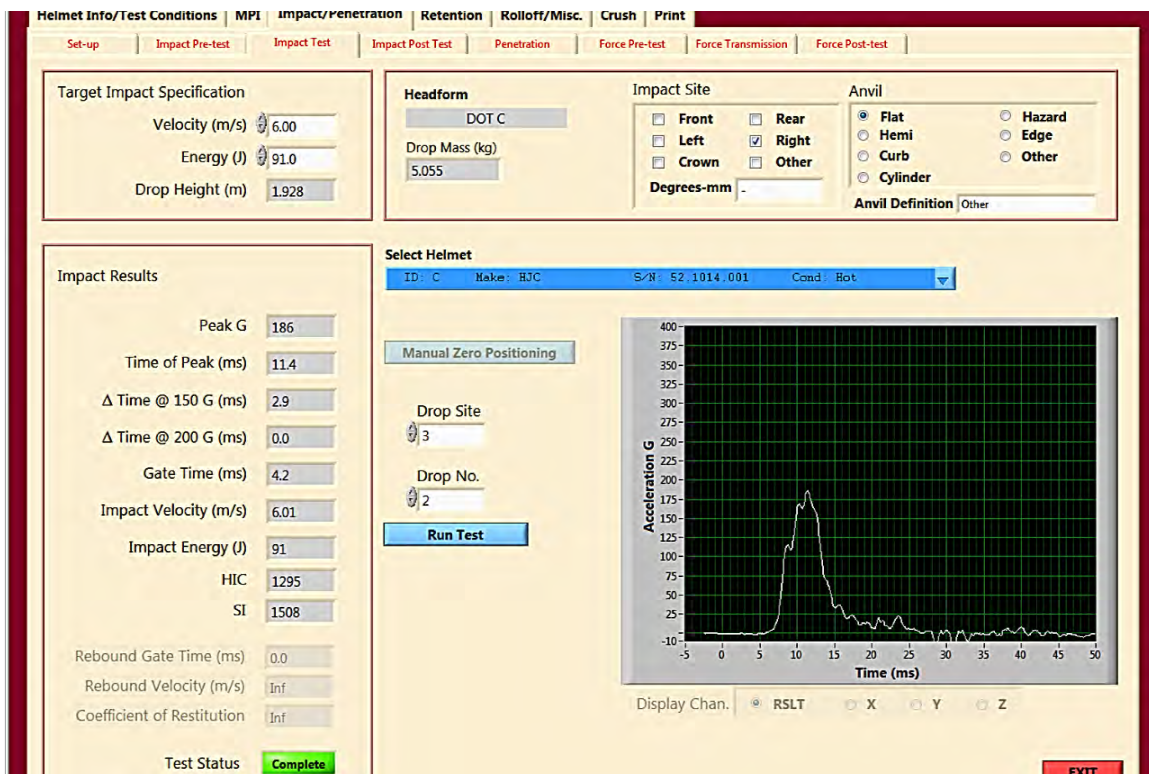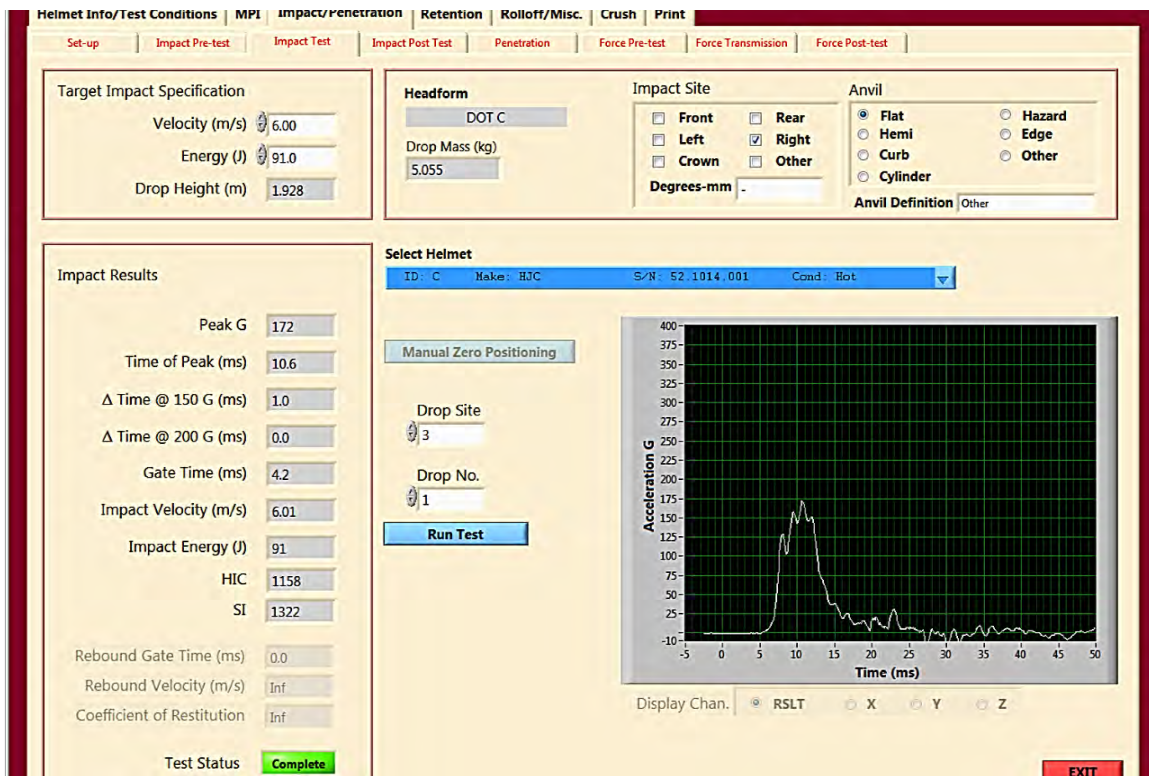

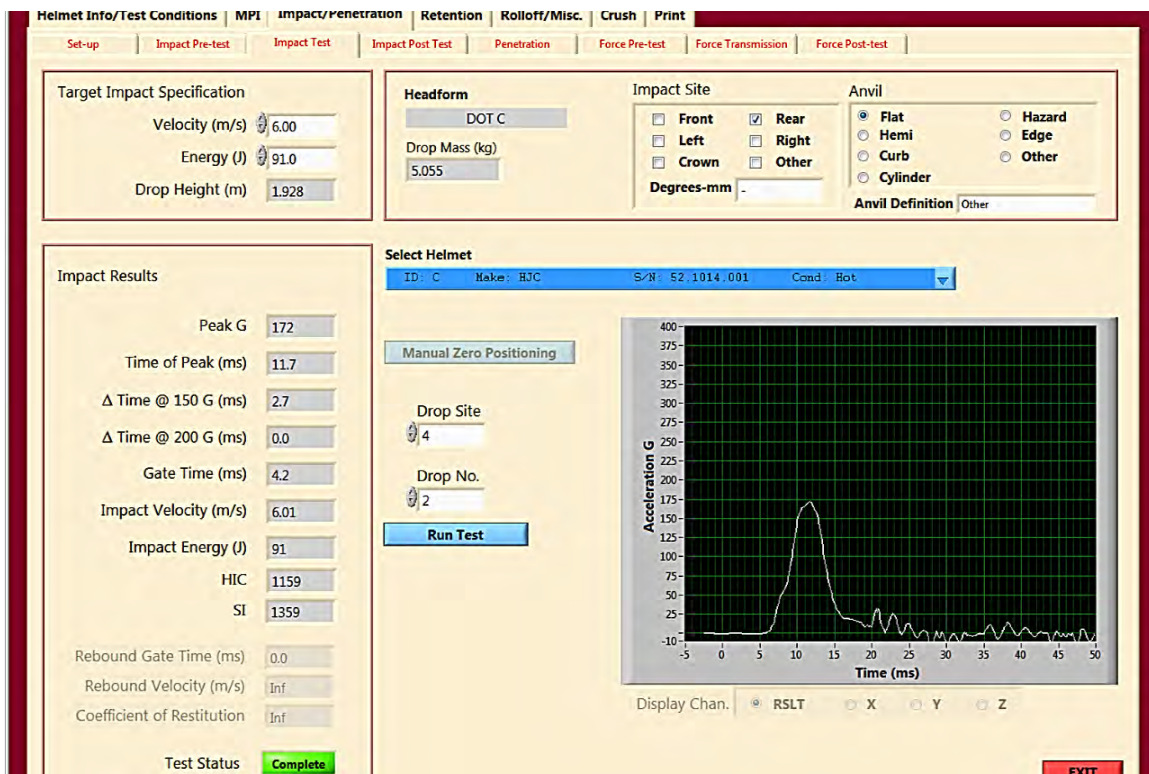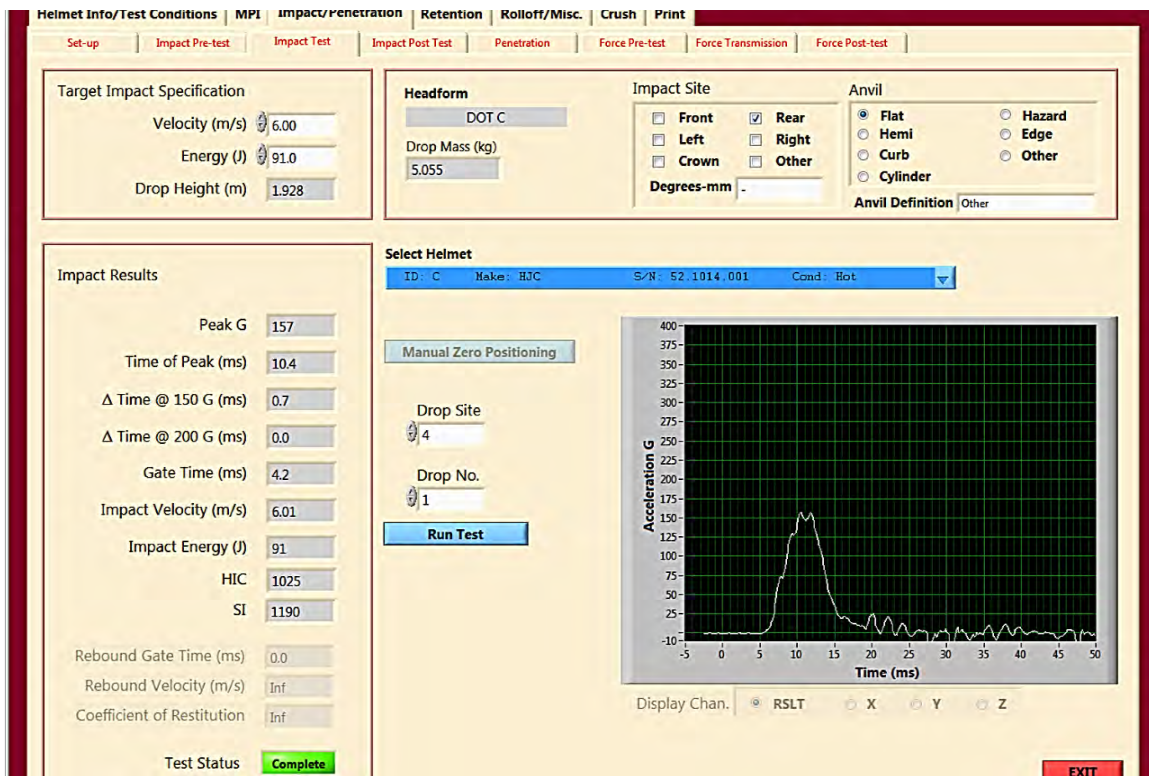

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☒ Front ☐ Rear

☐ Left ☐ Right

☐ Crown ☐ Other

Degrees-mm -

Anvil

☐ Flat ☐ Hazard

☒ Hemi ☐ Edge

☐ Curb ☐ Other

☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 74

Time of Peak (ms) 13.1

Δ Time @ 150 G (ms) 0.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.8

Impact Velocity (m/s) 5.25

Impact Energy (J) 70

HIC 293

SI 328

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: D Make: HJC S/N: 52.1014.001 Cond: Wet

Manual Zero Positioning

Drop Site 1

Drop No. 1

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☒ Front ☐ Rear

☐ Left ☐ Right

☐ Crown ☐ Other

Degrees-mm -

Anvil

☐ Flat ☐ Hazard

☒ Hemi ☐ Edge

☐ Curb ☐ Other

☐ Cylinder

Anvil Definition Other

Impact Results

Peak G 94

Time of Peak (ms) 15.0

Δ Time @ 150 G (ms) 0.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.8

Impact Velocity (m/s) 5.24

Impact Energy (J) 69

HIC 389

SI 456

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: D Make: HJC S/N: 52.1014.001 Cond: Wet

Manual Zero Positioning

Drop Site 1

Drop No. 2

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☐ Front ☐ Rear
☒ Left ☐ Right
☐ Crown ☐ Other
 Degrees-mm -

Anvil

☐ Flat ☐ Hazard
☒ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder
 Anvil Definition Other

Impact Results

Peak G 98

Time of Peak (ms) 10.1

Δ Time @ 150 G (ms) 0.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.9

Impact Velocity (m/s) 5.20

Impact Energy (J) 68

HIC 454

SI 507

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: D Make: HJC S/N: 52.1014.001 Cond: Wet

Manual Zero Positioning

Drop Site 2

Drop No. 1

Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification

Velocity (m/s) 5.20

Energy (J) 68.3

Drop Height (m) 1.448

Headform

DOT C

Drop Mass (kg) 5.055

Impact Site

☐ Front ☐ Rear
☒ Left ☐ Right
☐ Crown ☐ Other
 Degrees-mm -

Anvil

☐ Flat ☐ Hazard
☒ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder
 Anvil Definition Other

Impact Results

Peak G 117

Time of Peak (ms) 12.1

Δ Time @ 150 G (ms) 0.0

Δ Time @ 200 G (ms) 0.0

Gate Time (ms) 4.9

Impact Velocity (m/s) 5.20

Impact Energy (J) 68

HIC 570

SI 645

Rebound Gate Time (ms) 0.0

Rebound Velocity (m/s) Inf

Coefficient of Restitution Inf

Test Status **Complete**

Select Helmet

ID: D Make: HJC S/N: 52.1014.001 Cond: Wet

Manual Zero Positioning

Drop Site 2

Drop No. 2



Run Test

Acceleration G

Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

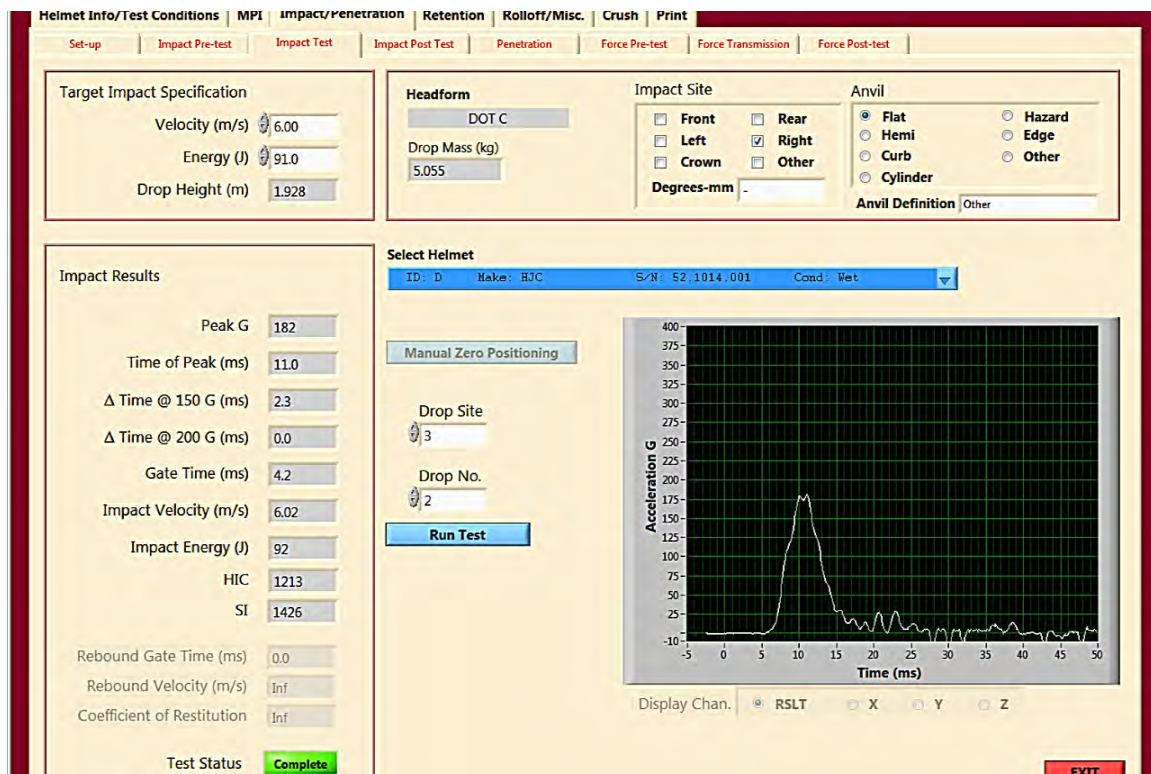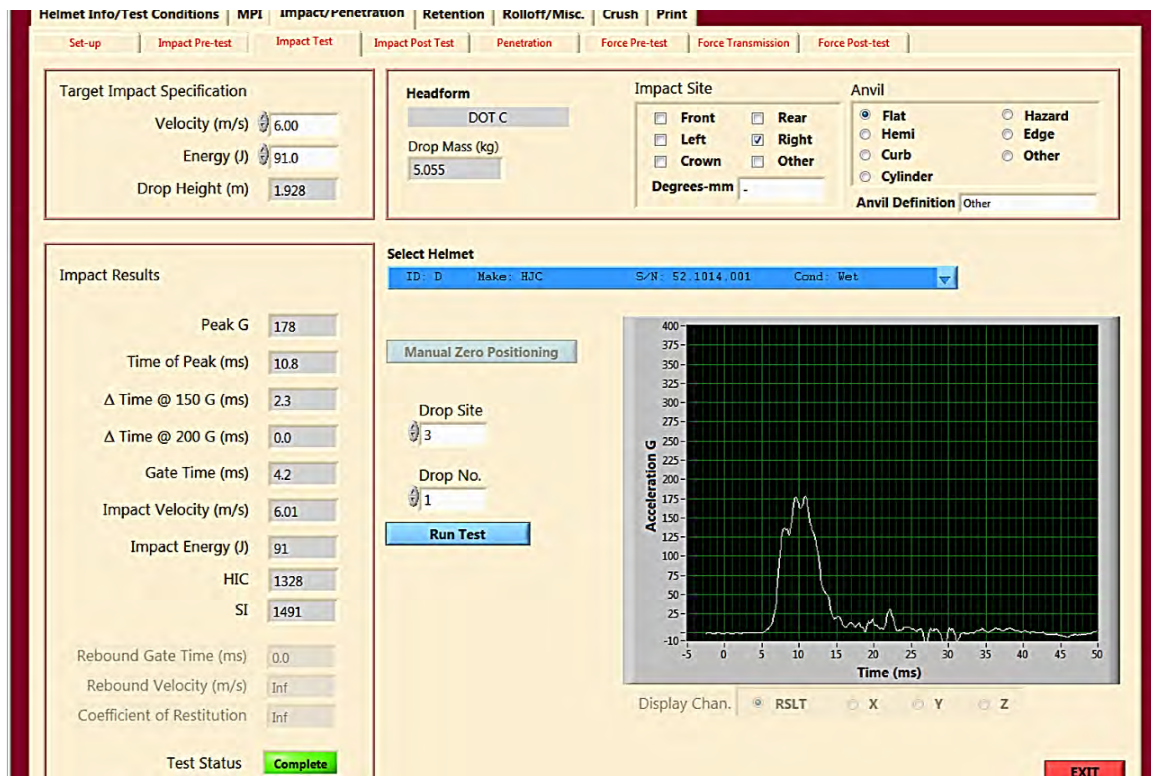

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification
 Velocity (m/s) 6.00
 Energy (J) 91.0
 Drop Height (m) 1.928

Headform
 DOT C
 Drop Mass (kg) 5.055

Impact Site
☐ Front ☒ Rear
☐ Left ☐ Right
☐ Crown ☐ Other
 Degrees-mm -

Anvil
☒ Flat ☐ Hazard
☐ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder
 Anvil Definition Other

Impact Results
 Peak G 160
 Time of Peak (ms) 10.7
 Δ Time @ 150 G (ms) 0.6
 Δ Time @ 200 G (ms) 0.0
 Gate Time (ms) 4.2
 Impact Velocity (m/s) 6.04
 Impact Energy (J) 92
 HIC 996
 SI 1153
 Rebound Gate Time (ms) 0.0
 Rebound Velocity (m/s) Inf
 Coefficient of Restitution Inf
 Test Status **Complete**

Select Helmet
 ID: D Make: HJC S/N: 52.1014.001 Cond: Wet
 Manual Zero Positioning
 Drop Site 4
 Drop No. 1
 Run Test

Acceleration G vs Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT

Helmet Info/Test Conditions | MPI | **Impact/Penetration** | Retention | Rolloff/Misc. | Crush | Print

Set-up | Impact Pre-test | **Impact Test** | Impact Post Test | Penetration | Force Pre-test | Force Transmission | Force Post-test

Target Impact Specification
 Velocity (m/s) 6.00
 Energy (J) 91.0
 Drop Height (m) 1.928

Headform
 DOT C
 Drop Mass (kg) 5.055

Impact Site
☐ Front ☒ Rear
☐ Left ☐ Right
☐ Crown ☐ Other
 Degrees-mm -

Anvil
☒ Flat ☐ Hazard
☐ Hemi ☐ Edge
☐ Curb ☐ Other
☐ Cylinder
 Anvil Definition Other

Impact Results
 Peak G 161
 Time of Peak (ms) 12.3
 Δ Time @ 150 G (ms) 2.0
 Δ Time @ 200 G (ms) 0.0
 Gate Time (ms) 4.2
 Impact Velocity (m/s) 6.04
 Impact Energy (J) 92
 HIC 1049
 SI 1224
 Rebound Gate Time (ms) 0.0
 Rebound Velocity (m/s) Inf
 Coefficient of Restitution Inf
 Test Status **Complete**


Select Helmet
 ID: D Make: HJC S/N: 52.1014.001 Cond: Wet
 Manual Zero Positioning
 Drop Site 4
 Drop No. 2
 Run Test

Acceleration G vs Time (ms)

Display Chan. ☒ RSLT ☐ X ☐ Y ☐ Z

EXIT


Last modified on 10/1/2017 at 4:36 PM
Printed on 1/30/2019 at 4:22 PM

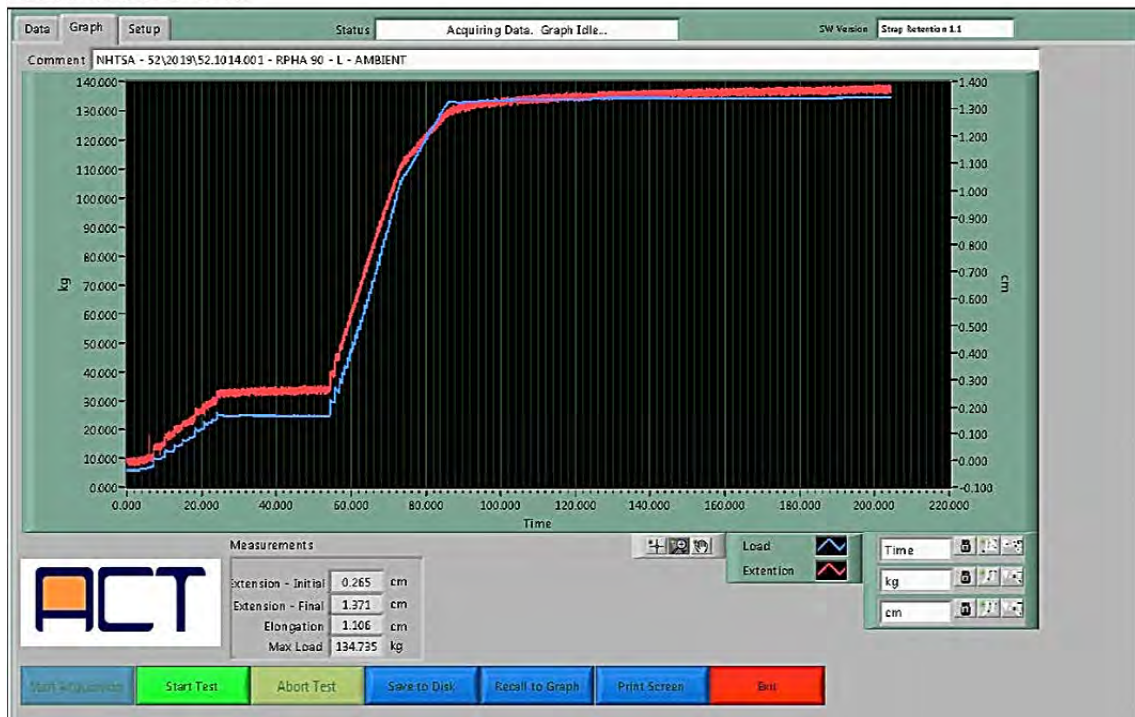


Last modified on 10/1/2017 at 4:36 PM
Printed on 1/30/2019 at 4:27 PM




Last modified on 10/1/2017 at 4:36 PM
Printed on 1/30/2019 at 4:36 PM

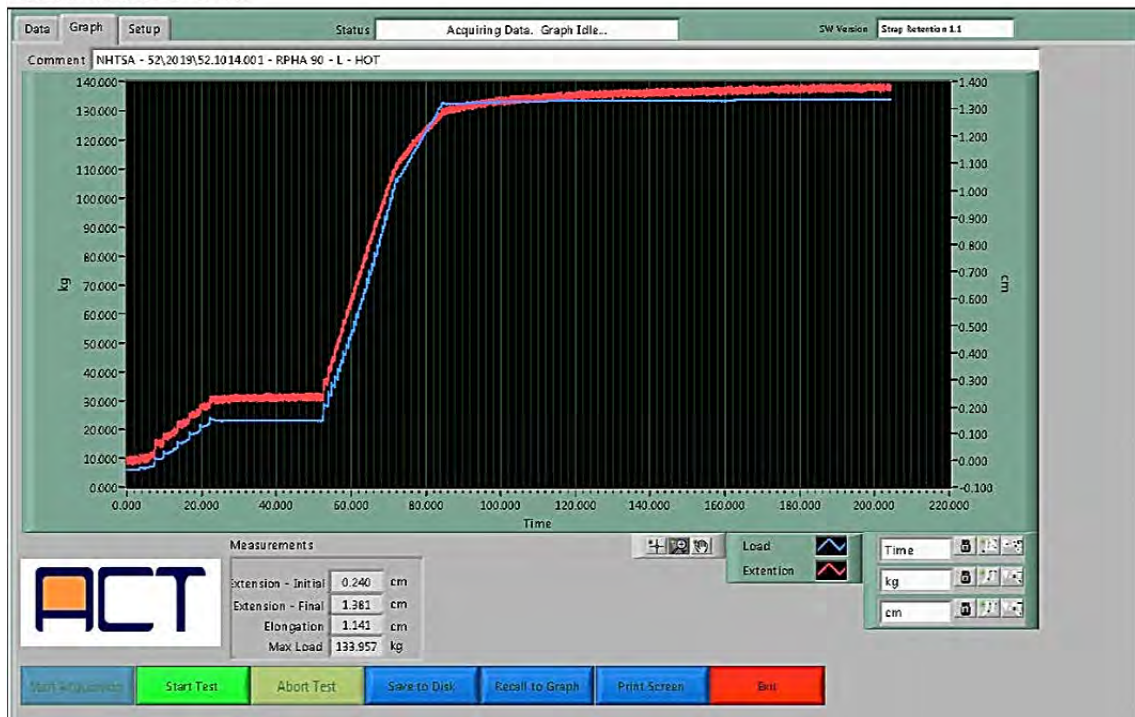

Last modified on 10/1/2017 at 4:36 PM
Printed on 1/30/2019 at 4:43 PM

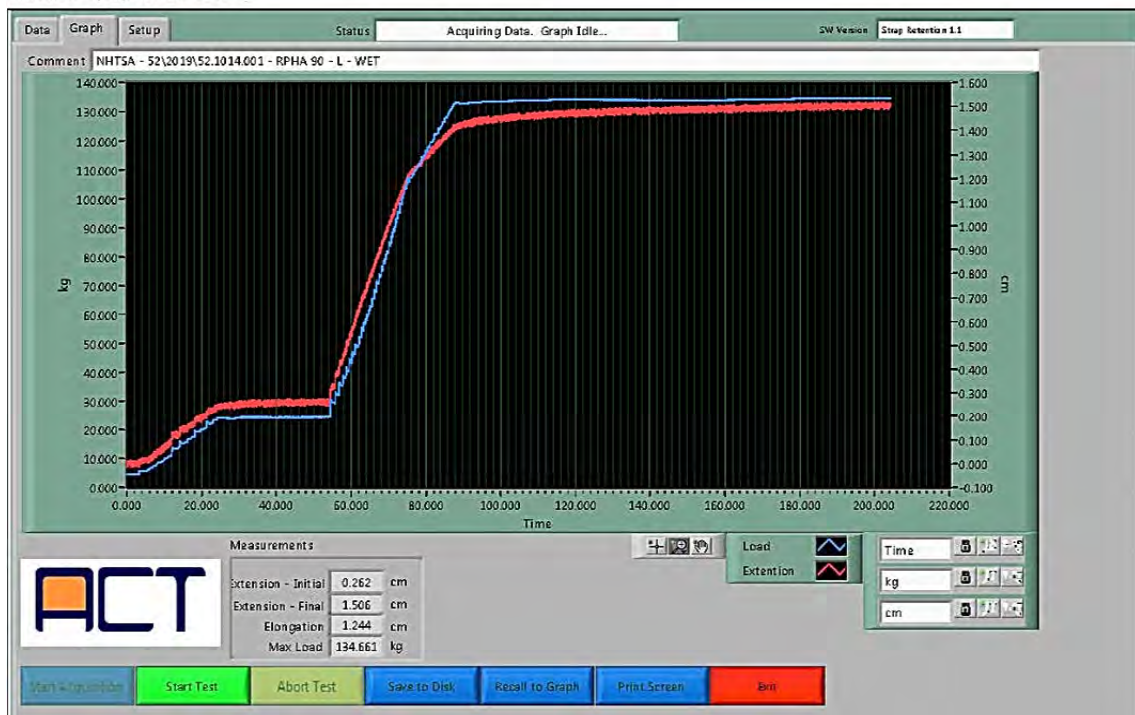

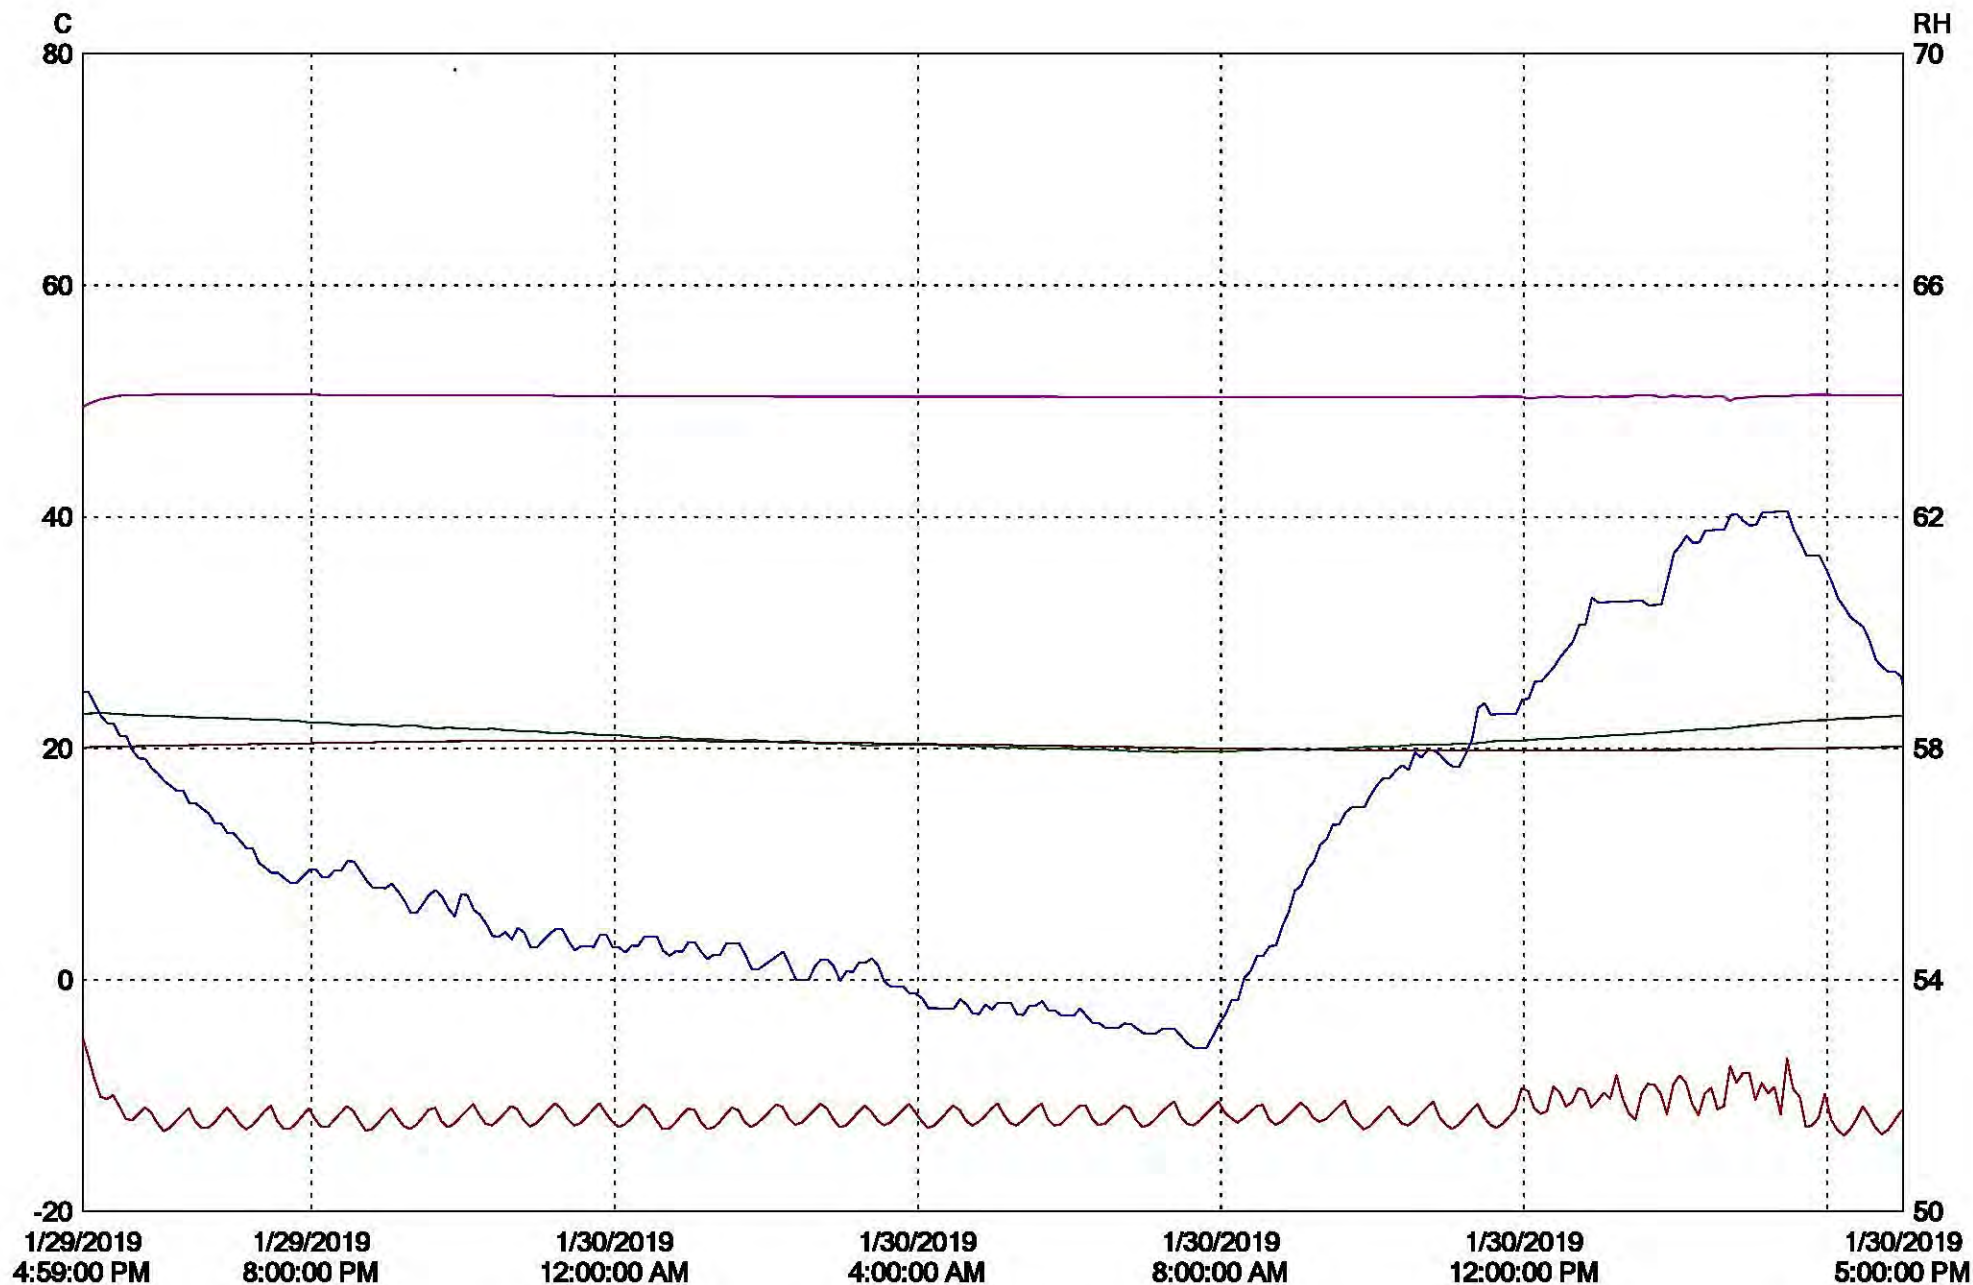

LN	Serial #	Description	CH	Value	Maximum	Average	Minimum	Units	CH description	Logger file
1	08071106	Freezer	1		-6.48	-11.51	-13.42	C	Freezer	Freezer-08071106-2019-01-30 17-05-36.spl
2	08052076	LAB TEMP/RH	1		23.04	21.10	19.68	C	Lab Temp.	LAB TEMP_RH-08052076-2019-01-30 17-05-31.spl
3	08052076	LAB TEMP/RH	2		62.1	56.4	52.8	RH	Humidity	LAB TEMP_RH-08052076-2019-01-30 17-05-31.spl
4	09021116	Oven/Water	1		50.57	50.40	49.68	C	Oven	Oven_Water-09021116-2019-01-30 17-05-39.spl
5	09021116	Oven/Water	2		20.66	20.21	19.80	C	Water	Oven_Water-09021116-2019-01-30 17-05-39.spl

APPENDIX A

INTERPRETATIONS OR DEVIATIONS FROM FMVSS No. 218

Excess water on the water immersed sample was allowed to drip off before testing to prevent water damage to test equipment.




APPENDIX B


EQUIPMENT LIST AND CALIBRATION SCHEDULES

Equipment List					
ACT ID	Description	Make/Model	S/N	Dimensional Check	Next
H0079	Monorail	US Testing	NA	12/8/2018	12/1/2019
H0138	Headform	Cadex DOT Small	7611	12/8/2018	12/1/2019
H0139	Headform	Cadex DOT Medium	7613	12/8/2018	12/1/2019
H0140	Headform	Cadex DOT Large	7616	12/8/2018	12/1/2019
H0028	Anvil	Hemispherical	C070911-01	12/8/2018	12/1/2019
H0029	Anvil	Flat	C310811-02	12/8/2018	12/1/2019
H0078	Anvil	MEP	16100801	12/8/2018	12/1/2019
H0088	Penetration Height Spacer	La Cienega Manufacturing	NA	12/8/2018	12/1/2019
H0064	Penetration Striker	Cadex	4324	12/8/2018	12/1/2019
H0089	Fixture - Peripheral Vision	---	NA	12/8/2018	12/1/2019
H0111	Peripheral Vision	1 inch Block	NA	12/8/2018	12/1/2019
H0059	Drop Carriage Assembly	Cadex	NA	12/8/2018	12/1/2019
H0117	DOT Penetration Headform - Small	Cadex	7293	12/8/2018	12/1/2019
H0118	DOT Penetration Headform - Medium	Cadex	7294	12/8/2018	12/1/2019
H0119	DOT Penetration Headform - Large	Cadex	7296	12/8/2018	12/1/2019
H0080	Penetrator Tube	La Cienega Manufacturing	NA	12/8/2018	12/1/2019
H0120	Penetration Headform Mount	Cadex	NA	NA	NA
H0082	Retention Strength Tester	La Cienega Manufacturing	NA	NA	NA
H0090	High Temperature Chamber	Thermolyne	116005-0891414	NA	NA
H0091	Low Temperature Chamber	Scientemp	S8001170	NA	NA
H0092	Water Immersion Container	Rubbermaid	NA	NA	NA
H0114	Laser Level	Ryobi	NA	NA	NA
H0115	Computer	Dell	67G5891	NA	NA
H0116	I-O Board	National Instruments	PCI-6023E	NA	NA

Calibrated Measurement Equipment								
ACT ID	Description	Make/Model	S/N	Range	Accuracy from Cal. Certs	Last Calibration	Next Calibration	Calibration By:
H0102	Velocity Gate	Biok-Gate 9304	9304-001	--	0.16 ms	12/1/2018	12/1/2019	ACT
H0097	Accelerometer/ Amplifier/Filter	2279/104/109	ANTP2/AK/A P23	2000 g	±2.60%	8/14/2018	8/14/2019	Precision Labs
H0114	Peripheral Vision protractor	D&K 125	NA	0-180 °	0.7 °	11/30/2017	11/30/2018	Micro Quality Calibration
H0098	LVDT - Retention	Schaevitz 2000-HR	16071	2 in	±0.06 mm	12/4/2018	12/4/2019	Micro Quality Calibration
H0099	Load Cell - Retention	LSB350	490706	500 lbs	±0.2%	12/4/2018	12/4/2019	Micro Quality Calibration
H0150	Ohaus Scale	V11P6	50921366	0-6000 gm	±1 g	10/12/2018	10/12/2019	Micro Quality Calibration
H0124	Digital Measuring Tape	Etape	-	16.5 ft	±0.0625 in	12/4/2018	12/4/2019	Micro Quality Calibration
H0105	Height Gage	Mitutoyo	3121016	12 in	±0.002 in	12/5/2018	12/5/2019	Micro Quality Calibration
H0106	Environmental Data Logger	Veriteq SP-2000-20R	8052076	-40 To +95C, 0-100% RH	±0.03 °C	8/14/2018	8/14/2019	Vaisala
H0107	Environmental Data Logger	Veriteq SP-1000-22N	8071106	-40 To +95 °C	±0.02 °C	8/14/2018	8/14/2019	Vaisala
H0108	Environmental Data Logger	Veriteq SP-1000-22N	9021116	-40 To +95 °C	±0.02 °C	8/14/2018	8/14/2019	Vaisala
H0130	Timer	Traceable 5017	181009252	0-99hrs/59 mins/59 sec	±0.01%	02/07/2018	02/07/2020	Control Company

APPENDIX C
PHOTOGRAPHS

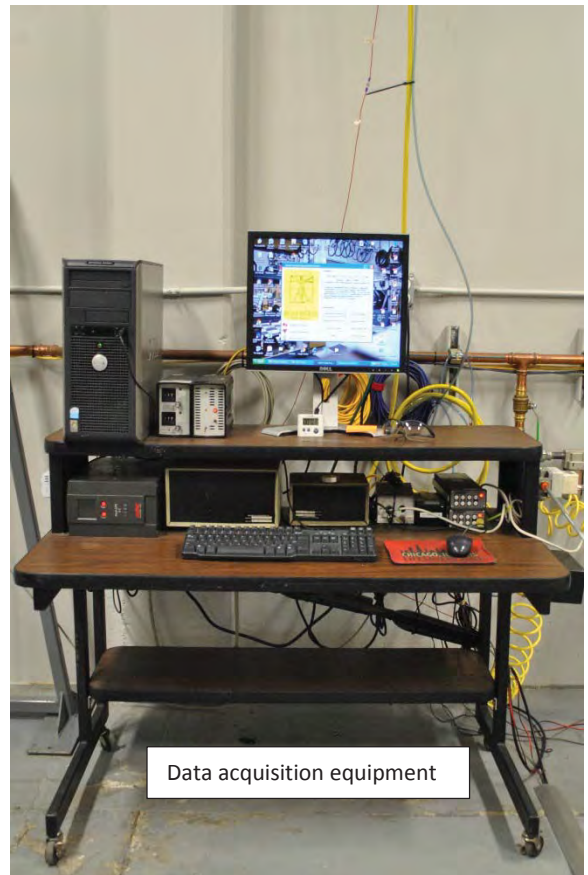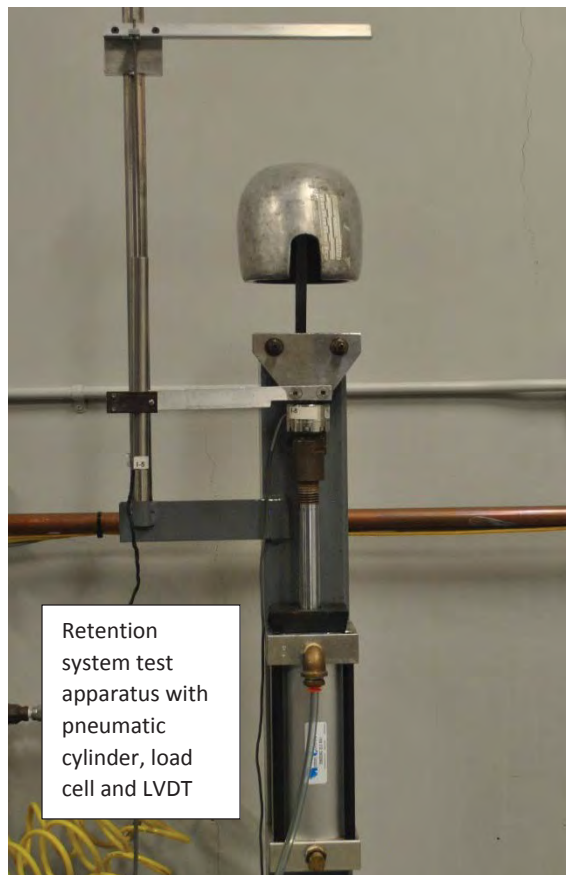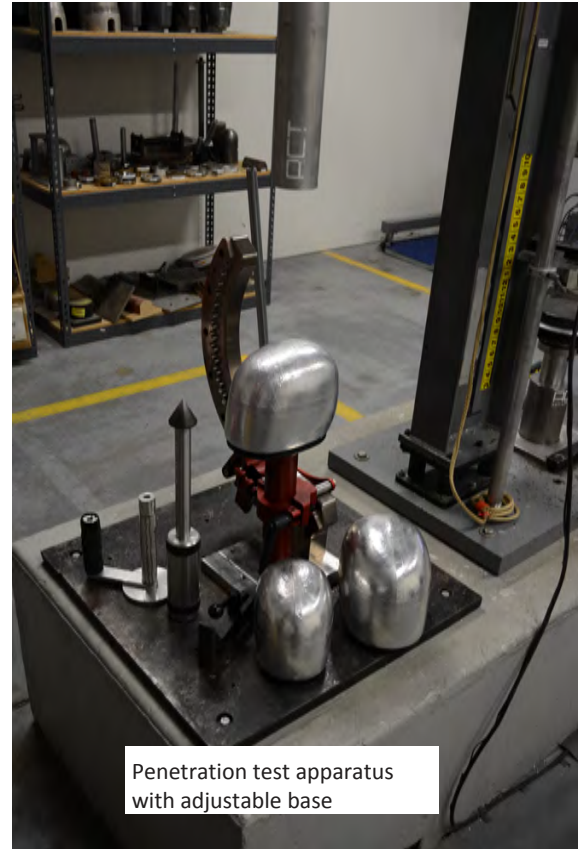

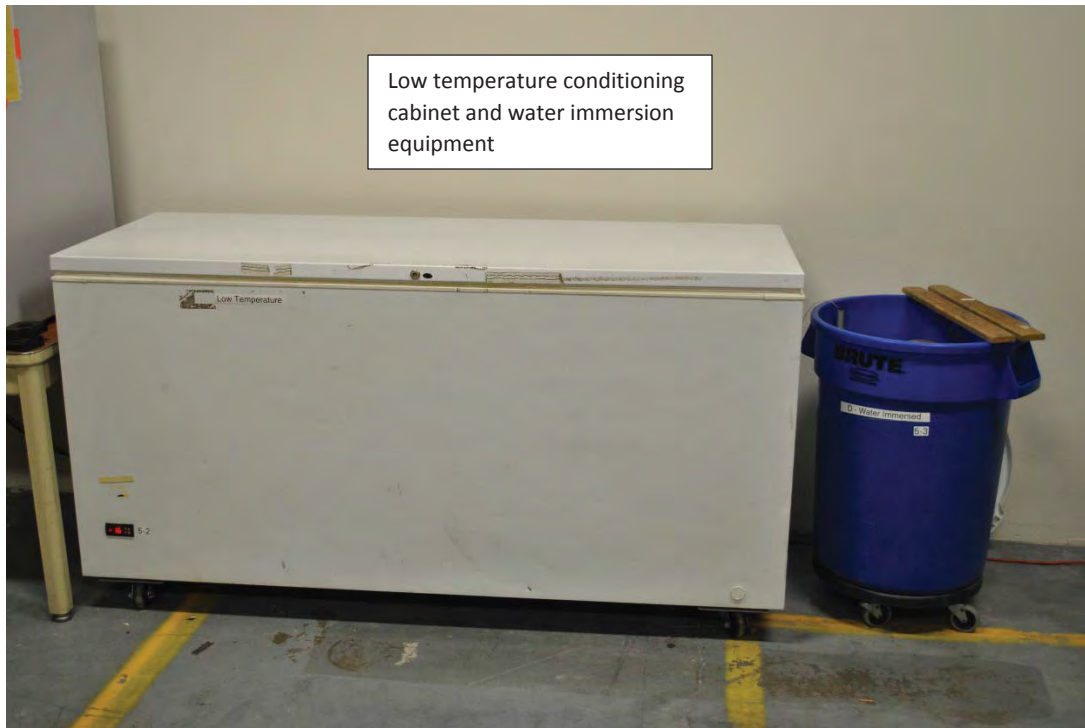

HJC RPHA 90 helmet and box showing model designation



HJC RPHA 90 helmet with test line, front left view



HJC RPHA 90 helmet with
test line, rear left view



HJC RPHA 90 helmet interior view



HJC RPHA 90 helmet front and left side hemispherical anvil impact locations



HJC RPHA 90 helmet right side and rear flat anvil impact locations




HJC RPHA 90 helmet
crown penetration test
location



HJC RPHA 90 helmet
rear right penetration
test location



HJC RPHA 90 helmet S5.6.1 Labeling

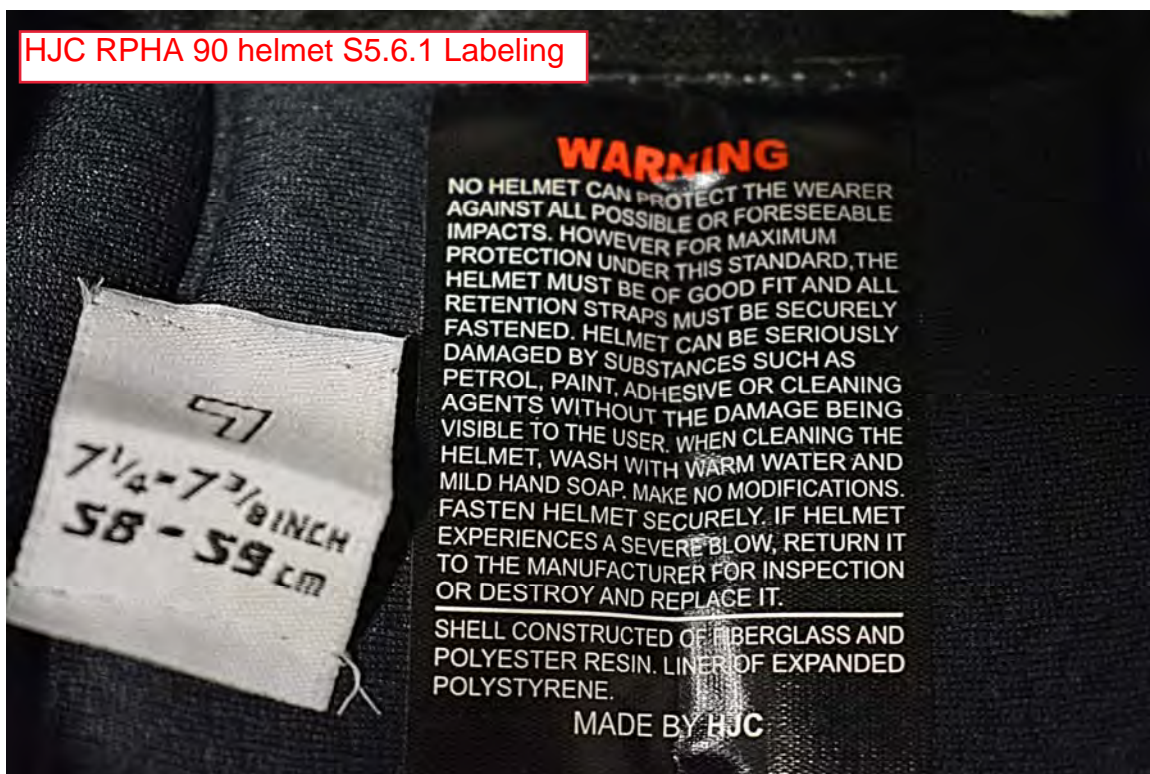

HJC RPHA 90 helmet S5.6.1 Labeling



HJC RPHA 90 helmet
S5.6.2 Certification Label



HJC RPHA 90 helmet with
comfort padding removed



HJC RPHA 90 helmet internal
labels, discrete size is missing

