Report No.
4919906-021

CHILD RESTRAINT SYSTEM COMPONENT TESTS FMVSS 213

Model No:
SnugRide SnugFit 35 DLX

SGS North America Inc.
Connectivity and Retail
291 Fairfield Avenue
Fairfield, NJ 07004

August 15, 2022

FINAL REPORT

213-SGS-22-021

PREPARED FOR

U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
ENFORCEMENT
OFFICE OF VEHICLE SAFETY COMPLIANCE
1200 NEW JERSEY AVE, SE (ROOM W45-304)
WASHINGTON, D.C. 20590

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s)and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Report No.: 4919906-021

Prepared by: SGS North America Inc.

Approved by: Frank Savino

Frank Savino

Date: August 15, 2022

Report Accepted by:

Contract Technical Manager, O.V.S.C.
Office of Vehicle Safety Compliance

Accepted By:

Kelley Adams-Campos

Acceptance Date:

KELLEY MARIA ADAMS-CAMPOS

Digitally signed by KELLEY MARIA ADAMS-CAMPOS
Date: 2022.08.16 10:22:29 -04'00'

HS# 647732

1. Report No. 213-SGS-22-021	2. Govt. Accession No.	3. Recipient's Catalog No.
4. Title and Sub-Title CHILD RESTRAINT SYSTEM, COMPONENT PARTS, Model No.: SnugRide SnugFit 35 DLX		5. Report Date: August 15, 2022
6. Performing Organization Code SGS-213-22-021		7. Author: Frank Savino, Project Manager
8. Performing Organization Report No. SGS-DOT-213-22-021		9. Performing Organization Name and Address: SGS North America Inc. 291 Fairfield Avenue Fairfield, NJ 07004
10. Work Unit No.		11. Order Number DTNH22-17-D-00079
12. Sponsoring Agency Name and Address: U.S. DEPARTMENT OF TRANSPORTATION NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION ENFORCEMENT OFFICE OF VEHICLE SAFETY COMPLIANCE 1200 NEW JERSEY AVE, SE (ROOM W45-304) WASHINGTON, D.C. 20590		13. Type of report and Period Covered FINAL TEST REPORT May 10 – July 30, 2022
14. Sponsoring Agency Code: NVS-220		15.

16. Abstract

THIS REPORT PRESENTS THE RESULTS OF TESTS PERFORMED IN ACCORDANCE WITH FEDERAL MOTOR VEHICLE SAFETY STANDARD NO. 213 ON CHILD RESTRAINT SYSTEM COMPONENT PARTS.

MODEL NUMBER: SnugRide SnugFit 35 DLX
ALL TESTS WERE SATISFACTORILY COMPLETED.

17. Key Words	18. Distribution Statement		
FMVSS No. 213 Child Restraint System Safety Engineering	Copies of this report are available from: National Highway Traffic Safety Administration Technical Information Services, Room 5111 (NPO-411) 1200 New Jersey Avenue, SE (Room E12-100) Washington, DC 20590 email: tis@nhtsa.dot.gov Telephone No. 202-493-2833		
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this Page) Unclassified	21. No. of Pages 45	22. Price

TABLE OF CONTENTS

Section 1. Purpose and Test Procedure

Section 2. Inspection Data and Test Data

Appendix A. Equipment List and Calibration Schedules

Appendix B. Interpretations or Deviations from FMVSS No. 213

Appendix C. Footnotes

Appendix D. Photographs of Equipment and Seat

SECTION 1

PURPOSE AND TEST PROCEDURES

PURPOSE AND TEST PROCEDURES

Purpose: The purpose of this report was to determine if the production child restraint components parts supplied by the National Highway Traffic Safety Administration met the requirements of Federal Motor Vehicle Safety Standard Number 213 - "Child Restraint System".

Test Procedures: The "SGS North America Inc. Laboratories Test Procedure for FMVSS No. 213" dated July 2012 submitted and approved by the office of Vehicle Safety Compliance National Highway Traffic Safety Administration contains the specific procedures used to conduct this test. This procedure shall not be interpreted to be in conflict with any portion of FMVSS No. 213 and amendments in effect as noted in the applicable order.

SECTION 2

INSPECTION DATA AND TEST DATA

INSPECTION AND TEST DATA
FMVSS NO. 213 - CHILD RESTRAINT SYSTEMS

Report No.: 4919906-021

Child Restraint System Identification

Manufacturer:

Name: Graco Children's Products, Inc.

Address: P.O. Box 169
Elverson, PA 19520-9901

Model: SnugRide SnugFit 35 DLX

Technicians: Charles Kehaya, Nik Kitov, John Roycraft

Project Manager: Frank Savino

WEBBING PERFORMANCE TESTS (S213-5.4.1)

Report No.: 4919906-021

Test Date: June 1, 2022

Laboratory Ambient Conditions During Testing

Temperature: 73 ° F

Relative Humidity: 50 %

Webbing Usage on Restraint: Harness

Test	Compliance Requirement	Test Result	Pass/Fail
Non-Degraded Webbing (FMVSS 213, S5.4.1.2(a)), (FMVSS 209, S5.1 (b))	New webbing breaking strength, 15,000 N (webbing used to secure CRS to vehicle) or 11,000 N (webbing used to secure child within CRS)	1. 13,478 2. 14,050 3. 14,151 Median: 14,050	Pass
Resistance to Abrasion (FMVSS 213, S5.4.1.2(b)(1)), (FMVSS 209, S5.1(d)) Abrasion Cycles Performed 2500 (2500 Required)	Median breaking strength, Newtons (75% of median baseline strength)	1. 13,848 2. 13,330 3. 13,792 Median: 13,792 Strength Retained: 98.2%	Pass
Resistance to Buckle Abrasion (FMVSS 213, S5.4.1.2(b)(1)), (FMVSS 209, S5.3(c)) Abrasion cycles Performed 2500 (2500 Required)	Median breaking strength, Newtons (75% of median baseline strength)	1. N/A 2. N/A 3. N/A Median: N/A	N/A[1]

WEBBING PERFORMANCE TESTS (S213-5.4.1) (Continued)

Report No.: 4919906-021

Test Date: June 1, 2022

Test	Compliance Requirement	Test Result	Pass/Fail
Resistance to Light (FMVSS 213, S5.4.1.2(c)(1)), (FMVSS 209 S5.1(e)) Exposure Time 100 Hr. (100 Hours Required)	Median breaking strength, Newtons (60% of median baseline strength)	1. 14,198 2. 13,865 3. 13,952 Median: 13,952 Strength Retained: 99.3%	Pass
	Color Retention >/= No. 2 on the Geometric Gray Scale	1. 5 2. 5 3. 5	Pass
Resistance to Micro-Organisms (FMVSS 213, S5.4.1.2(c)(2)), (FMVSS 209 S5.1(f))	Median breaking strength, Newtons (85% of median baseline strength)	1. N/A 2. N/A 3. N/A Median: N/A	N/A[2]
Width Requirement (FMVSS 213, S5.4.1.2(d), S5.4.1.3)	Width >/= 38 mm) If webbing contacts the test dummy torso	1. 39.0 2. 39.0 3. 39.0	Pass

Remarks: None

Technicians: Nik Kitov, John Roycraft

Project Manager: Frank Savino

WEBBING PERFORMANCE TESTS (S213-5.4.1)

Report No.: 4919906-021

Test Date: N/A

Laboratory Ambient Conditions During Testing

Temperature: 73 ° F

Relative Humidity: 50 %

Webbing Usage on Restraint: Adjuster

Test	Compliance Requirement	Test Result	Pass/Fail
Non-Degraded Webbing (FMVSS 213, S5.4.1.2(a)), (FMVSS 209, S5.1 (b))	New webbing breaking strength, 15,000 N (webbing used to secure CRS to vehicle) or 11,000 N (webbing used to secure child within CRS)	1. N/A 2. N/A 3. N/A Median: N/A	N/A[3]
Resistance to Abrasion (FMVSS 213, S5.4.1.2(b)(1)), (FMVSS 209, S5.1(d)) Abrasion Cycles Performed 2500 (2500 Required)	Median breaking strength, Newtons (75% of median baseline strength)	1. N/A 2. N/A 3. N/A Median: N/A Strength Retained: N/A	N/A[5]
Resistance to Buckle Abrasion (FMVSS 213, S5.4.1.2(b)(1)), (FMVSS 209, S5.3(c)) Abrasion cycles Performed 2500 (2500 Required)	Median breaking strength, Newtons (75% of median baseline strength)	1. N/A 2. N/A 3. N/A Median: N/A	N/A[1]

WEBBING PERFORMANCE TESTS (S213-5.4.1) (Continued)

Report No.: 4919906-021

Test Date: N/A

Test	Compliance Requirement	Test Result	Pass/Fail
Resistance to Light (FMVSS 213, S5.4.1.2(c)(1)), (FMVSS 209 S5.1(e)) Exposure Time 100 Hr. (100 Hours Required)	Median breaking strength, Newtons (60% of median baseline strength)	1. N/A 2. N/A 3. N/A Median: N/A	N/A[5]
	Color Retention >/= No. 2 on the Geometric Gray Scale	1. N/A 2. N/A 3. N/A	N/A[5]
Resistance to Micro-Organisms (FMVSS 213, S5.4.1.2(c)(2)), (FMVSS 209 S5.1(f))	Median breaking strength, Newtons (85% of median baseline strength)	1. N/A 2. N/A 3. N/A Median: N/A	N/A[2]
Width Requirement (FMVSS 213, S5.4.1.2(d), S5.4.1.3)	Width >/= 38 mm) If webbing contacts the test dummy torso	1. N/A 2. N/A 3. N/A	N/A

Remarks: None

Technicians: Nik Kitov, John Roycraft

Project Manager: Frank Savino

WEBBING PERFORMANCE TESTS (S213-5.4.1)

Report No.: 4919906-021

Test Date: June 1, 2022

Laboratory Ambient Conditions During Testing

Temperature: 73 ° F

Relative Humidity: 50 %

Webbing Usage on Restraint: Latch

Test	Compliance Requirement	Test Result	Pass/Fail
Non-Degraded Webbing (FMVSS 213, S5.4.1.2(a)), (FMVSS 209, S5.1 (b))	New webbing breaking strength, 15,000 N (webbing used to secure CRS to vehicle) or 11,000 N (webbing used to secure child within CRS)	1. 16,863 2. 17,190 3. 17,676 Median: 17,190	Pass
Resistance to Abrasion (FMVSS 213, S5.4.1.2(b)(1)), (FMVSS 209, S5.1(d)) Abrasion Cycles Performed 2500 (2500 Required)	Median breaking strength, Newtons (75% of median baseline strength)	1. 16,885 2. 16,814 3. 16,956 Median: 16,885 Strength Retained: 98.2%	Pass
Resistance to Buckle Abrasion (FMVSS 213, S5.4.1.2(b)(1)), (FMVSS 209, S5.3(c)) Abrasion cycles Performed 2500 (2500 Required)	Median breaking strength, Newtons (75% of median baseline strength)	1. N/A 2. N/A 3. N/A Median: N/A	N/A[1]

WEBBING PERFORMANCE TESTS (S213-5.4.1) (Continued)

Report No.: 4919906-021

Test Date: June 1, 2022

Test	Compliance Requirement	Test Result	Pass/Fail
Resistance to Light (FMVSS 213, S5.4.1.2(c)(1)), (FMVSS 209, S5.1(e)) Exposure Time 100 Hr. (100 Hours Required)	Median breaking strength, Newtons (60% of median baseline strength)	1. 17,393 2. 16,947 3. 16,785 Median: 16,947 Strength Retained: 98.6%	Pass
	Color Retention >/= No. 2 on the Geometric Gray Scale	1. 5 2. 5 3. 5	Pass
Resistance to Micro-Organisms (FMVSS 213, S5.4.1.2(c)(2)), (FMVSS 209, S5.1(f))	Median breaking strength, Newtons (85% of median baseline strength)	1. N/A 2. N/A 3. N/A Median: N/A	N/A[2]
Width Requirement (FMVSS 213, S5.4.1.2(d), S5.4.1.3)	Width >/= 38 mm) If webbing contacts the test dummy torso	1. 39.0 2. 39.0 3. 39.0	N/A

Remarks: None

Technicians: Nik Kitov, John Roycraft

Project Manager: Frank Savino

WEBBING PERFORMANCE TESTS (S213-5.4.1)

Report No.: 4919906-021

Test Date: N/A

Laboratory Ambient Conditions During Testing

Temperature: 73 ° F

Relative Humidity: 50 %

Webbing Usage on Restraint: Tether

Test	Compliance Requirement	Test Result	Pass/Fail
Non-Degraded Webbing (FMVSS 213, S5.4.1.2(a)), (FMVSS 209, S5.1 (b))	New webbing breaking strength, 15,000 N (webbing used to secure CRS to vehicle) or 11,000 N (webbing used to secure child within CRS)	1. N/A 2. N/A 3. N/A Median: N/A	N/A[4]
Resistance to Abrasion (FMVSS 213, S5.4.1.2(b)(1)), (FMVSS 209, S5.1(d)) Abrasion Cycles Performed 2500 (2500 Required)	Median breaking strength, Newtons (75% of median baseline strength)	1. N/A 2. N/A 3. N/A Median: N/A Strength Retained: N/A	N/A[4]
Resistance to Buckle Abrasion (FMVSS 213, S5.4.1.2(b)(1)), (FMVSS 209, S5.3(c)) Abrasion cycles Performed 2500 (2500 Required)	Median breaking strength, Newtons (75% of median baseline strength)	1. N/A 2. N/A 3. N/A Median: N/A	N/A[4]

WEBBING PERFORMANCE TESTS (S213-5.4.1) (Continued)

Report No.: 4919906-021

Test Date: N/A

Test	Compliance Requirement	Test Result	Pass/Fail
Resistance to Light (FMVSS 213, S5.4.1.2(c)(1)), (FMVSS 209, S5.1(e)) Exposure Time 100 Hr. (100 Hours Required)	Median breaking strength, Newtons (60% of median baseline strength)	1. N/A 2. N/A 3. N/A Median: N/A Strength Retained: N/A	N/A[4]
	Color Retention >/= No. 2 on the Geometric Gray Scale	1. N/A 2. N/A 3. N/A	N/A[4]
Resistance to Micro-Organisms (FMVSS 213, S5.4.1.2(c)(2)), (FMVSS 209, S5.1(f))	Median breaking strength, Newtons (85% of median baseline strength)	1. N/A 2. N/A 3. N/A Median: N/A	N/A[4]
Width Requirement (FMVSS 213, S5.4.1.2(d), S5.4.1.3)	Width >/= 38 mm) If webbing contacts the test dummy torso	1. N/A 2. N/A 3. N/A	N/A

Remarks: None

Technicians: Nik Kitov, John Roycraft

Project Manager: Frank Savino

BELT BUCKLE AND ADJUSTMENT HARDWARE
PERFORMANCE TESTS (S213-S5.4.2/S209-S4.3)

Report No.: 4919906-021

Test Date: July 30, 2022 **Item Code:** SnugRide SnugFit 35 DLX

Laboratory Ambient Conditions During Testing

Temperature: 73 °F

Relative Humidity: 50 %

Test	Compliance Requirement	Test Result	Pass/Fail
Corrosion Resistance (FMVSS 213, S5.4.2), (FMVSS 209, S4.3.(a)) Exposure Time 24 Hours (24 Hours Required) Drying Time 1 Hour (1 Hour Required)	No Corrosion (NC)	1. NC 2. NC 3. NC	Pass Pass Pass
Push Buttons (FMVSS 213, S5.4.3.5 (c)), (FMVSS 209 S4.3(d)(2))	Area ≥ 0.6 sq. in.)	0.67	Pass
	Dimensions, mm (inches)	21.5 x 20.0 mm (0.85 x 0.79 inches) Rectangular	N/A
	Minimum Linear Dimension >=10mm (0.39 inches)	20.0 mm (0.79 inches)	Pass
Lever Release	Cylinder Insertion	N/A	N/A[4]
Other	Two-finger Access	N/A	N/A[4]

BELT BUCKLE AND ADJUSTMENT HARDWARE
PERFORMANCE TESTS (S213-S5.4.2/S209-S4.3) (Continued)

Report No.: 4919906-021

Test	Compliance Requirement	Test Result	Pass/Fail
Buckle Latch (FMVSS 213, S5.4.3.5(d)), (FMVSS 209, S4.3(g)) Follows Corrosion Resistance Cycles 200 (200 Required)	No Functional Deterioration (NFD)	1. NFD 2. NFD 3. NFD	1. Pass 2. Pass 3. Pass

Buckle Latch (FMVSS 213, S5.4.3.5(d)), (FMVSS 209, S4.3(g)) Corrosion Resistance metal to metal buckles Note: Cycle Button; Perform manual latching and unlatching prior to partial engagement test.	Partial Engagement Separation Force <5 lb.	Test Result As Received		Test Result After Corrosion Resistance	
		Front	Inverted	Front	Inverted
		Sample 1 1) P 2) P 3) P	Sample 1 1) P 2) P 3) P	Sample 1 1) P 2) P 3) P	Sample 1 1) P 2) P 3) P
		Sample 2 1) P 2) P 3) P	Sample 2 1) P 2) P 3) P	Sample 2 1) P 2) P 3) P	Sample 2 1) P 2) P 3) P
		Sample 3 1) P 2) P 3) P	Sample 3 1) P 2) P 3) P	Sample 3 1) P 2) P 3) P	Sample 3 1) P 2) P 3) P

Remarks: P = Pass

Technicians: Charles Kehaya
Project Manager: Frank Savino

BELT BUCKLE AND ADJUSTMENT HARDWARE
PERFORMANCE TESTS (S213-S5.4.2/S209-S4.3)

Report No.: 4919906-021

Test Date: July 30, 2022 **Item Code:** SnugRide SnugFit 35 DLX

Laboratory Ambient Conditions During Testing

Temperature: 73 °F

Relative Humidity: 50 %

Test	Compliance Requirement	Test Result	Pass/Fail
Temperature Resistance (FMVSS 213, S5.4.2), (FMVSS 209, S4.3.(b)) Exposure Time 24 Hours + 24 Hours (24 + 24 Hours Required)	No Functional Deterioration (NFD)	1. NFD 2. NFD 3. NFD	Pass Pass Pass
Push Buttons (FMVSS 213, S5.4.3.5(c)), (FMVSS 209 S4.3(d)(2))	Area ≥ 0.6 sq. in.)	0.67	Pass
	Dimensions, mm (inches)	21.5 x 20.0 mm (0.85 x 0.79 inches) Rectangular	N/A
	Minimum Linear Dimension >=10mm (0.39 inches)	20.0 mm (0.79 inches)	Pass
Lever Release	Cylinder Insertion	N/A	N/A[4]
Other	Two-finger Access	N/A	N/A[4]

BELT BUCKLE AND ADJUSTMENT HARDWARE
PERFORMANCE TESTS (S213-S5.4.2/S209-S4.3) (Continued)

Report No.: 4919906-021

Test	Compliance Requirement	Test Result	Pass/Fail
Buckle Latch (FMVSS 213, S5.4.3.5(d)), (FMVSS 209, S4.3(g)) Follows Temperature Resistance Cycles 200 (200 Required))	No Functional Deterioration (NFD)	1. NFD 2. NFD NFD	1. Pass 2. Pass 3. Pass

Buckle Latch (FMVSS 213, S5.4.3.5(d)), (FMVSS 209, S4.3(g)) Temperature Resistance metal to metal buckles Note: Cycle Button; Perform manual latching and unlatching prior to partial engagement test.	Partial Engagement Separation Force <5 lb.	Test Result As Received		Test Result After Temperature Resistance	
		Front	Inverted	Front	Inverted
		Sample 1 1) P 2) P 3) P	Sample 1 1) P 2) P 3) P	Sample 1 1) P 2) P 3) P	Sample 1 1) P 2) P 3) P
		Sample 2 1) P 2) P 3) P	Sample 2 1) P 2) P 3) P	Sample 2 1) P 2) P 3) P	Sample 2 1) P 2) P 3) P
		Sample 3 1) P 2) P 3) P	Sample 3 1) P 2) P 3) P	Sample 3 1) P 2) P 3) P	Sample 3 1) P 2) P 3) P

Remarks: P = Pass

Technicians: Charles Kehaya
Project Manager: Frank Savino

APPENDIX A

EQUIPMENT LIST AND CALIBRATION

SGS NORTH AMERICA INC.
TEST EQUIPMENT

NO.	ITEM	MANUFACTURER	MODEL	SERIAL NO.	CAL. PERIOD	DATE OF LAST CAL.	ACCURACY	REMARKS
				WEBBING TESTING				
1	Steel Ruler	Products Engineering	262-000	481610452	1 Year	7/21	+/-0.01 inch	Webbing Width
2	Hex-Bar Abrader	VSR Technologies	---	2053-0921	1Year*	9/21	---	*Timer-Counter Assembly and Weights
3	Weatherometer	Atlas Electric Co.	CXW	CB-12295	1 Year*	7/21	+/-1%	*Temp. and Voltage Meters
4	Weatherometer	Atlas Electric Co.	CXW	CB-1214	1 Year*	7/21	+/-1%	*Temp. and Voltage Meters
5	Weatherometer	Atlas Electric Co.	XW-WT	W0-3009	1 Year*	7/21	+/-1%	*Temp. and Voltage Meters
6	Color Change - Gray Scale	AATCC	---	---	---	---	---	Visual Comparison
7	Universal Testing Machine	Instron	1115	4742	1 Year	1/22	+/-1%	Webbing Strength
8	Universal Testing Machine	Instron	TTC	4344	1 Year	6/21	+/-1%	Webbing Strength
9	Universal Testing Machine	Instron	5585	5585P7194	1 Year	6/21	+/-1%	Webbing Strength
10	2″ Split Drum Grips	U.S. Testing Co.	---	---	---	---	---	Instron Fixture

SGS NORTH AMERICA INC.
TEST EQUIPMENT

NO.	ITEM	MANUFACTURER	MODEL	SERIAL NO.	CAL. PERIOD	DATE OF LAST CAL.	ACCURACY	REMARKS
			BUCKLE TESTING					
10	Salt Spray Chamber	Singleton Corp.	SCCH22	SCCH22-21947	---	---	---	Checked daily in accordance with ASTM B-117
11	Temperature Recorder	Honeywell	DR4300	14W47C4000 000849615	1 Year	10/21	+/- 5°F	Monitor Salt Spray Temperature
12	Temperature Humidity Chamber	Blue-M	FR-386PBX	AA278	1Year	4/22	+/-2°C +/-5% R.H	Temperature-Humidity Exposure
13	Temperature Humidity Chamber	Associated Environmental Systems	HD 518-4	12766	1 Year	1/22	+/-2°C +/-5% R.H	Temperature-Humidity Exposure
14	Temperature Chamber	Despatch	52392 V29	037-15	1 Year	4/22	+/-2°C +/-5% R.H	Temperature Exposure
15	Pushbutton Latch Fixture	U.S. Testing	---	---	1 Year*	7/22	---	Force checked prior to use. *Timer Counter
			STANDARD LABORATORY CONDITIONING					
16	Temperature / Humidity Recorder	Dickson	TH800	07150222	1Year	10/21	+/-2°F +/-5% R.H.	Monitor Room Conditioning

APPENDIX B

INTERPRETATION AND/OR DEVIATIONS FROM FMVSS NO. 213

NO INTERPRETATIONS OR DEVIATIONS FROM FMVSS NO. 213

APPENDIX C

FOOTNOTES (as applicable)

1. No buckle or manually adjusting device fitted to webbing (Ref. FMVSS 209 S5.3(c)), Resistance to buckle abrasion

2. FMVSS 209 5.1(f): Note-This test shall not be required on webbing made from material which is inherently resistant to micro-organisms.

3. Webbing was too short to perform this test

4. Not equipped in a manner applicable for this test

5. This test is not performed when the test for Non-degraded webbing fails or is not performed

APPENDIX D

PHOTOGRAPHS

LISTS OF PHOTOGRAPHS

The following section identifies photographed testing equipment.

Page Number	Description of Photograph
D-2	Corrosion Resistance
D-3	Temperature Humidity Chamber
D-4	Temperature Chamber
D-5	Button Cycling Apparatus
D-6	Breaking Strength Apparatus
D-7	Resistance to Light
D-8	Hex Bar Abrasion Apparatus

The following section identifies photographs of the seat.

Photograph Number	Description of Photograph
D-9	Top of Box
D-10	Side of Box
D-11	Front of Seat
D-12	Side of Seat
D-13	Back of Seat
D-14	Close-Up Buckle
D-15	Manufacturer ID Label on CRS
D-16	Manufacturer ID Label on Base (if applicable)
D-17	Registration Card – side #1
D-18	Registration Card – side #2

D-2



D-3



Temperature/Humidity Chamber

D-4



Temperature Chamber

D-5



Button Cycling Apparatus

D-6




Instron Universal Testing Machine

D-7



Weatherometer

D-8

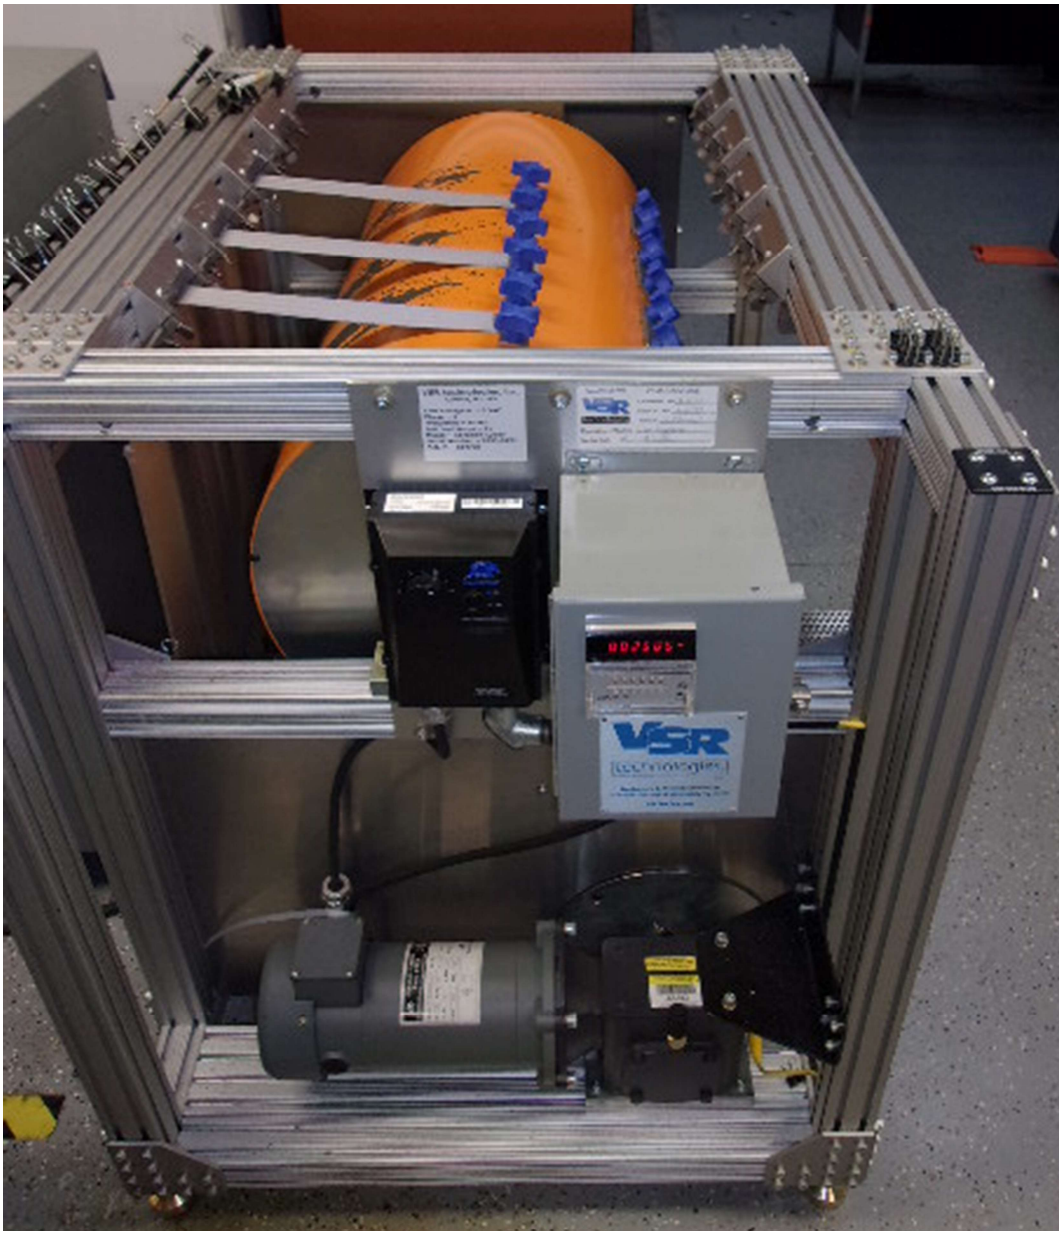

Hex Bar Abrasion Apparatus

D-9


GRACO
GRACO
ITEM#2121348
VICTORVILLE
C/4503777466
MADE IN CHINA 246
SNUGRIDE® SNUGFIT™ 35 DLX
INFANT CAR SEAT
GRACO
GRACO
GRACO
PIERCE™ FASHION
REAR-FACING FOR INFANTS
4-35 lb
(1.8-16 kg)

D-10


GRACO
PIERCE™ FASHION
SNUGRIDE® SNUGFIT™ 35 DLX
INFANT CAR SEAT
gracobaby.com

D-11



D-12




D-13



D-14



D-15

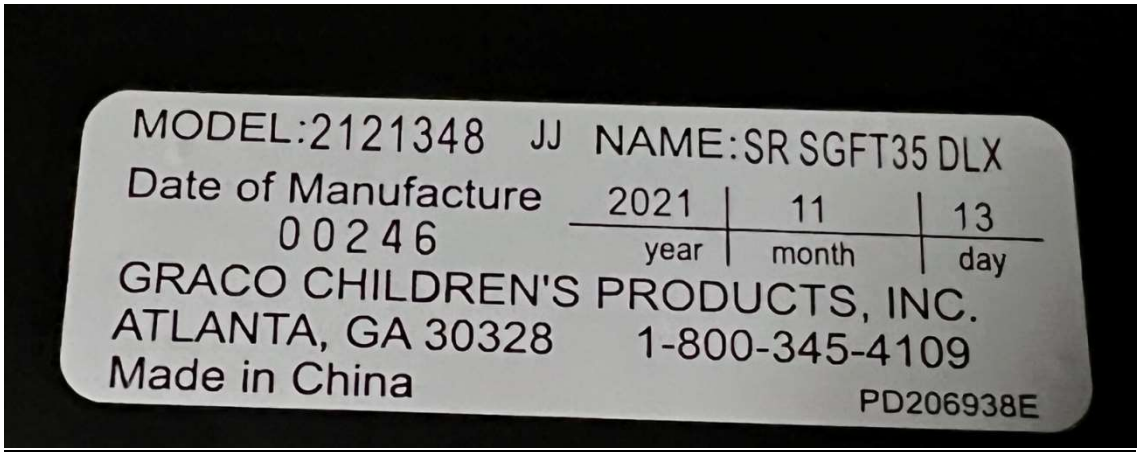
MODEL:2121348 JJ NAME:SR SGFT35 DLX
Date of Manufacture
00246
2021 | 11 | 13
year | month | day
GRACO CHILDREN'S PRODUCTS, INC.
ATLANTA, GA 30328 1-800-345-4109
Made in China
PD206938E

D-16


MODEL:2121348 JJ NAME:SR SGFT35 DLX
Date of Manufacture
00246
2021 | 11 | 13
year | month | day
GRACO CHILDREN'S PRODUCTS, INC.
ATLANTA, GA 30328 1-800-345-4109
Made in China
PD206938E

D-17

IMPORTANTE: En caso de una retirada del mercado, solo podremos contactarle si tenemos su nombre y dirección. Usted DEBE enviarnos por correo la tarjeta adjunta o inscribirse en línea para añadirse a la lista para retiradas.

FOR YOUR CHILD'S CONTINUED SAFETY

Please take a few moments to promptly fill out and return the attached card or register online.

Although child restraint systems undergo testing and evaluation, it is possible that a child restraint could be recalled.

In case of recall, we can reach you only if we have your name and address, so please send in the card or register online to be on our recall list.

Please fill this card out and mail it NOW, or register online at http://www.gracobaby.com/carseatregistration while you are thinking about it.

The card is already addressed and we've paid the postage.

LAPC0063K

Tear off and mail this part

Consumer: Just fill in your name and address. Please print.

Your first name

Your last name

Your street address

City

State Zip Code –

CHILD RESTRAINT REGISTRATION CARD

MODEL: 2121348 JJ NAME: SR SGFT35 DLX

Date of Manufacture 00246 — 2021 (year) | 11 (month) | 13 (day)

GRACO CHILDREN'S PRODUCTS, INC.
ATLANTA, GA 30328 1-800-345-4109
Made in China PD206938E

D-18



IMPORTANT

In case of a recall, we can reach you only if we have your name and address. You MUST send in the attached card or register online to be on our recall list.

We've already paid the postage.

Do it today.

21

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST-CLASS MAIL PERMIT NO. 66 ELVERSON PA

POSTAGE WILL BE PAID BY ADDRESSEE

GRACO
CHILDREN'S PRODUCTS, INC.
P.O. BOX 169
ELVERSON, PA 19520-9901