



Service Bulletin

File in Section: -

Bulletin No.: 16-NA-172

Date: January, 2018


INFORMATION

Subject: Information on Removal of Wheel Washers Prior to Installation of Outer Dual Rear Wheel

Brand:	Model:	Model Year:		VIN:		Engine:	Transmission:
		from	to	from	to		
Chevrolet	Express	2016	2018			All	All
GMC	Savana	2016	2018			All	All

Involved Region or Country	North America, Middle East and Israel
Additional Options (RPO)	Equipped with Rear Dual Wheel Configuration (RPO R05)

Wheel Washer Information

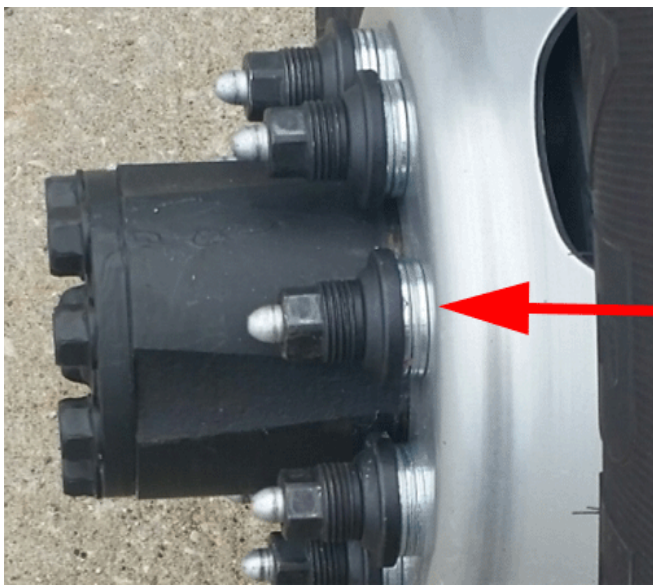

4520743



4520745

During transportation preparation, the outer dual rear wheels are removed and 3 washers are installed on each wheel stud for proper lug nut torque. This ensures the nut threads are not damaged by bottoming out on the wheel bolt.



4520746

Prior to reinstallation of the outer dual rear wheels, ensure that the washers are removed and inspect wheel bolts and lug nut threads for damage.

Important: When the vehicle is new, or whenever a wheel, wheel bolt or wheel nut is replaced, check the wheel nut torque after 160, 1,600, and 10,000 km (100, 1,000, and 6,000 mi) of driving. For proper wheel nut tightening information see “Wheel Nut Torque” under Specifications. This information can also be found in the Owner’s Manual under “Vehicle Care/Wheels and Tires/Dual Tire Rotation.”

Version	3
Modified	August 29, 2016 – Added the 2017 Model Year and Important statement. January 19, 2018 — Updated Model Years.

