
 HYUNDAI Technical Service Bulletin	GROUP BODY ELECTRICAL	NUMBER 18-BE-007
	DATE MAY, 2018	MODEL(S) SEE BELOW FOR APPLICABLE MODELS
SUBJECT: CLOCK TIME INACCURACY (DISPLAY AUDIO)		

Description: This bulletin describes the procedure to determine if the vehicle’s display audio radio unit needs to be replaced as a result of the clock time inaccuracy (i.e. Resets overnight, loses/gains time).



SYMPTOM(S)
Clock mismatch

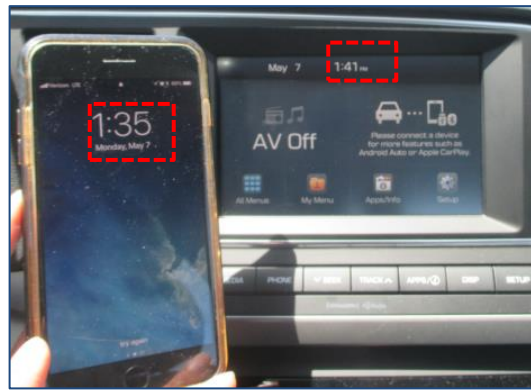

Applicable Vehicles:	Display Audio Models:	
	<ul style="list-style-type: none"> • 17MY–18MY Santa Fe Sport (AN) • 17MY –18MY Elantra (AD) • 16MY–18MY Sonata (LF) 	<ul style="list-style-type: none"> • 17MY–18MY Santa Fe (NC) • 17MY Veloster (FS) • 18MY Sonata HEV (LF HEV)


Warranty Information: Normal warranty applies where applicable.

Diagnostic Diagram:

1. Start the vehicle by using the key (A), or with the **Start Stop Button (A)**.



2. Set vehicle clock to an accurate time reference (i.e. Cellular Phone).
 - Press Setup hard button
 - Select Date/Time on the display
 - Tap the ▲▼ icon to adjust the Hour, Min, or AM/PM

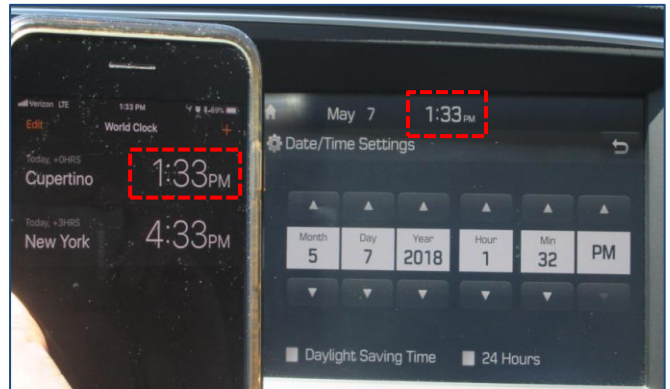

3. Check vehicle clock displayed at top center of radio display next day. If the difference between the vehicle clock is greater than 2 minutes (>2 minutes), replace the radio assembly.

