

Driver's Side Rear Door Molding End Is Loose?


AFFECTED VEHICLES

Year	Model	Trim
2019	RDX	ALL

We're getting reports that the door molding on the driver side rear door starts to come loose at the back end. From our investigation, this issue may result from the molding clip coming loose due to a curvature in the molding.

If you get a vehicle in with this issue, here's how you can fix it for now.

1. Remove the rear door molding.
2. Cut a 10 mm x 30 mm piece of wool felt (must be 0.5 mm thick), and wrap it around the door edge as shown. Make sure 5 mm is hanging down evenly on both sides.

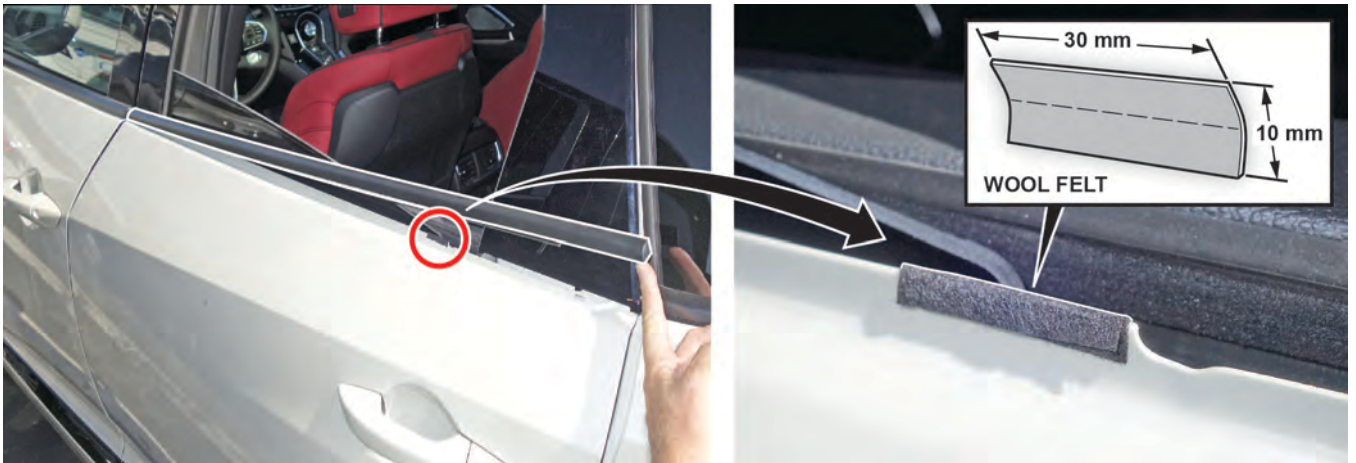

3. Reinstall the molding.