

Technical product information

Topic	Flying Spur - Rearview camera coding message
Market area	United States E05 Bentley USA and rest America (6E05)
Brand	Bentley
Transaction No.	2052111/1
Level	EH
Status	Approval
Release date	

New customer code

Object of complaint	Complaint type	Position
driver assist systems, convenience features -> parking aid, park assist system, rear traffic alert -> reversing camera picture	functionality -> faulty display	

Vehicle data

Flying Spur

Sales types

Type	MY	Brand	Designation	Engine code	Gearbox code	Final drive code
4W2*	2019	E		*	*	*

Documents

Document name
master.xml



Customer statement / workshop findings

When using Offboard Diagnostic Information System (ODIS) a message relating to 006C – Camera System Rear View not coded is shown on the diagnostic tester screen

Technical background

The prompt is mainly evident when the Model/Engine type is selected

Production change

No further improvement can be offered

Measure

Referring to Figure 1, When the screen is shown **ALWAYS** select **CLOSE**

- Although the rear view camera is shown as not coded, this should be ignored as the camera is coded correctly, the prompt has no negative effect on the performance of the rear view camera system



WARNING

Do not under any circumstances select Perform coding as the warning message as shown in Figure 2 will remain present, DTC's will also be evident which cannot be easily rectified

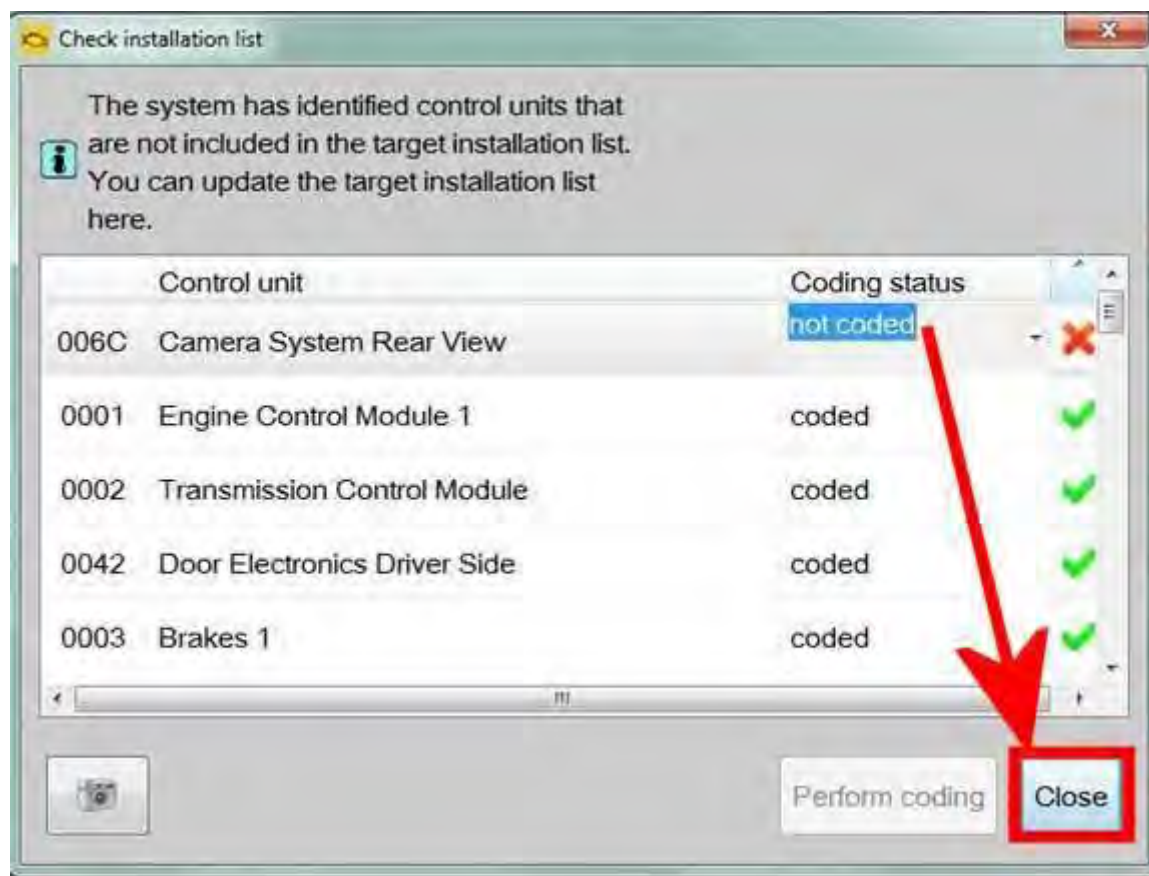


Figure 1



Figure 2