
ION Redacted PURSUANT TO THE F
ORMATION ACT (FOIA), 5 U.S.C. 552



INFORMATION Redacted PURSUANT TO THE FREEDOM OF
INFORMATION ACT (FOIA), 5 U.S.C. 552(B)(6)





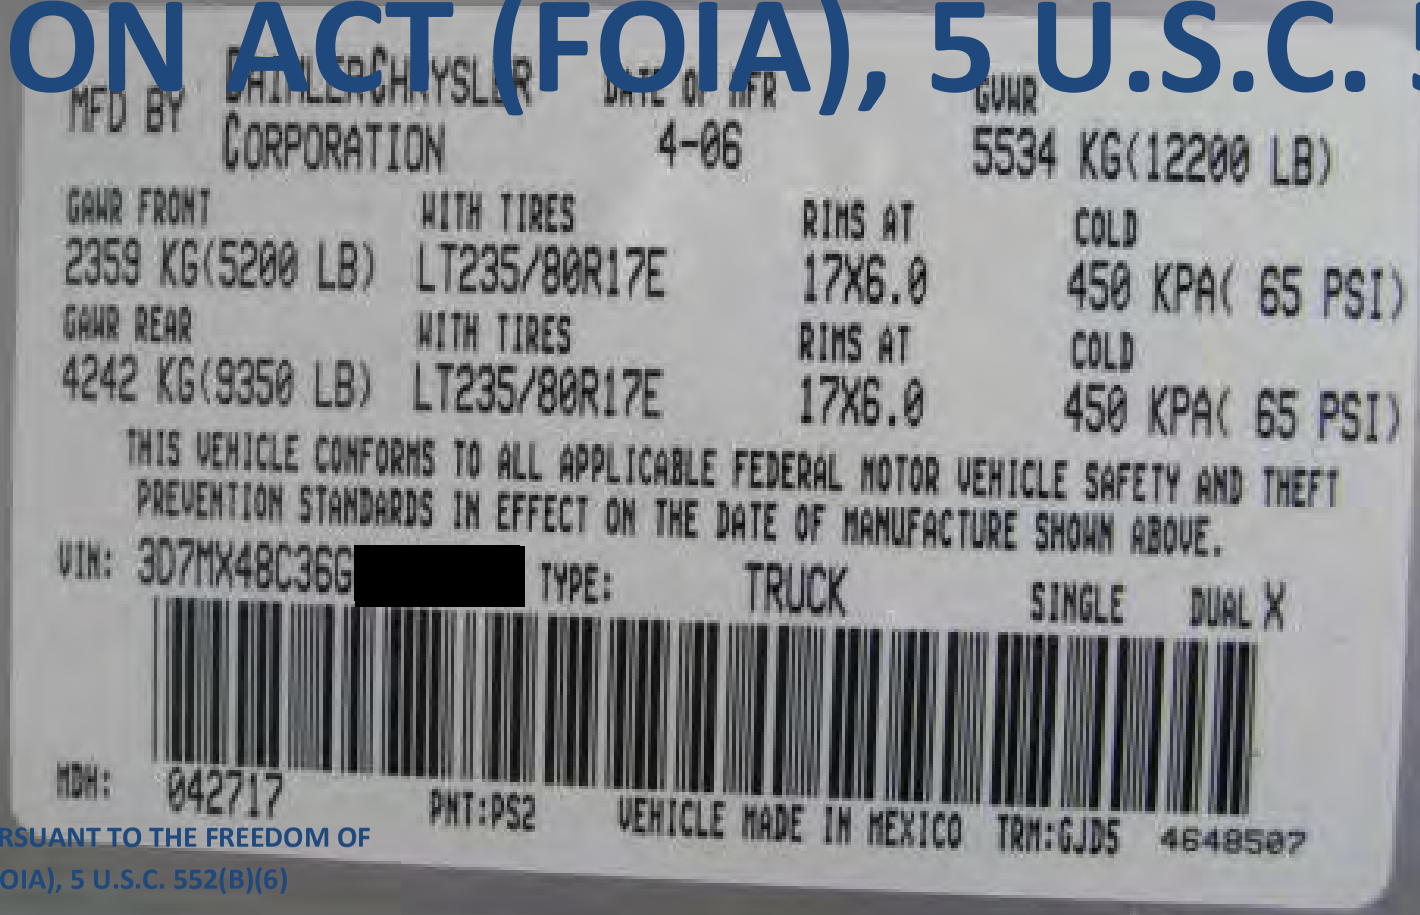


HYUNDAI
DODGE
646-1200


DISCOUNT
SAVE
DODGE
646-1200
4X4


























929


929


929










0
10
20
40
20
0
140
160
180
200
100
110
120
MPH km/h
111096



















COOPER










COOPER H/T


GOODYEAR


















PRESS














BV6Q-3B836-AB


MFD BY DAIMLERCHRYSLER CORPORATION
DATE OF MFR 8-05
GVWR 5534 KG(12200 LB)
GAWR FRONT 2359 KG(5200 LB)
WITH TIRES LT235/80R17E
RIMS AT 17X6.0
COLD 450 KPA(65 PSI)
GAWR REAR 4242 KG(9350 LB)
WITH TIRES LT235/80R17E
RIMS AT 17X6.0
COLD 450 KPA(65 PSI)
THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.
VIN: 3D7MX48C36[redacted]
TYPE: TRUCK
SINGLE
DUAL X
MDH: 081216
PNT:PR4
VEHICLE MADE IN MEXICO
TRM:M9D5
4648507






RAM 3500
BIG HORN
EDITION


JOHN DEERE
JOHN DEERE
4X4
SLT
DODGE


JOHN DEERE
JOHN DEERE
HEAVY DUTY
4X4
SLT
DODGE


JOHN DEERE
JOHN DEERE
HEAVY DUTY
DODGE




2
3
4
5
RPM x1000
0
10
20
30
40
50
60
70
80
90
100
110
120
80
100
120
140
160
180
200
40
20
0
MPH km/h
765 10
40
0
110
200
140
245




















































2.4
TURBO
DODGE


529AE

Cummins
24V
TURBO DIESH
DODGE
TURBO DIESEL ENGINE OIL
SEE OWNERS


SUPPLEMENTAL TIRE PRESSURE INFORMATION
FOR LIGHT LOAD AND MAX LOAD CONDITIONS
LIGHT LOAD DEFINITION: 2 OCCUPANTS (150 LBS. EACH) PLUS 200 LBS. CARGO
MAX LOAD DEFINITION: AS DEFINED ON DRIVERS SIDE B-PILLAR PLACARD
FRONT
REAR
LIGHT LOAD INFLATION PRESSURE (COLD)
410 kPa, 60 PSI
280 kPa, 40 PSI
MAX LOAD INFLATION PRESSURE (COLD)
450 kPa, 65 PSI
450 kPa, 65 PSI
TIRE SIZE
LT235/80R17E
LT235/80R17E
SEE OWNERS MANUAL FOR ADDITIONAL INFORMATION
6G132974




3D7K S28D35G

MFD BY DAIMLERCHRYSLER CORPORATION | DATE OF MFR 4-05 | GVWR 3992 KG(08800 LB)

GAWR FRONT	WITH TIRES	RIMS AT	COLD
2359 KG(5200 LB)	LT265/70R17E	17X8.0	410 KPA(60 PSI)
GAWR REAR	WITH TIRES	RIMS AT	COLD
2727 KG(6010 LB)	LT265/70R17E	17X8.0	485 KPA(70 PSI)

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

VIN: 3D7KS28D85G[redacted] TYPE: TRUCK SINGLE X DUAL

MDH: 040100 185AA PNT:PDM VEHICLE MADE IN MEXICO TRM:VLDV 4648507


RPM X1000
58964
MPH km/h
P R N D 2 1




458
RAM 2500


RAM 2500
HEMI






D


TRACTOR SUPPLY CO
TRACTOR SUPPLY CO


TRACTOR
SUPPLY CO.


5.7 LITER
HEMI
MDS ON


RAM 2500


RAM 2500








5.7 LITER
HEMI
MAGNUM




RAM 2500


RAM 25












TUBELESS
M+S


MAX LOAD 1047
MICHELIN




PLIES
PLIES



















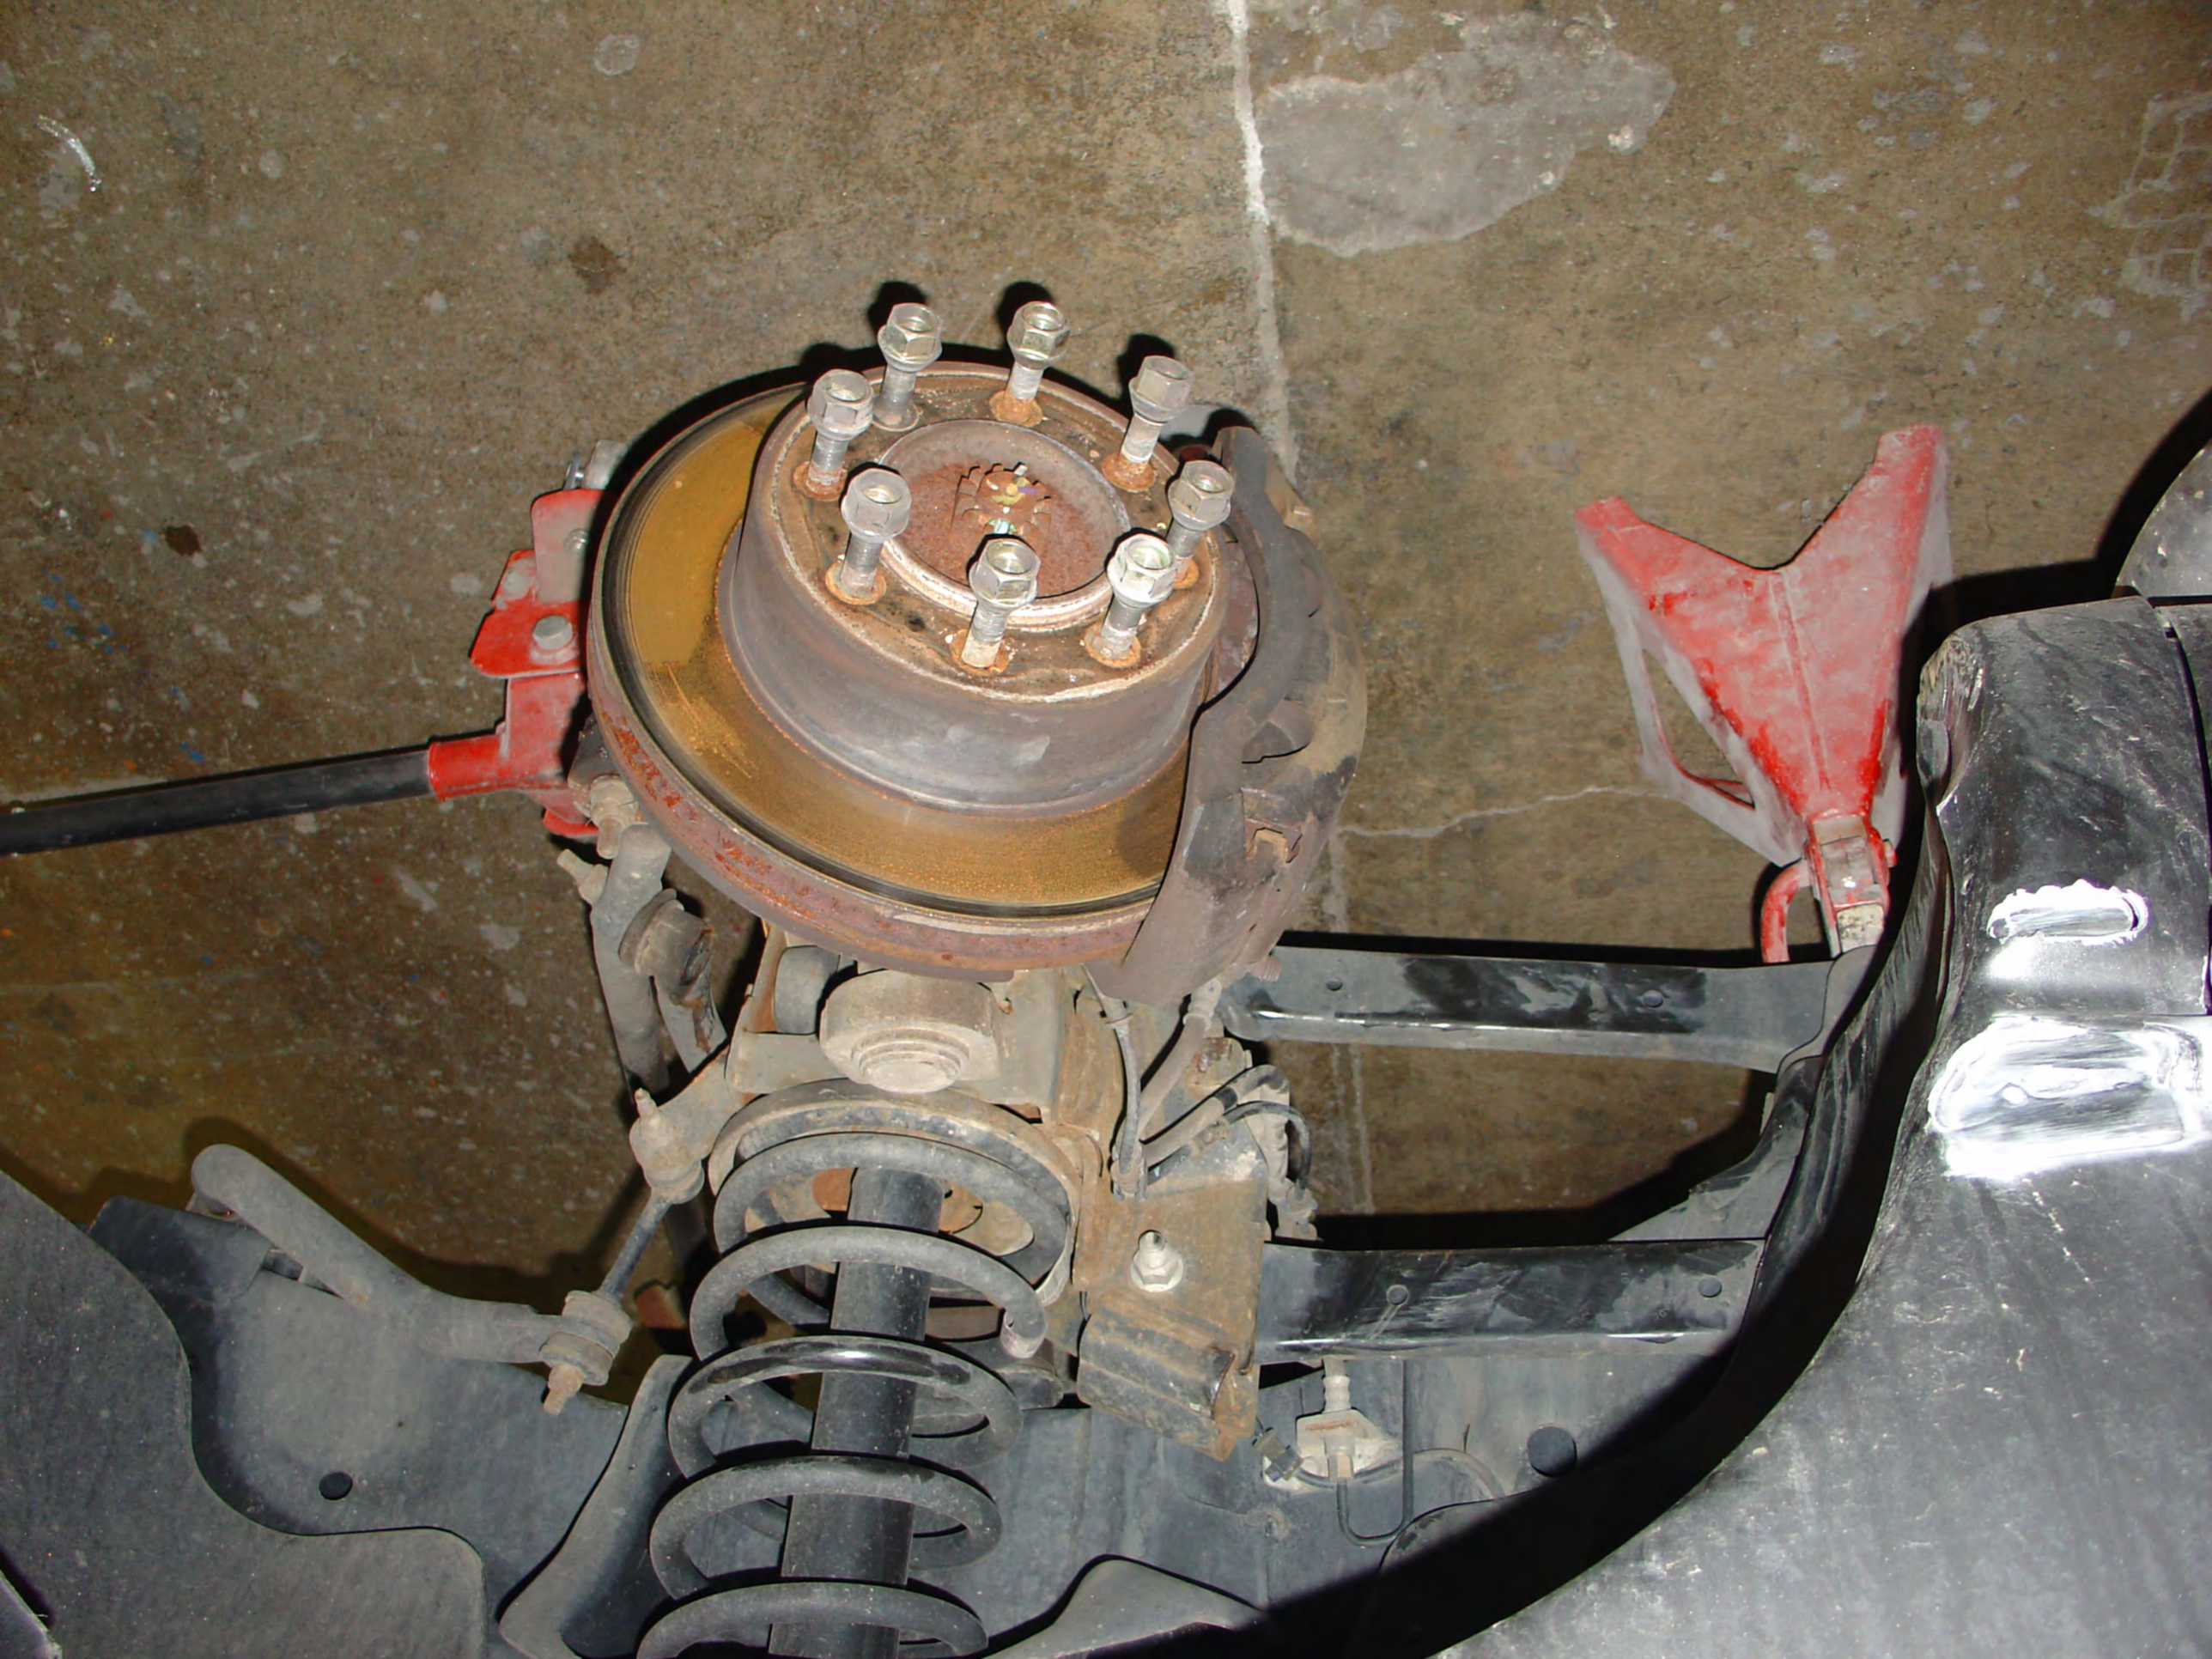

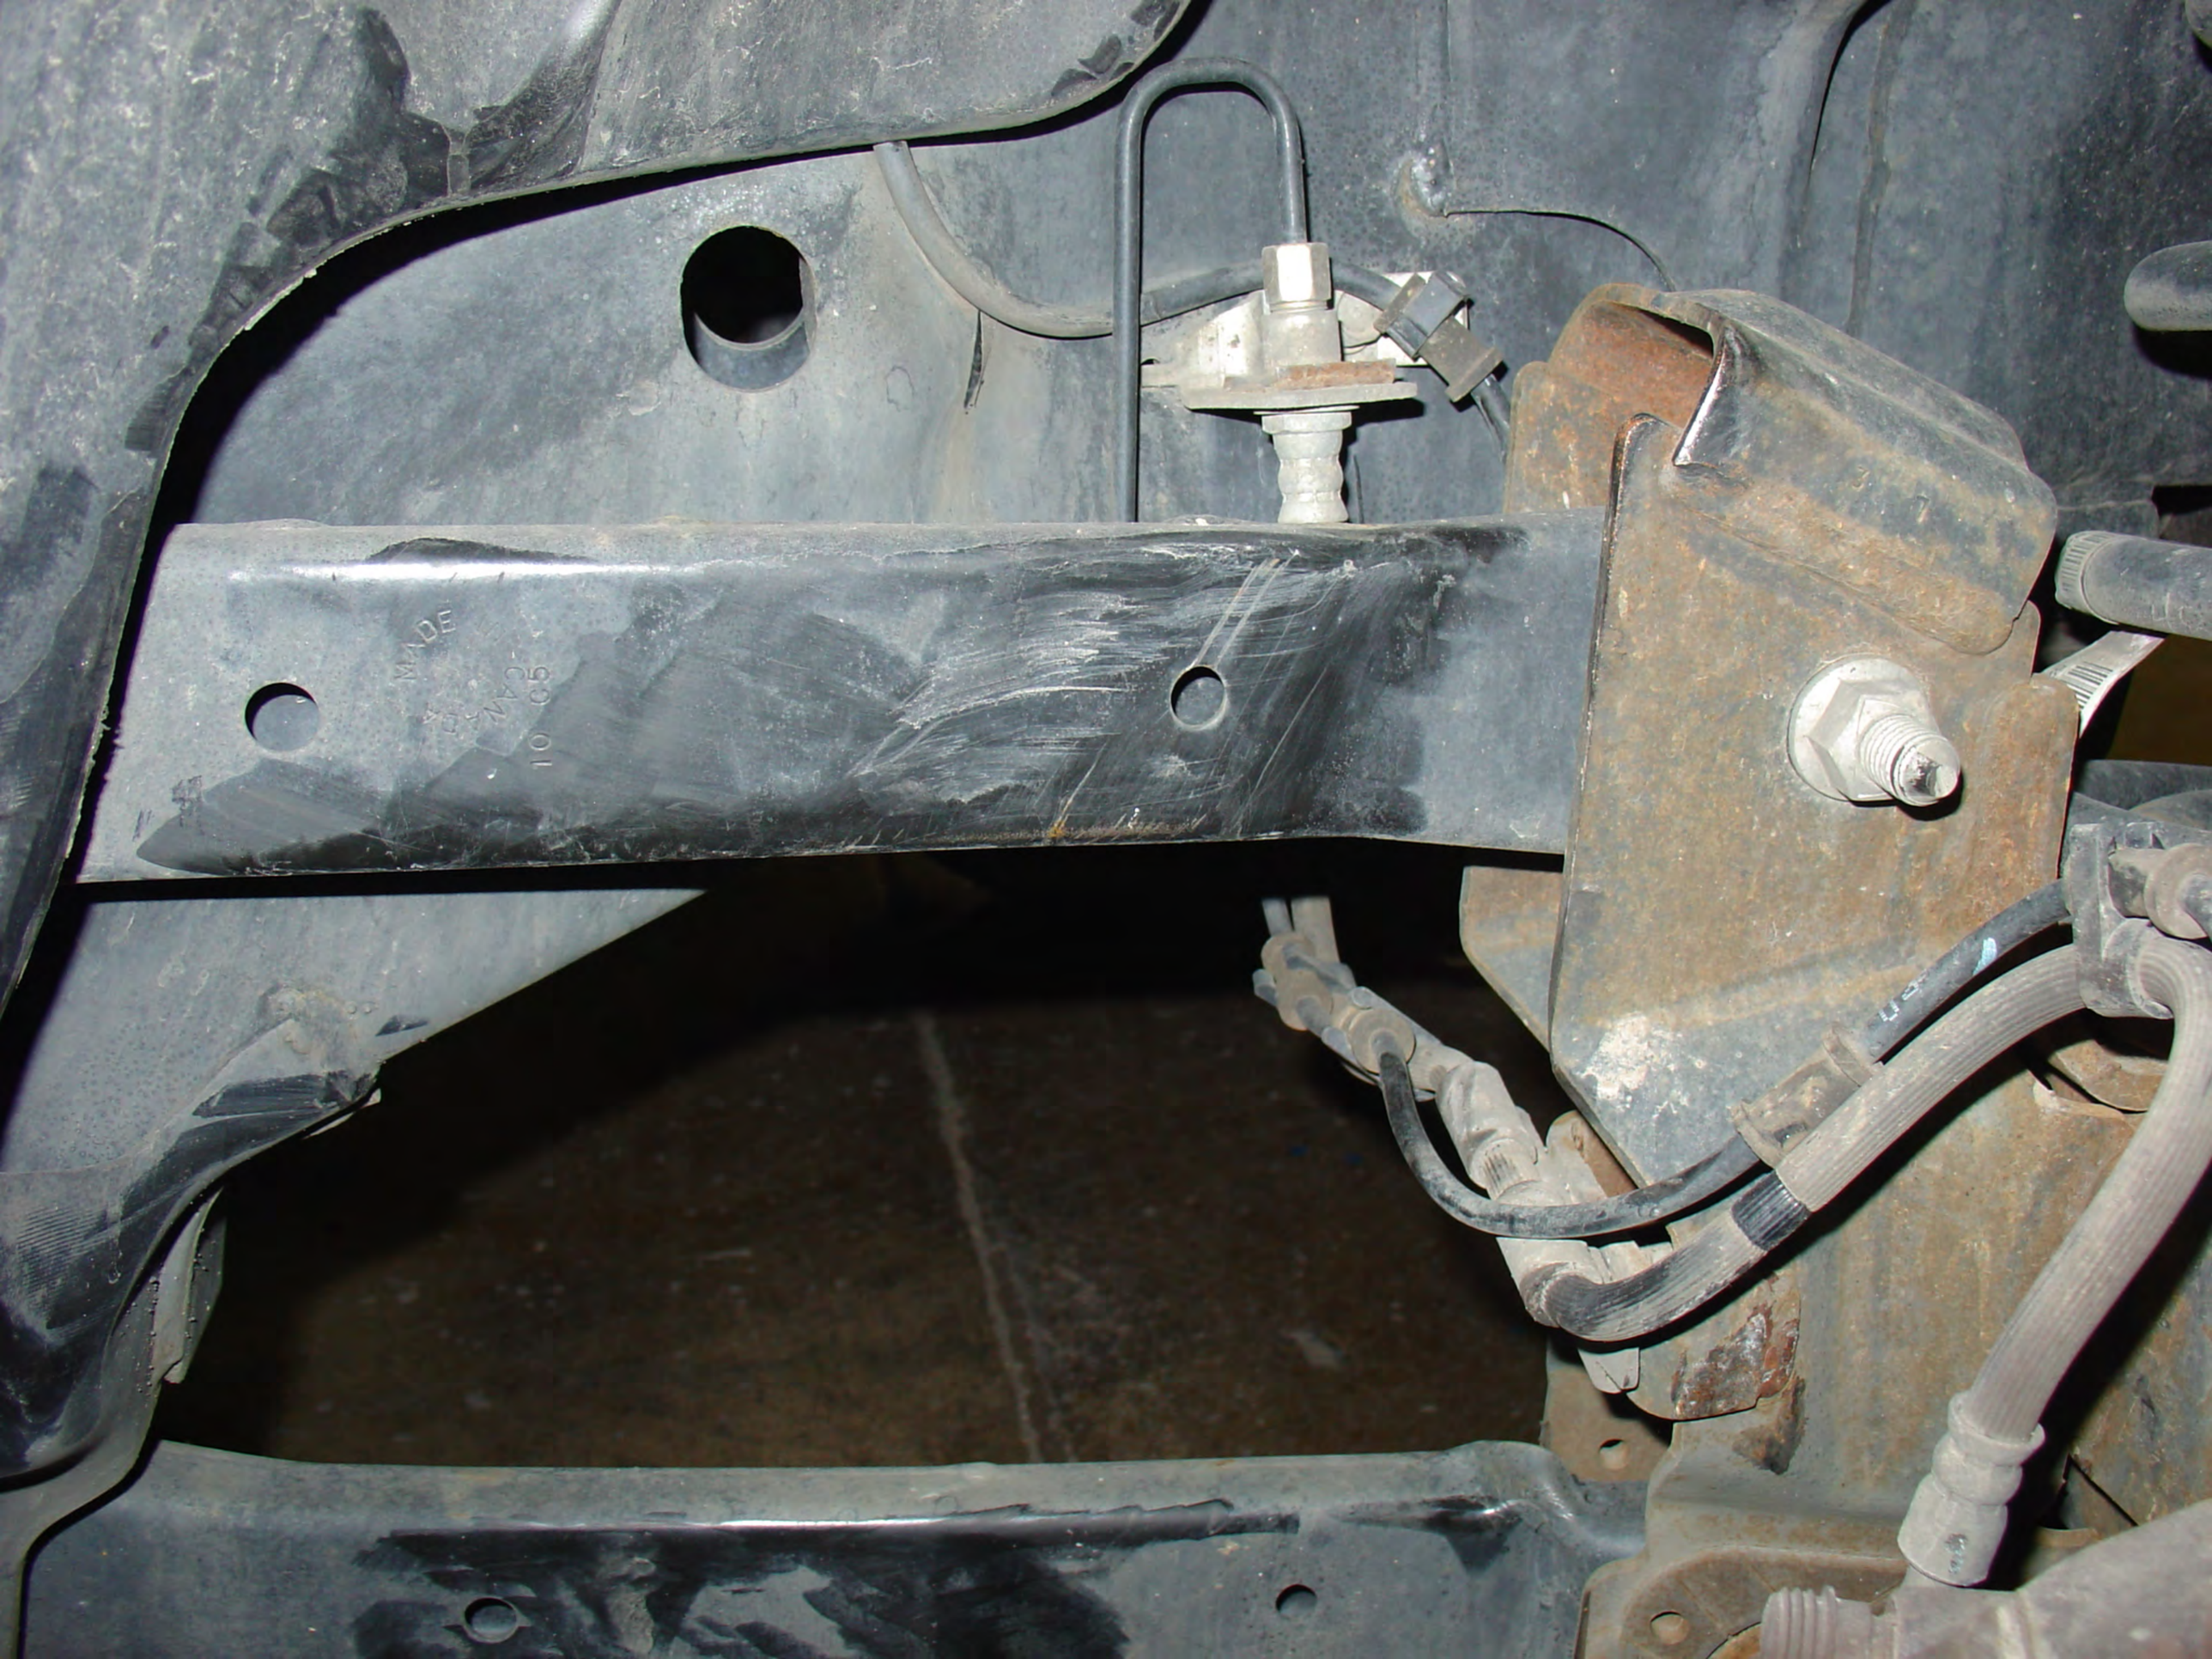
MADE
CANADA
10 05

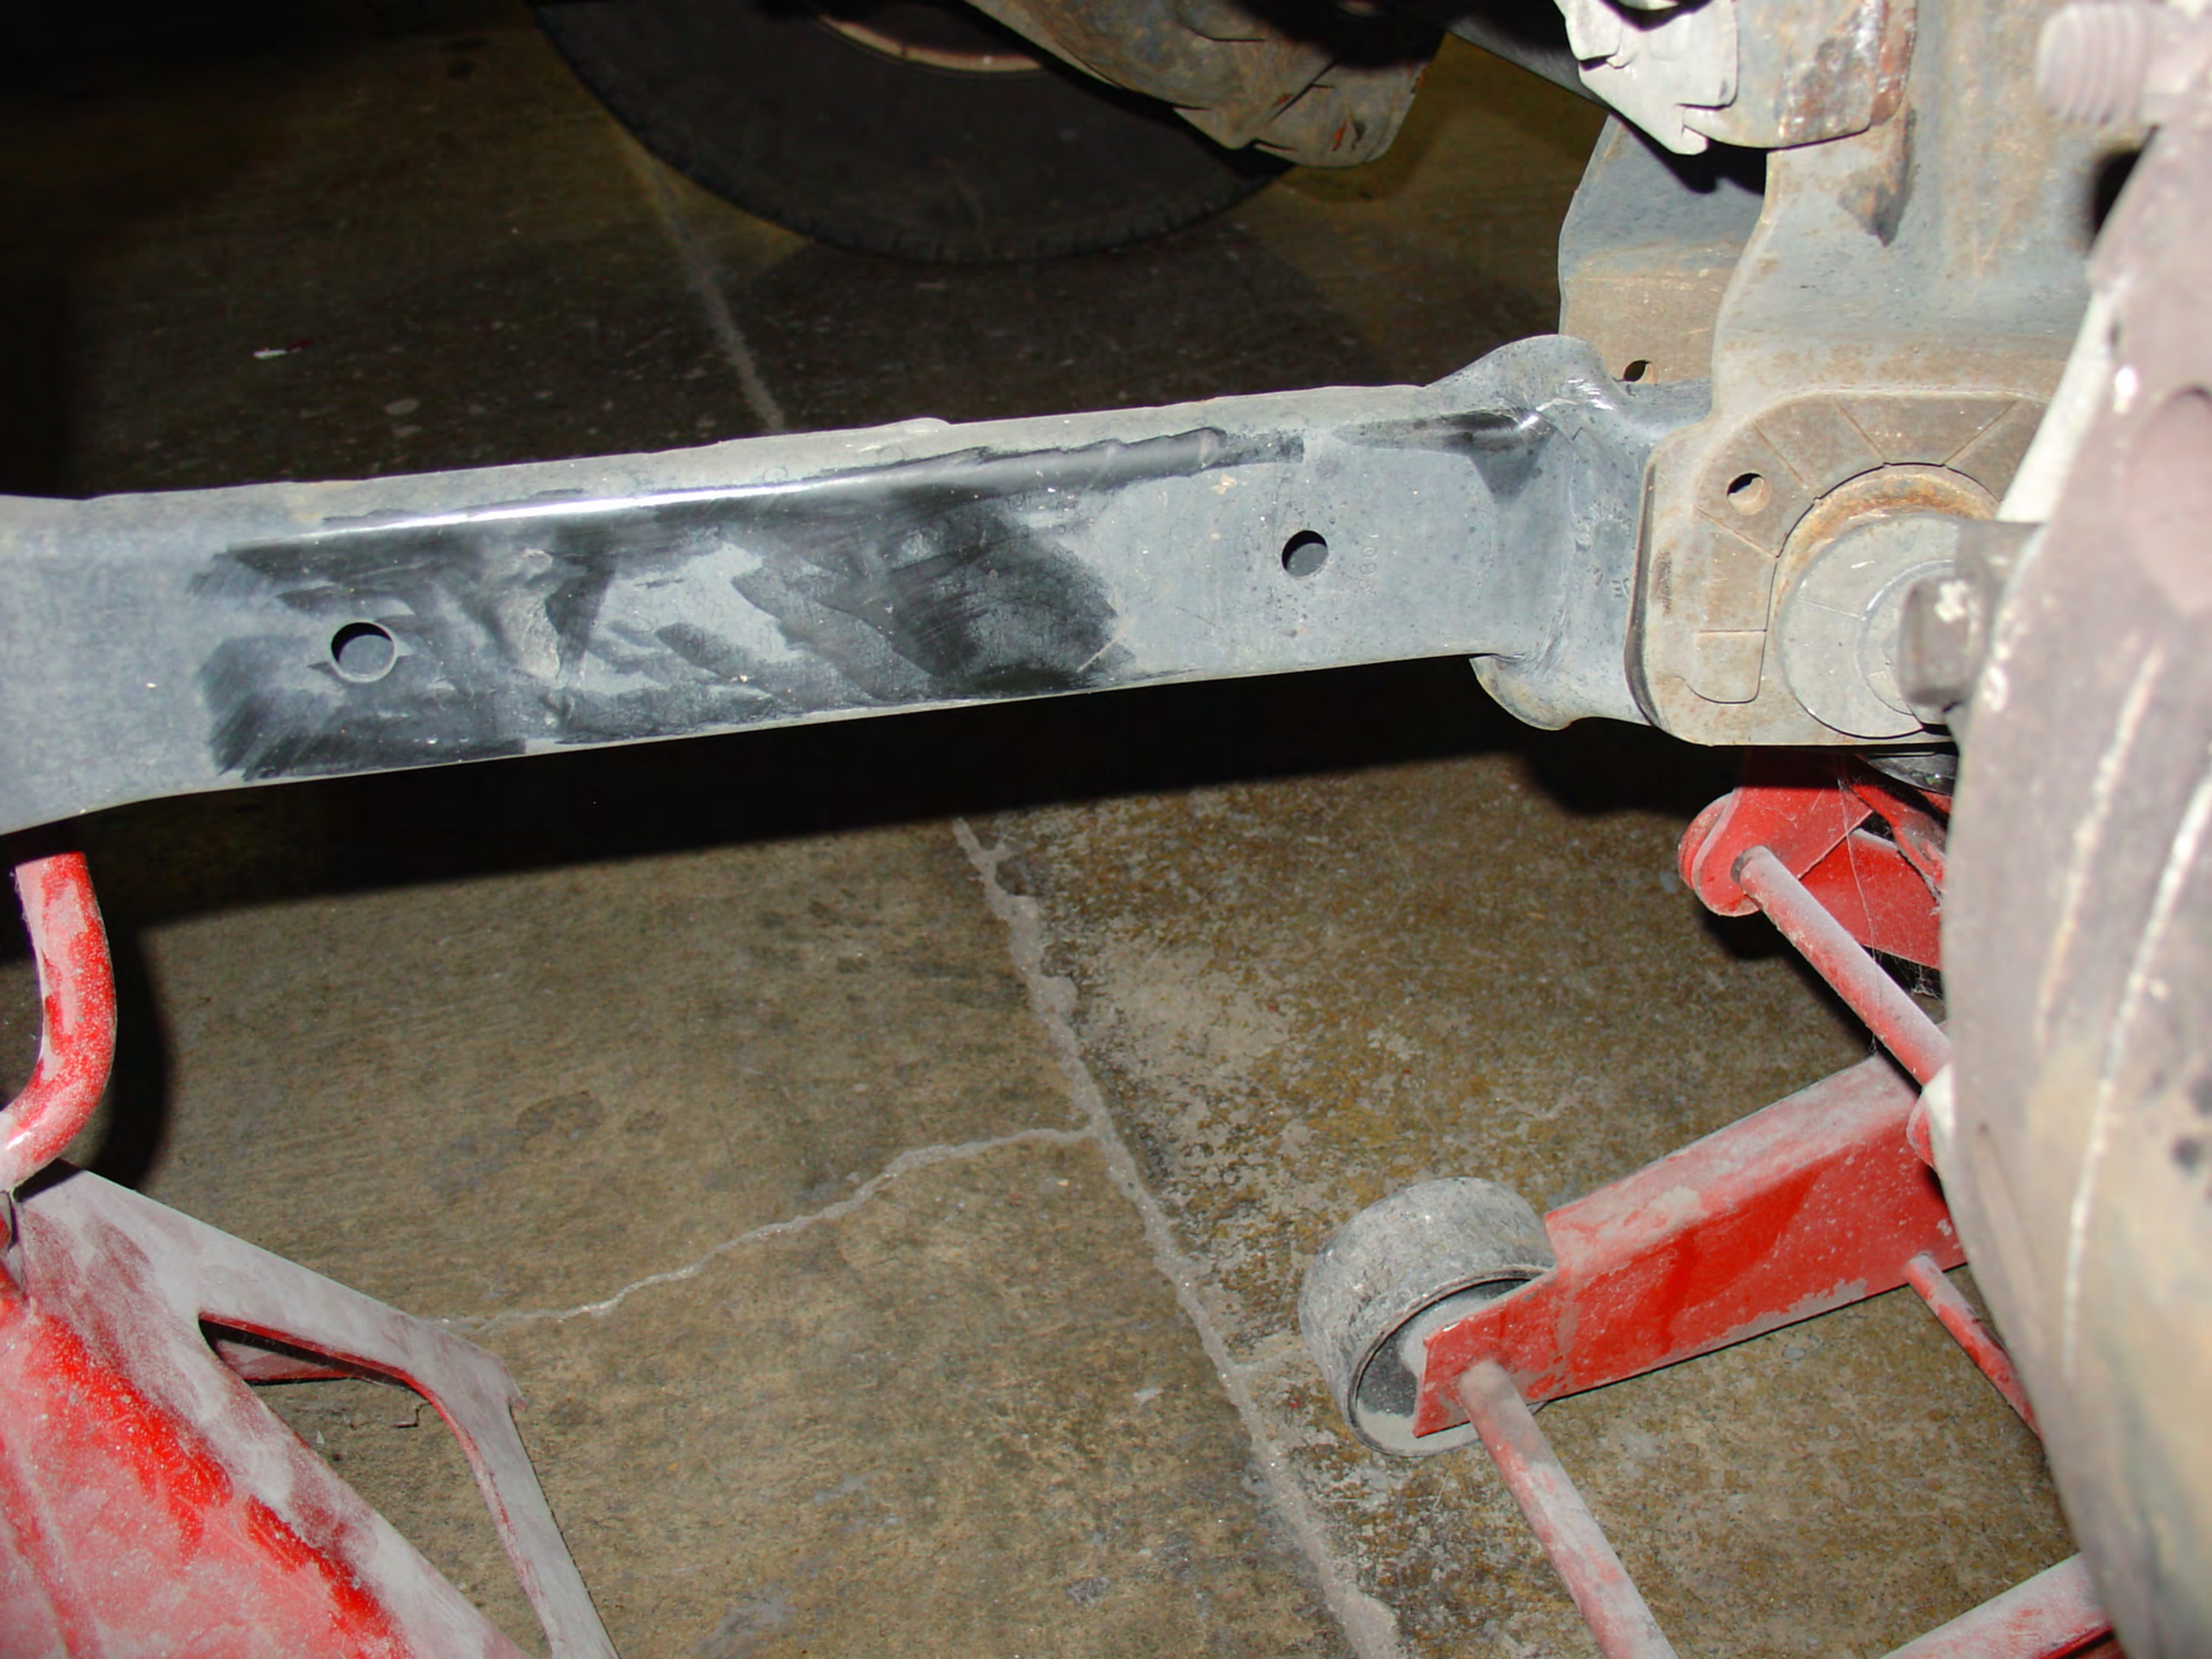

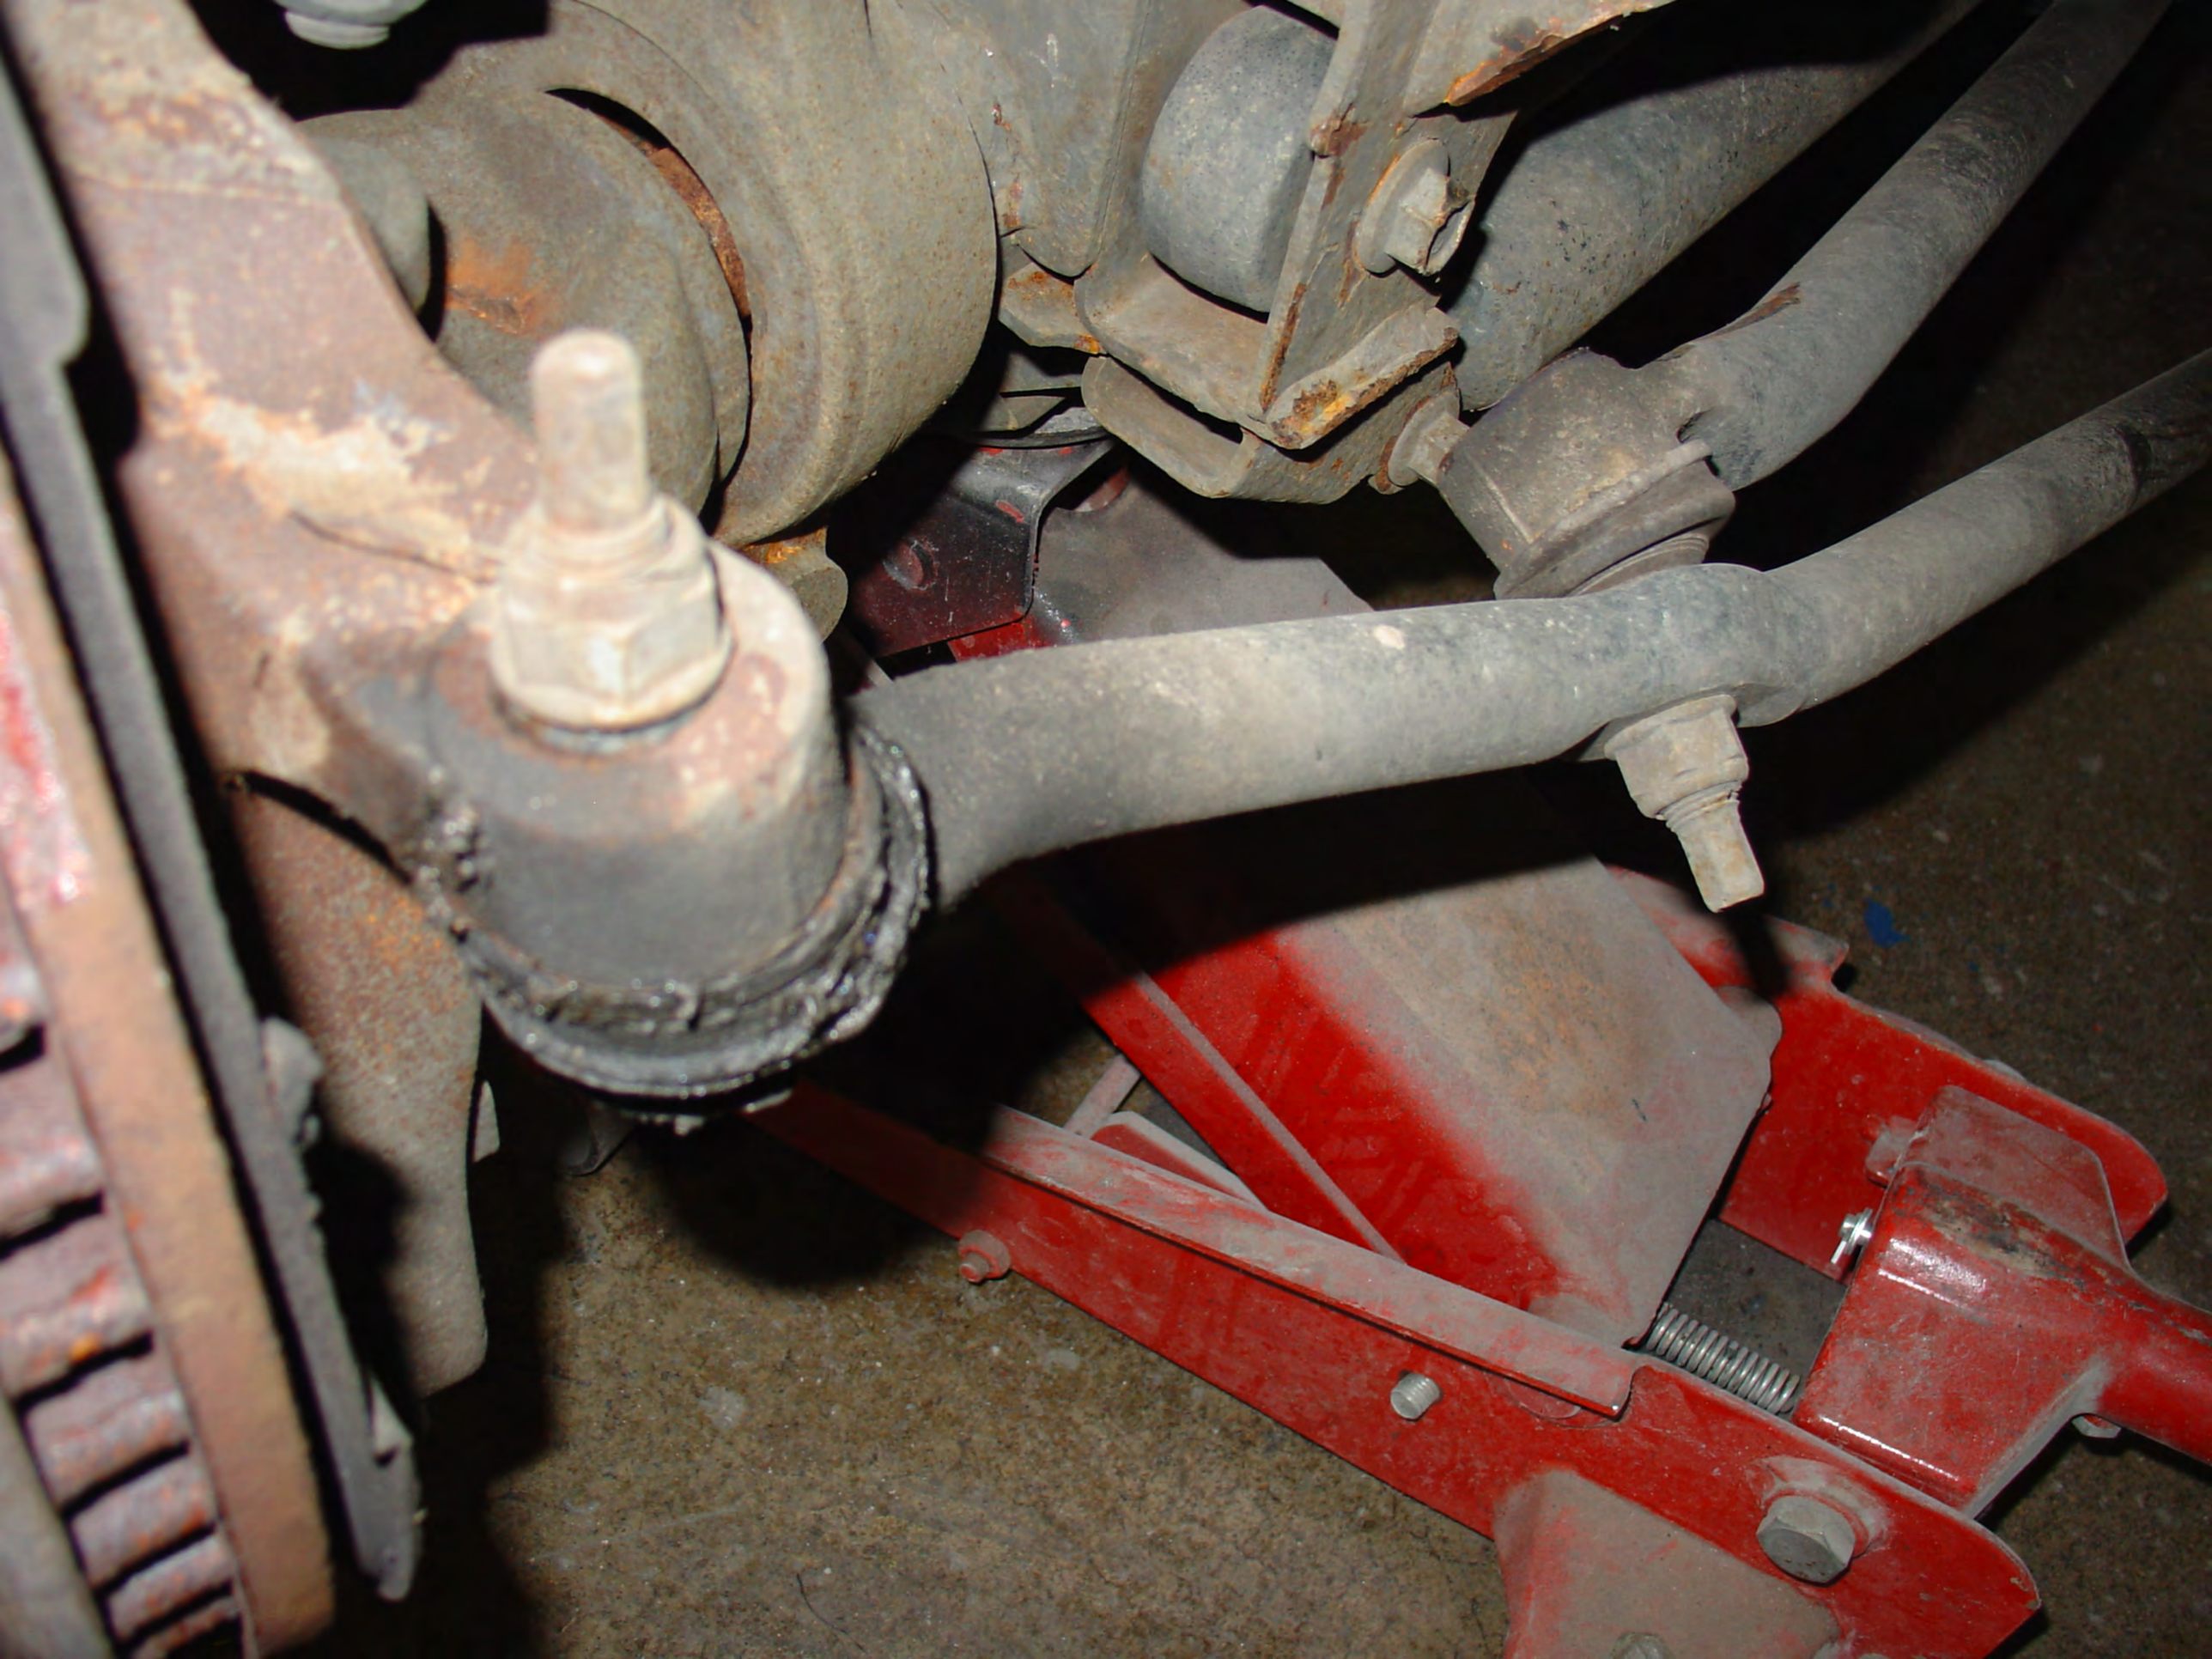













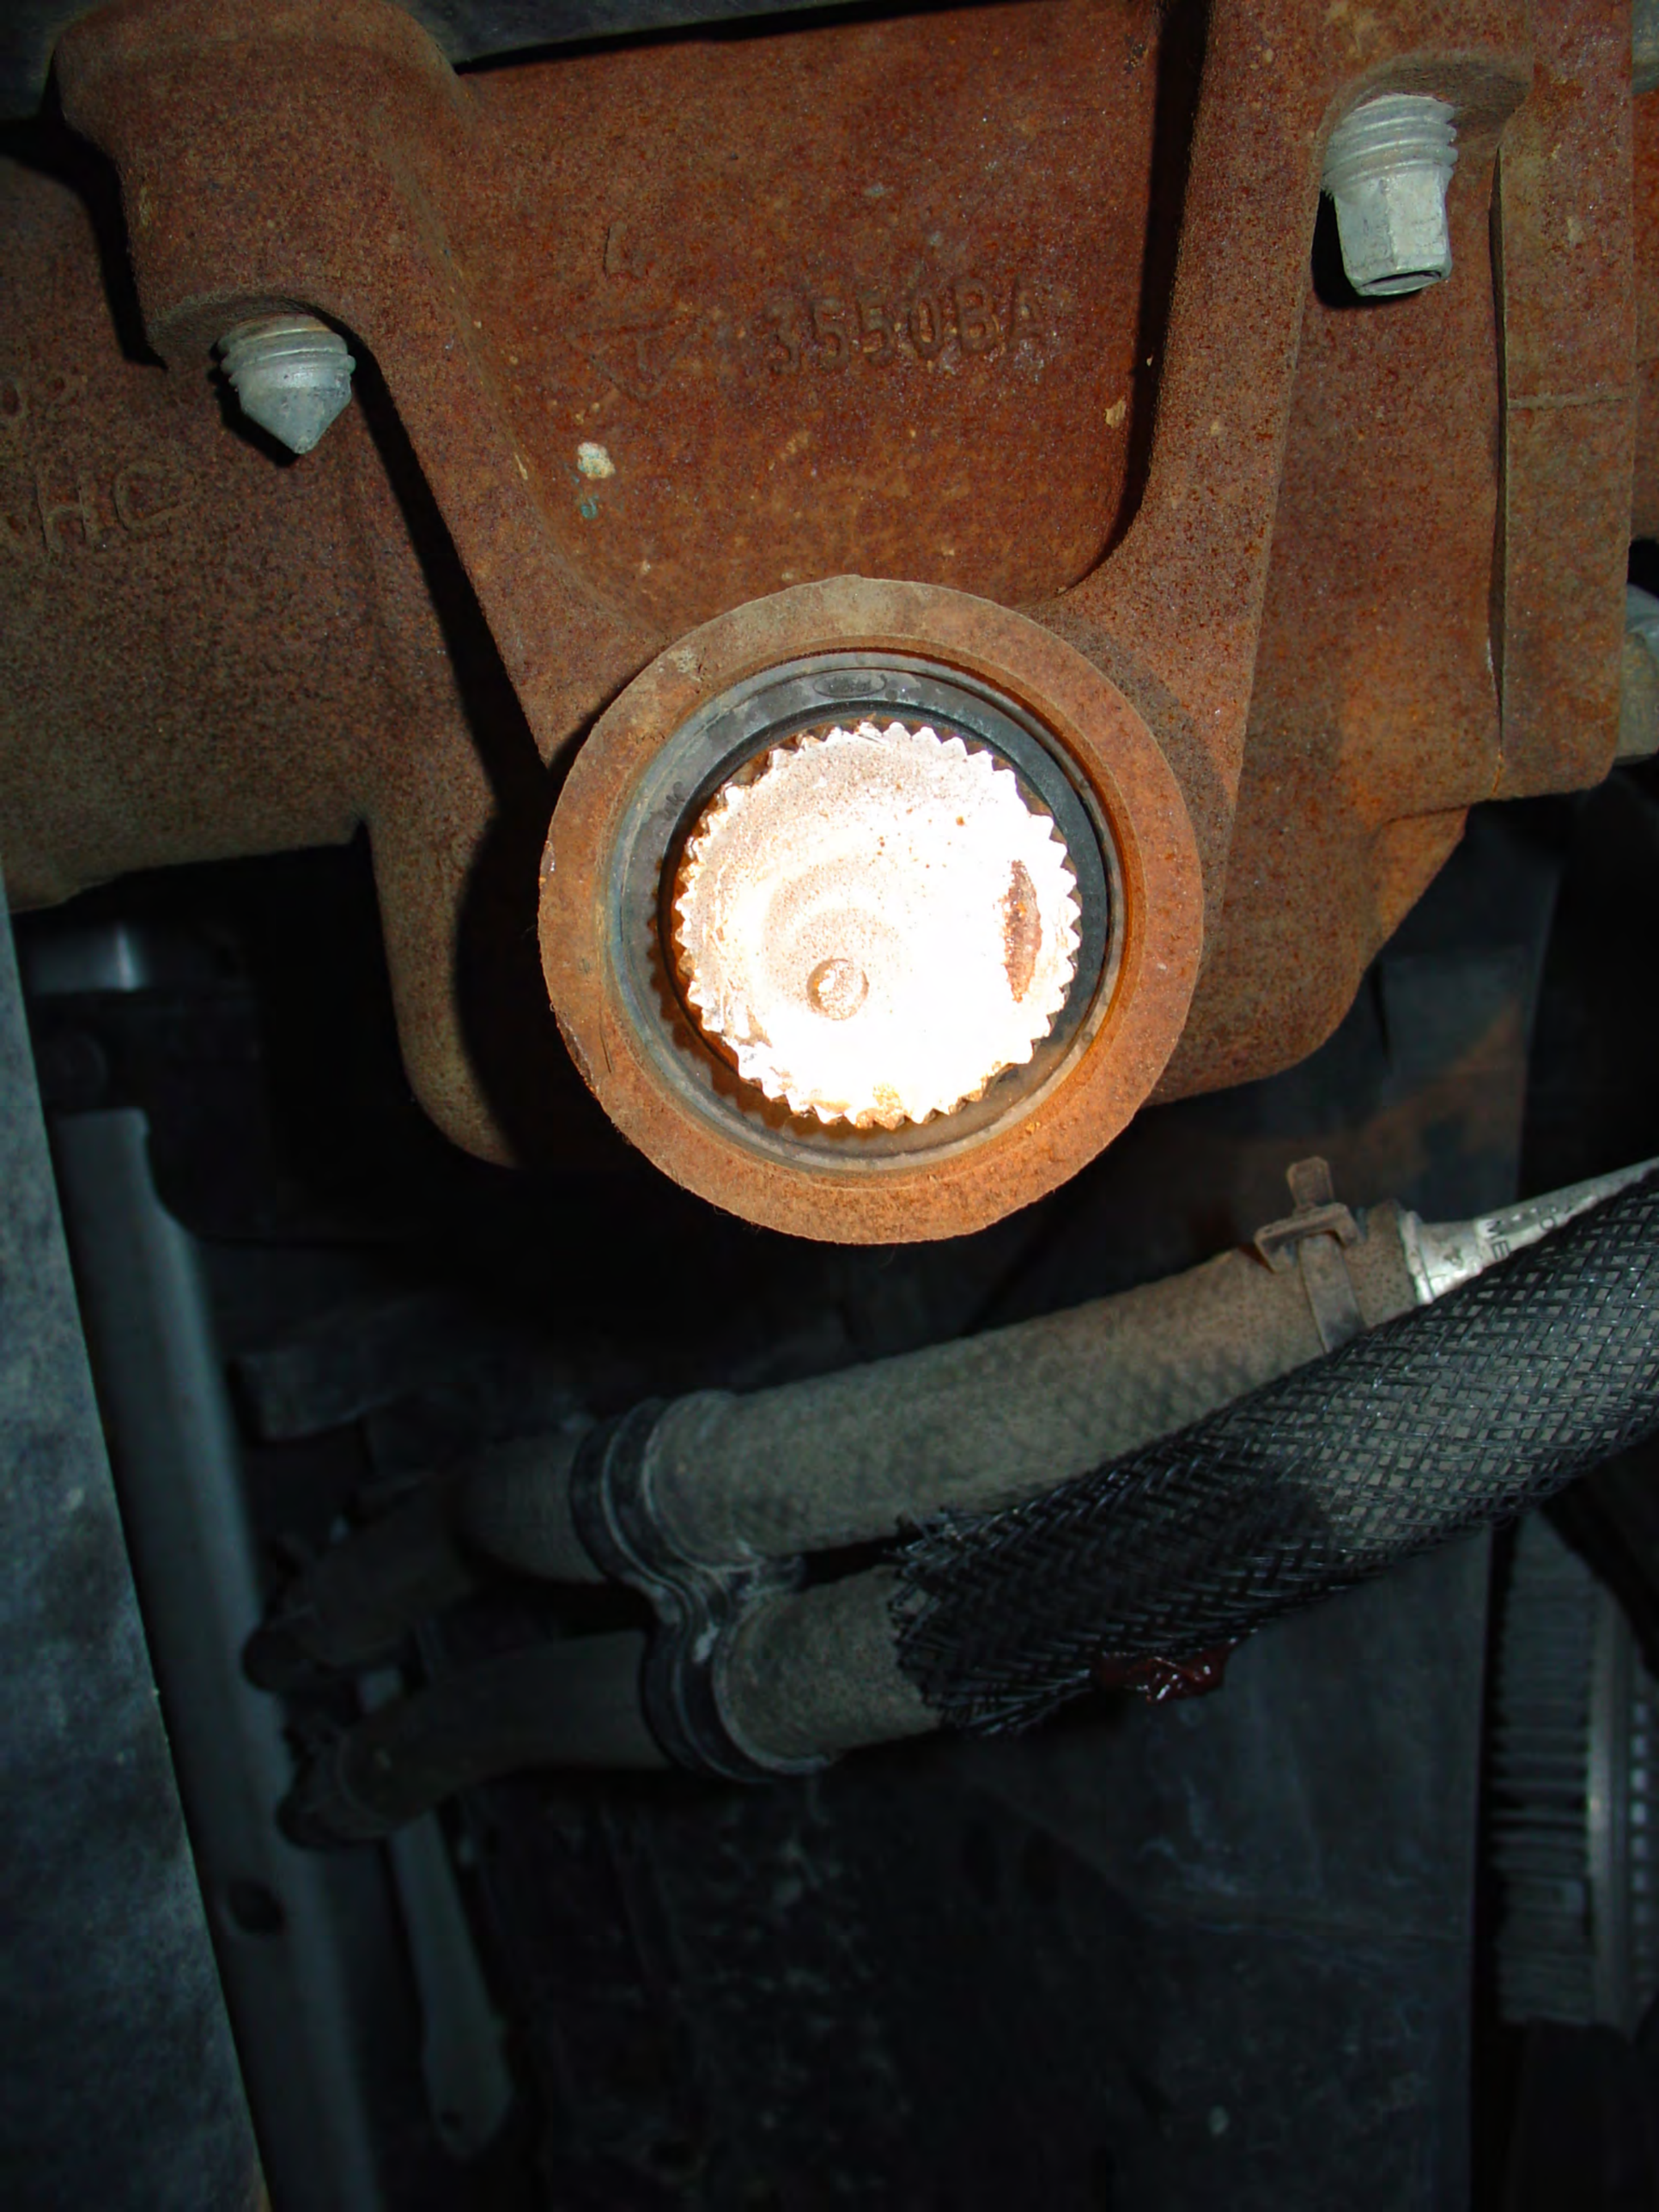


355 0 BA



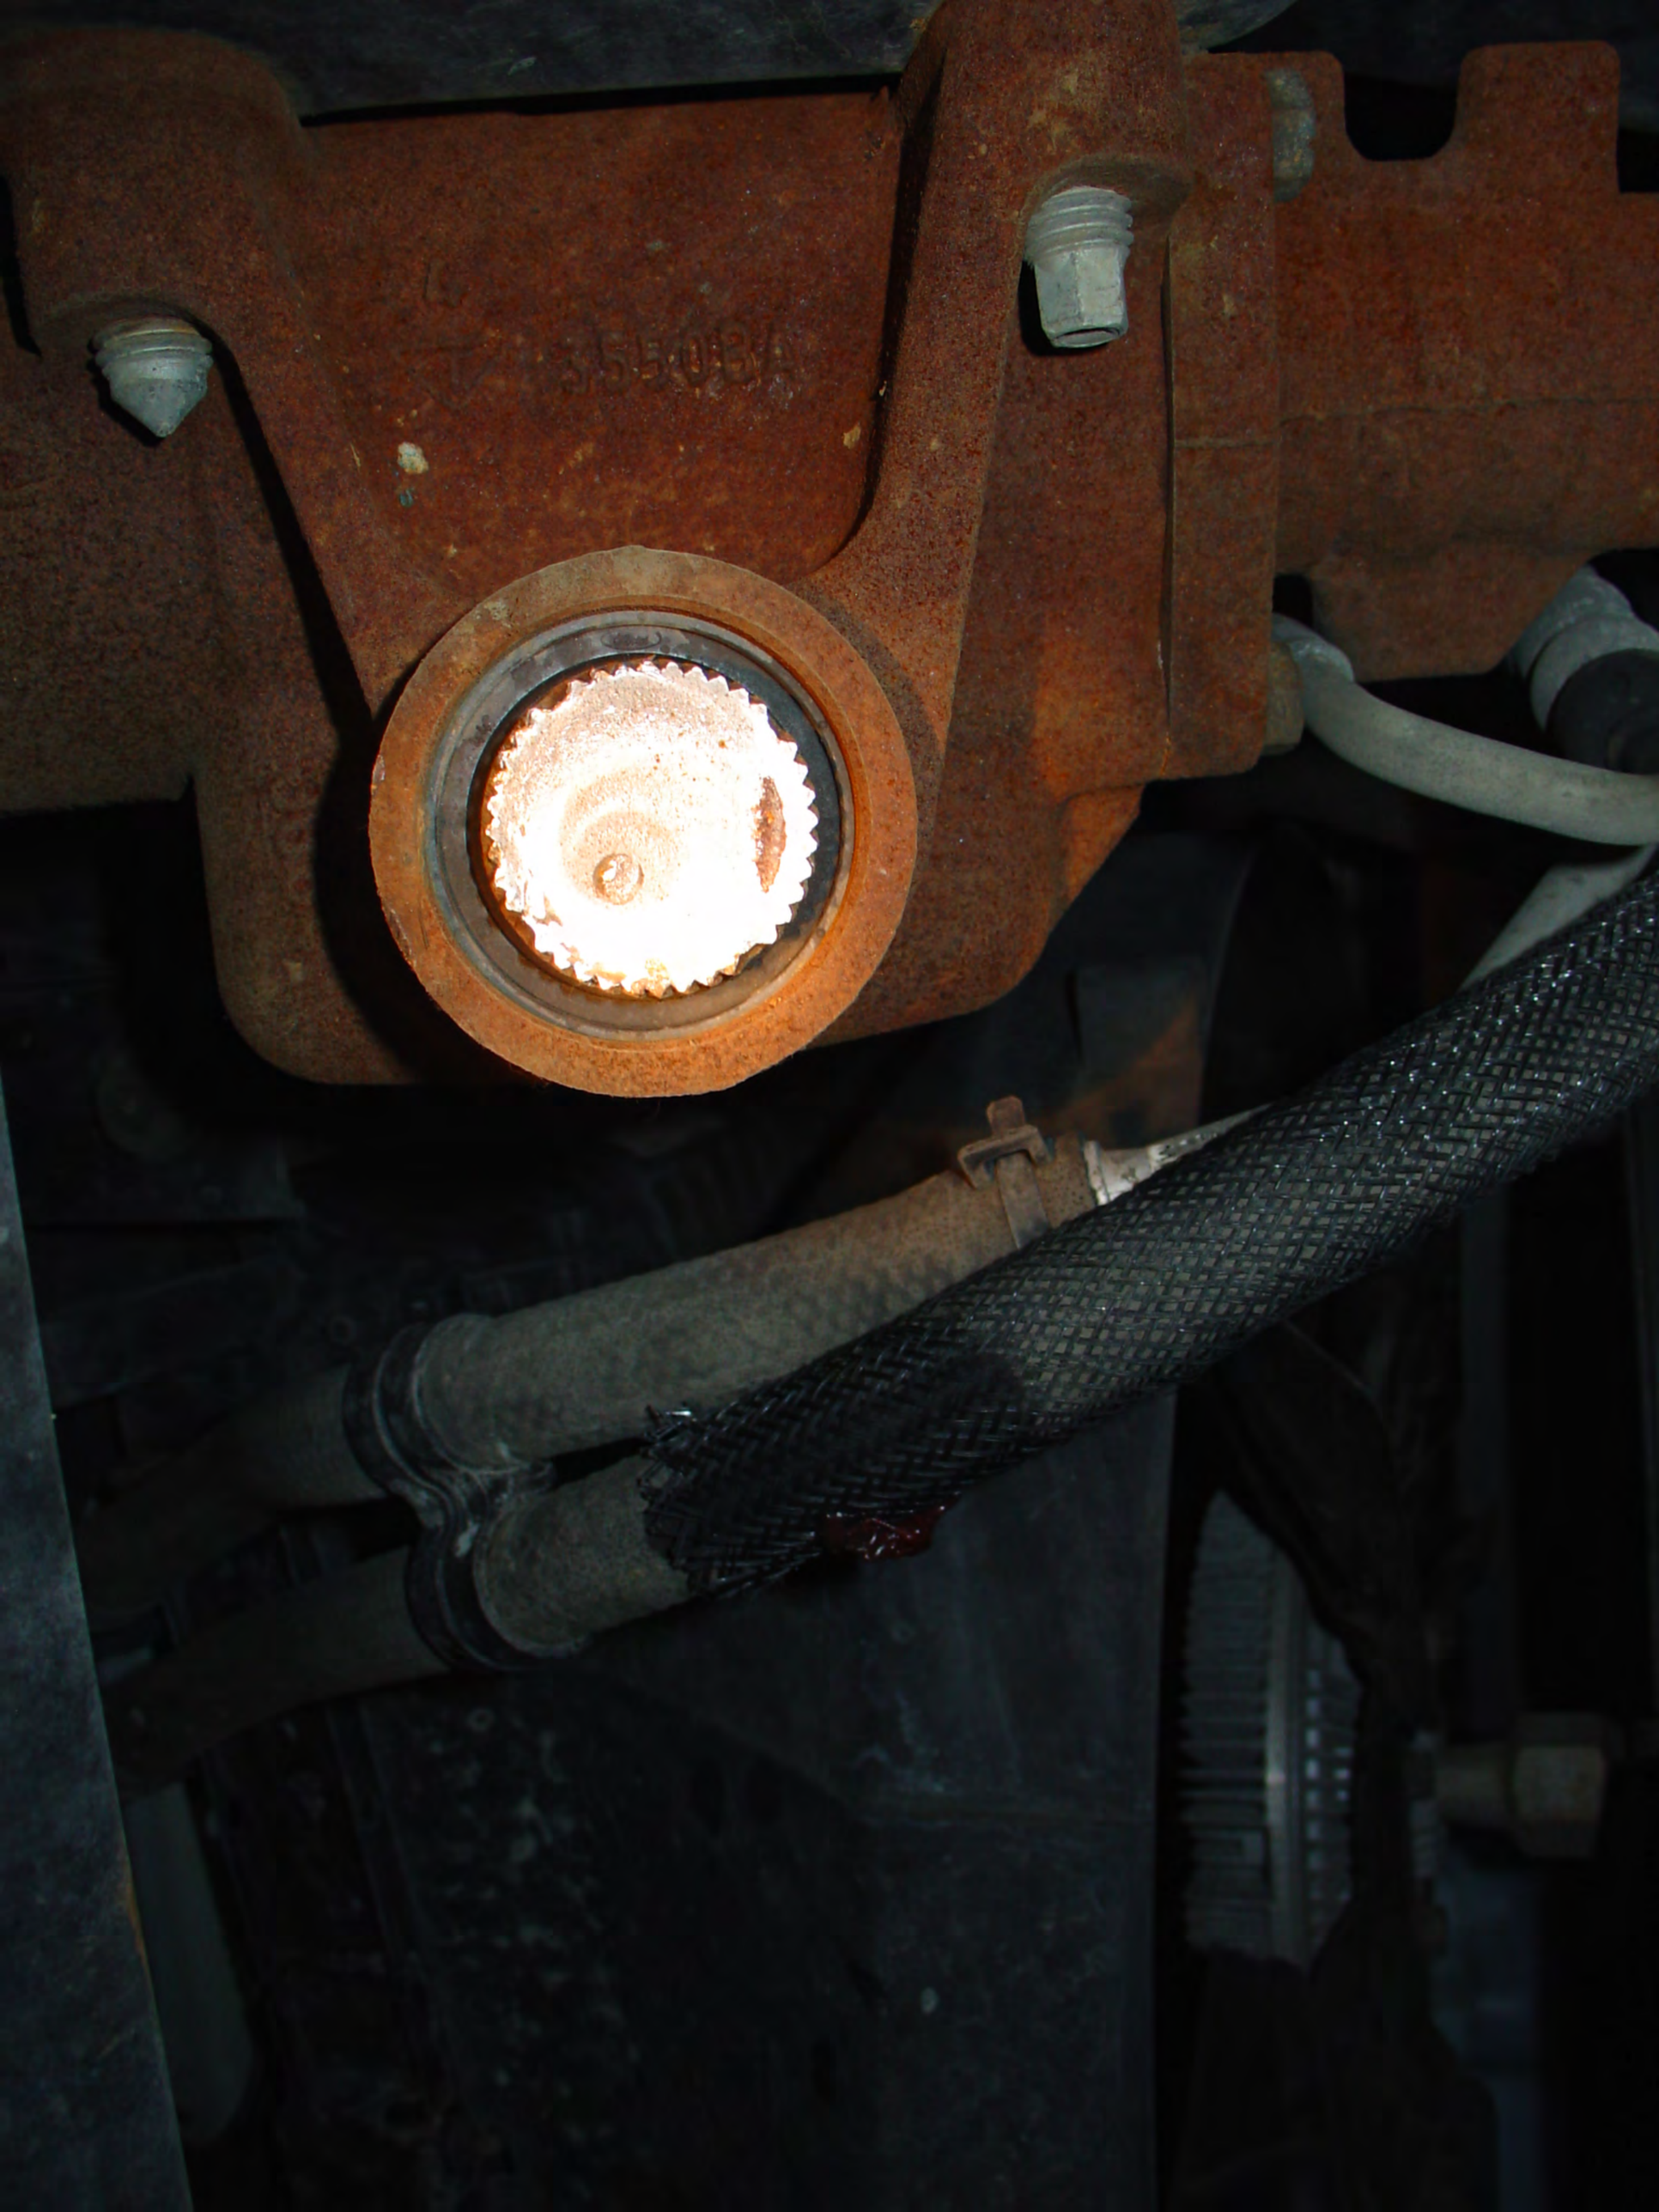



















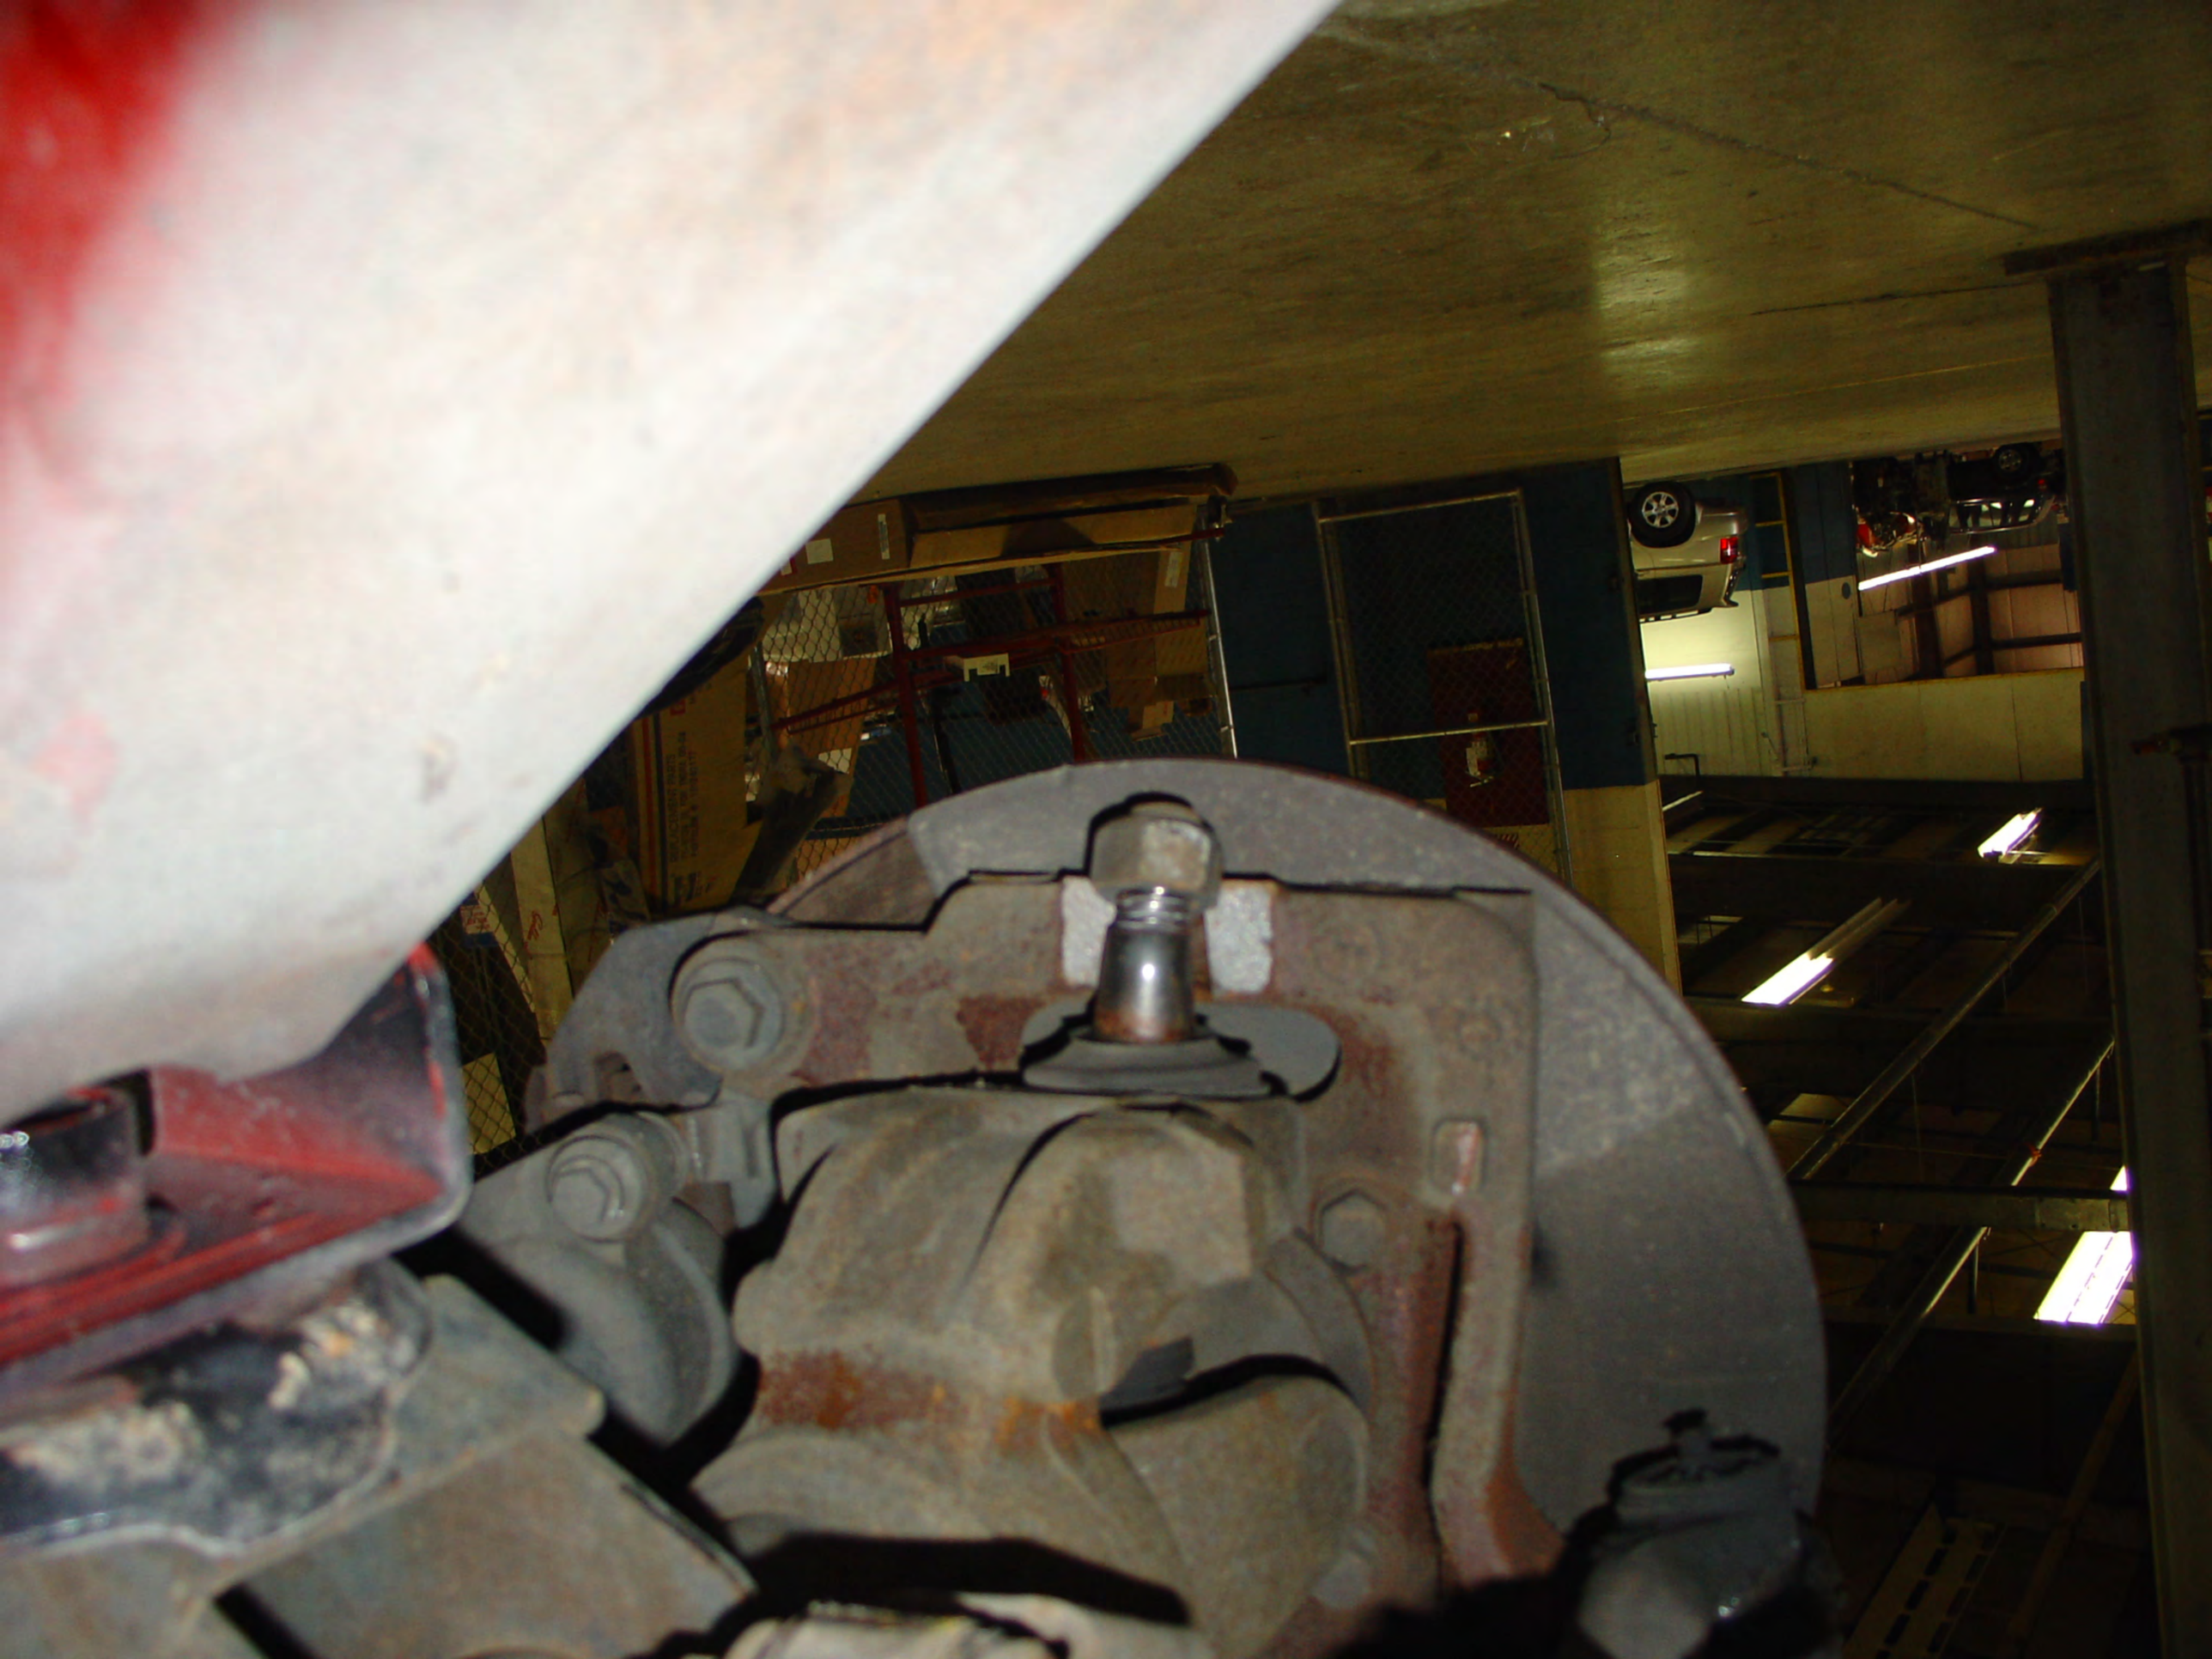

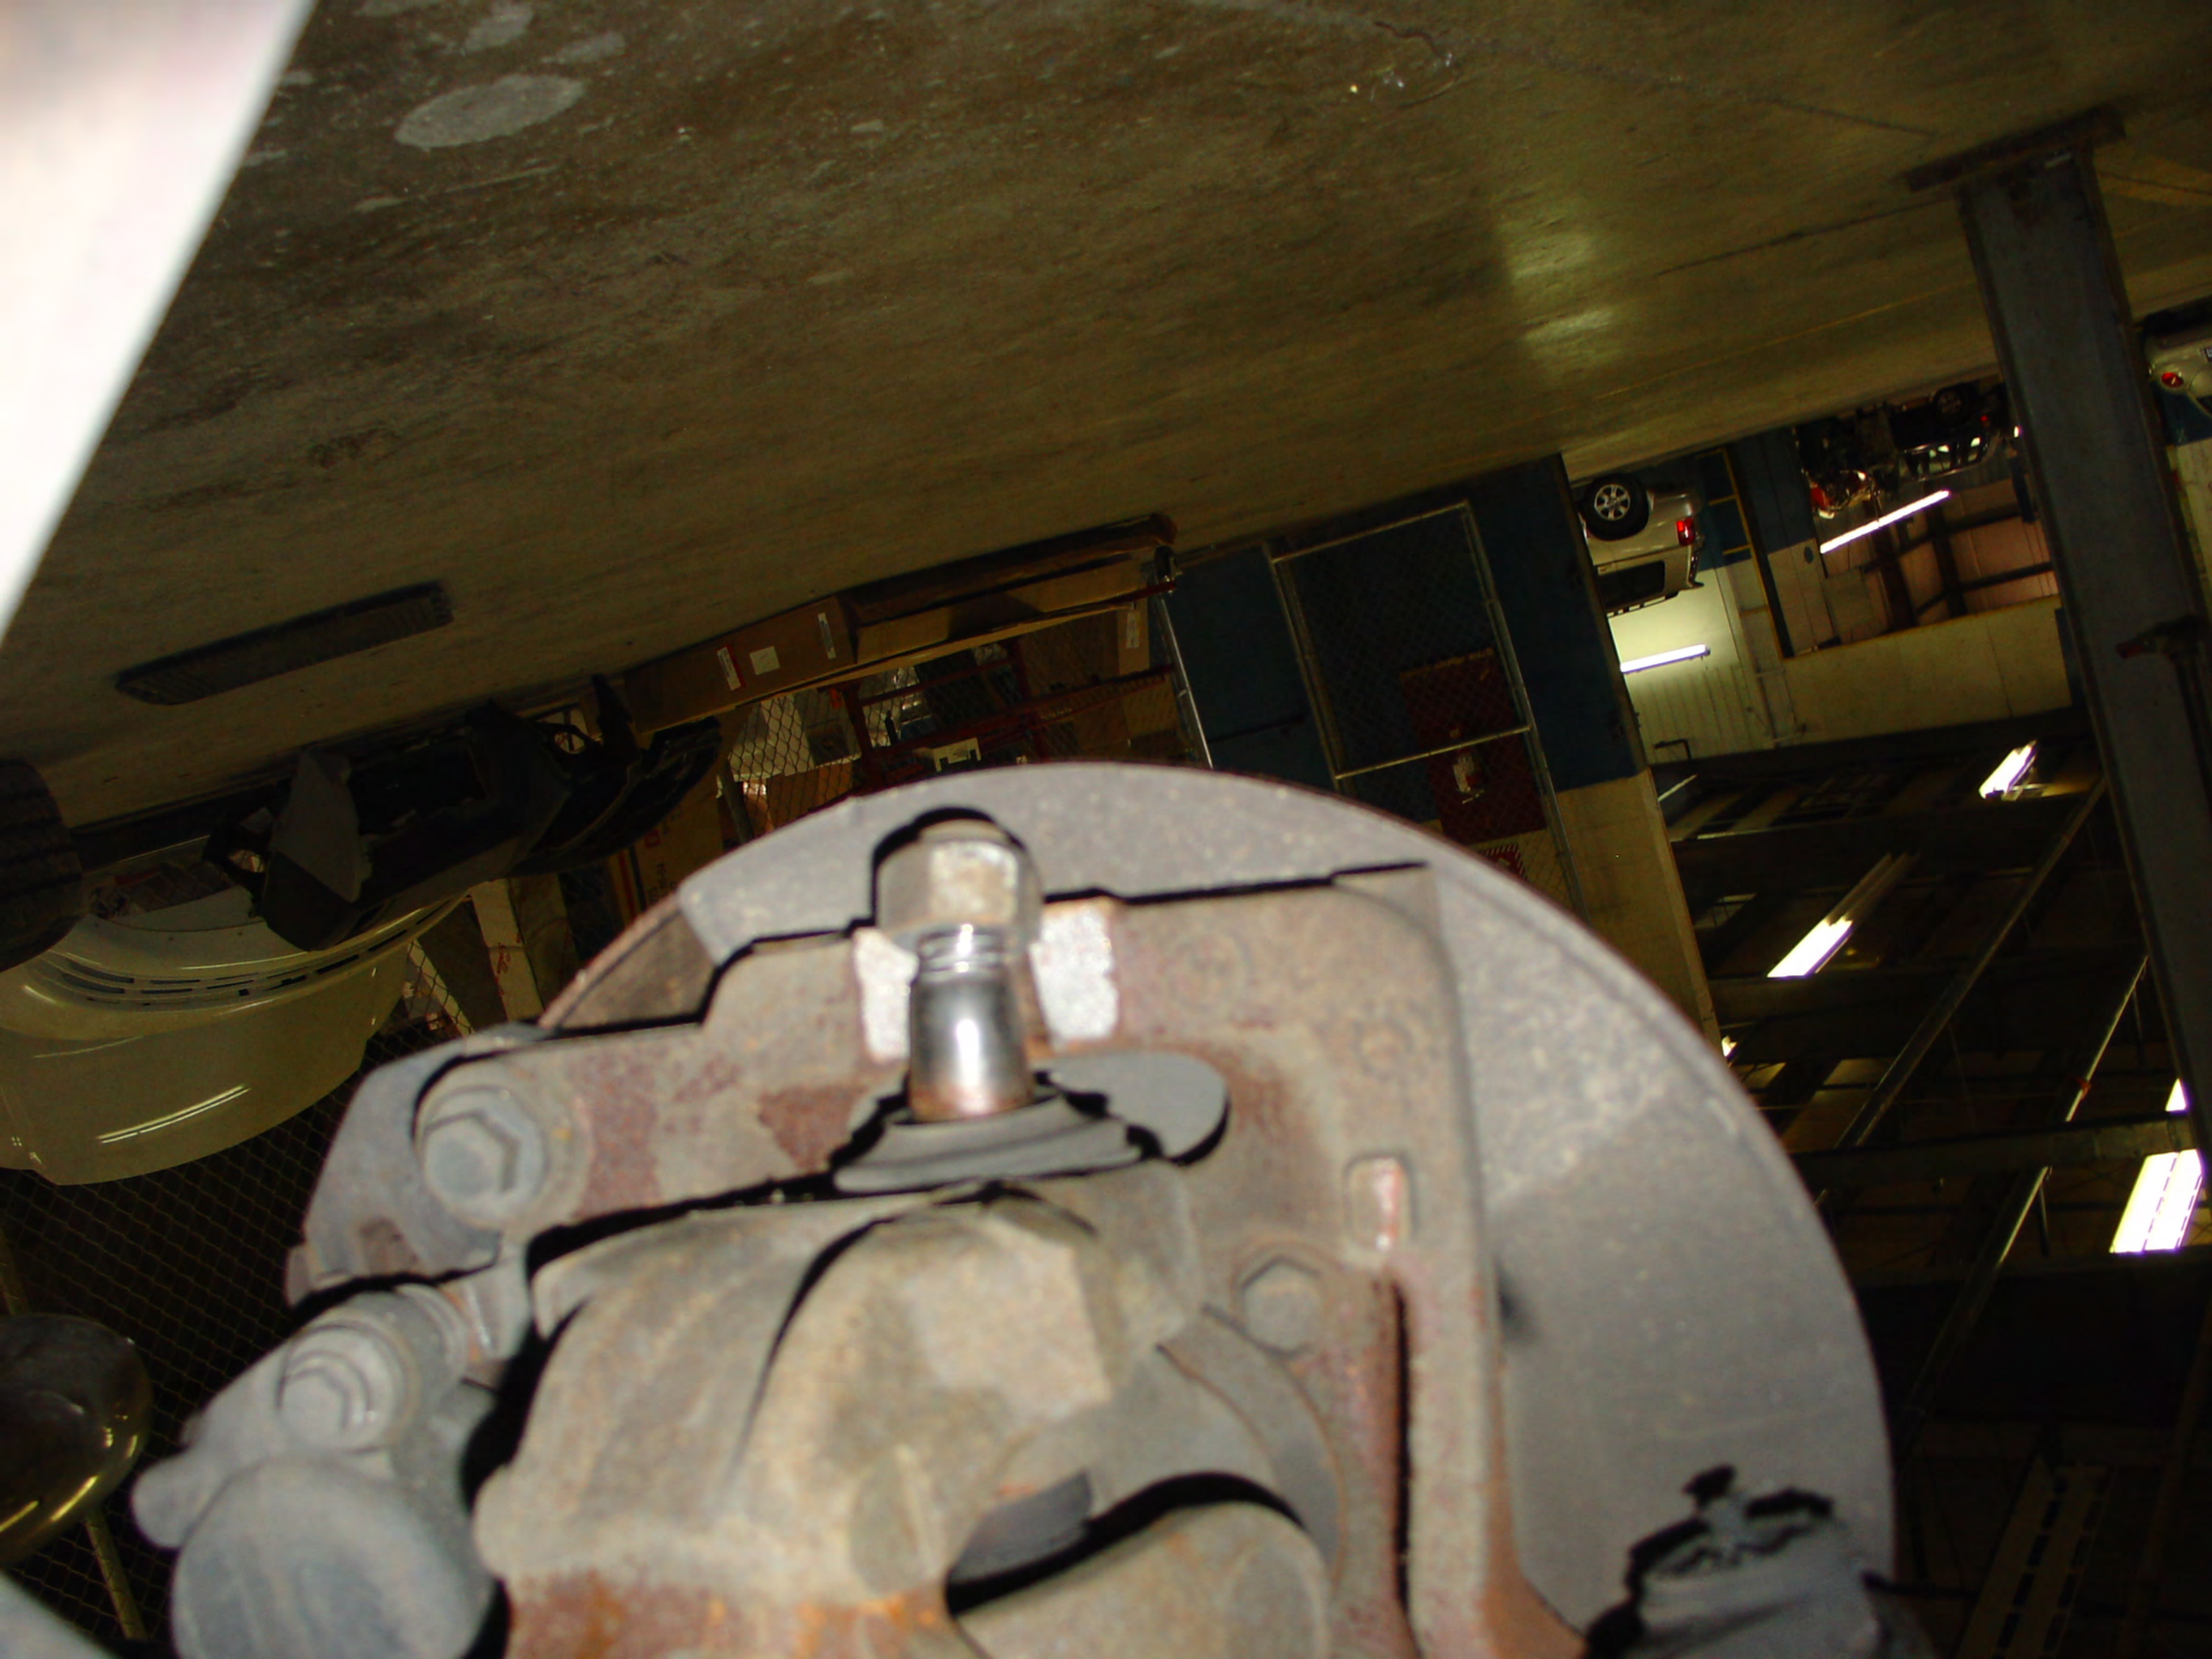












P265/70R17 121/118S
C697QA
BFGoodrich




DANGER






LTX®
DANGER
























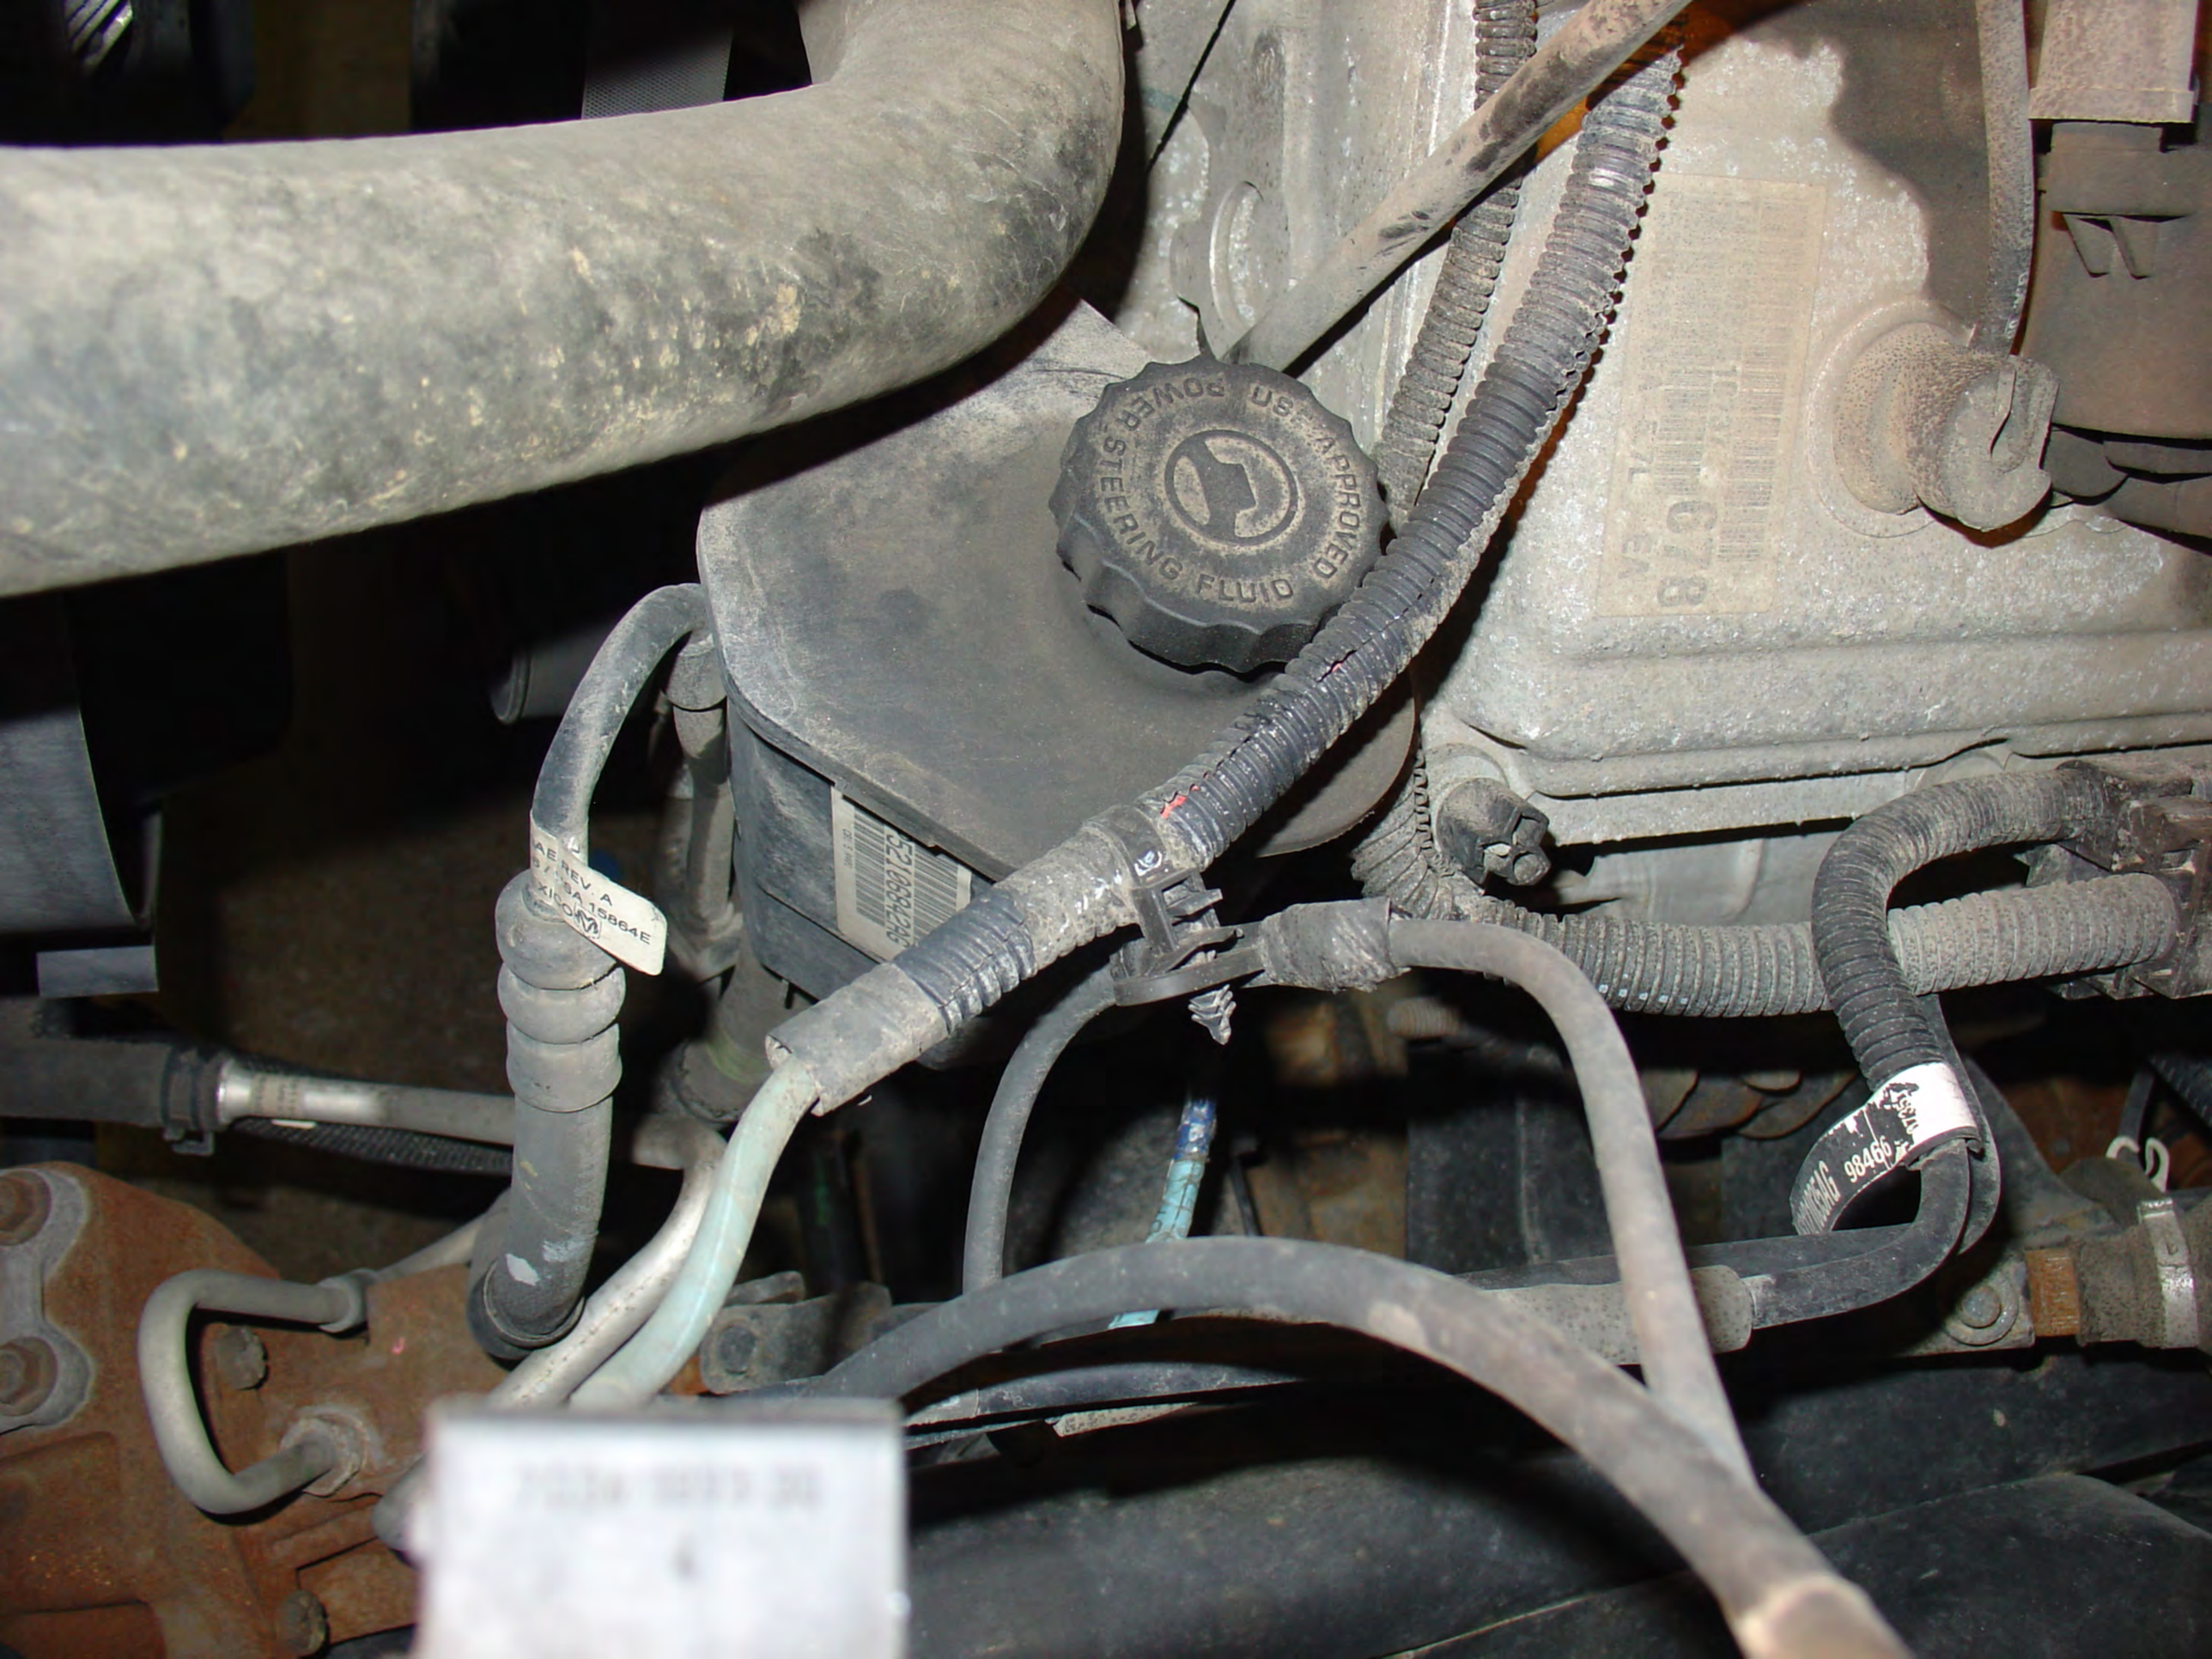


POWER STEERING FLUID
USE APPROVED



FULL
HOT
ADD

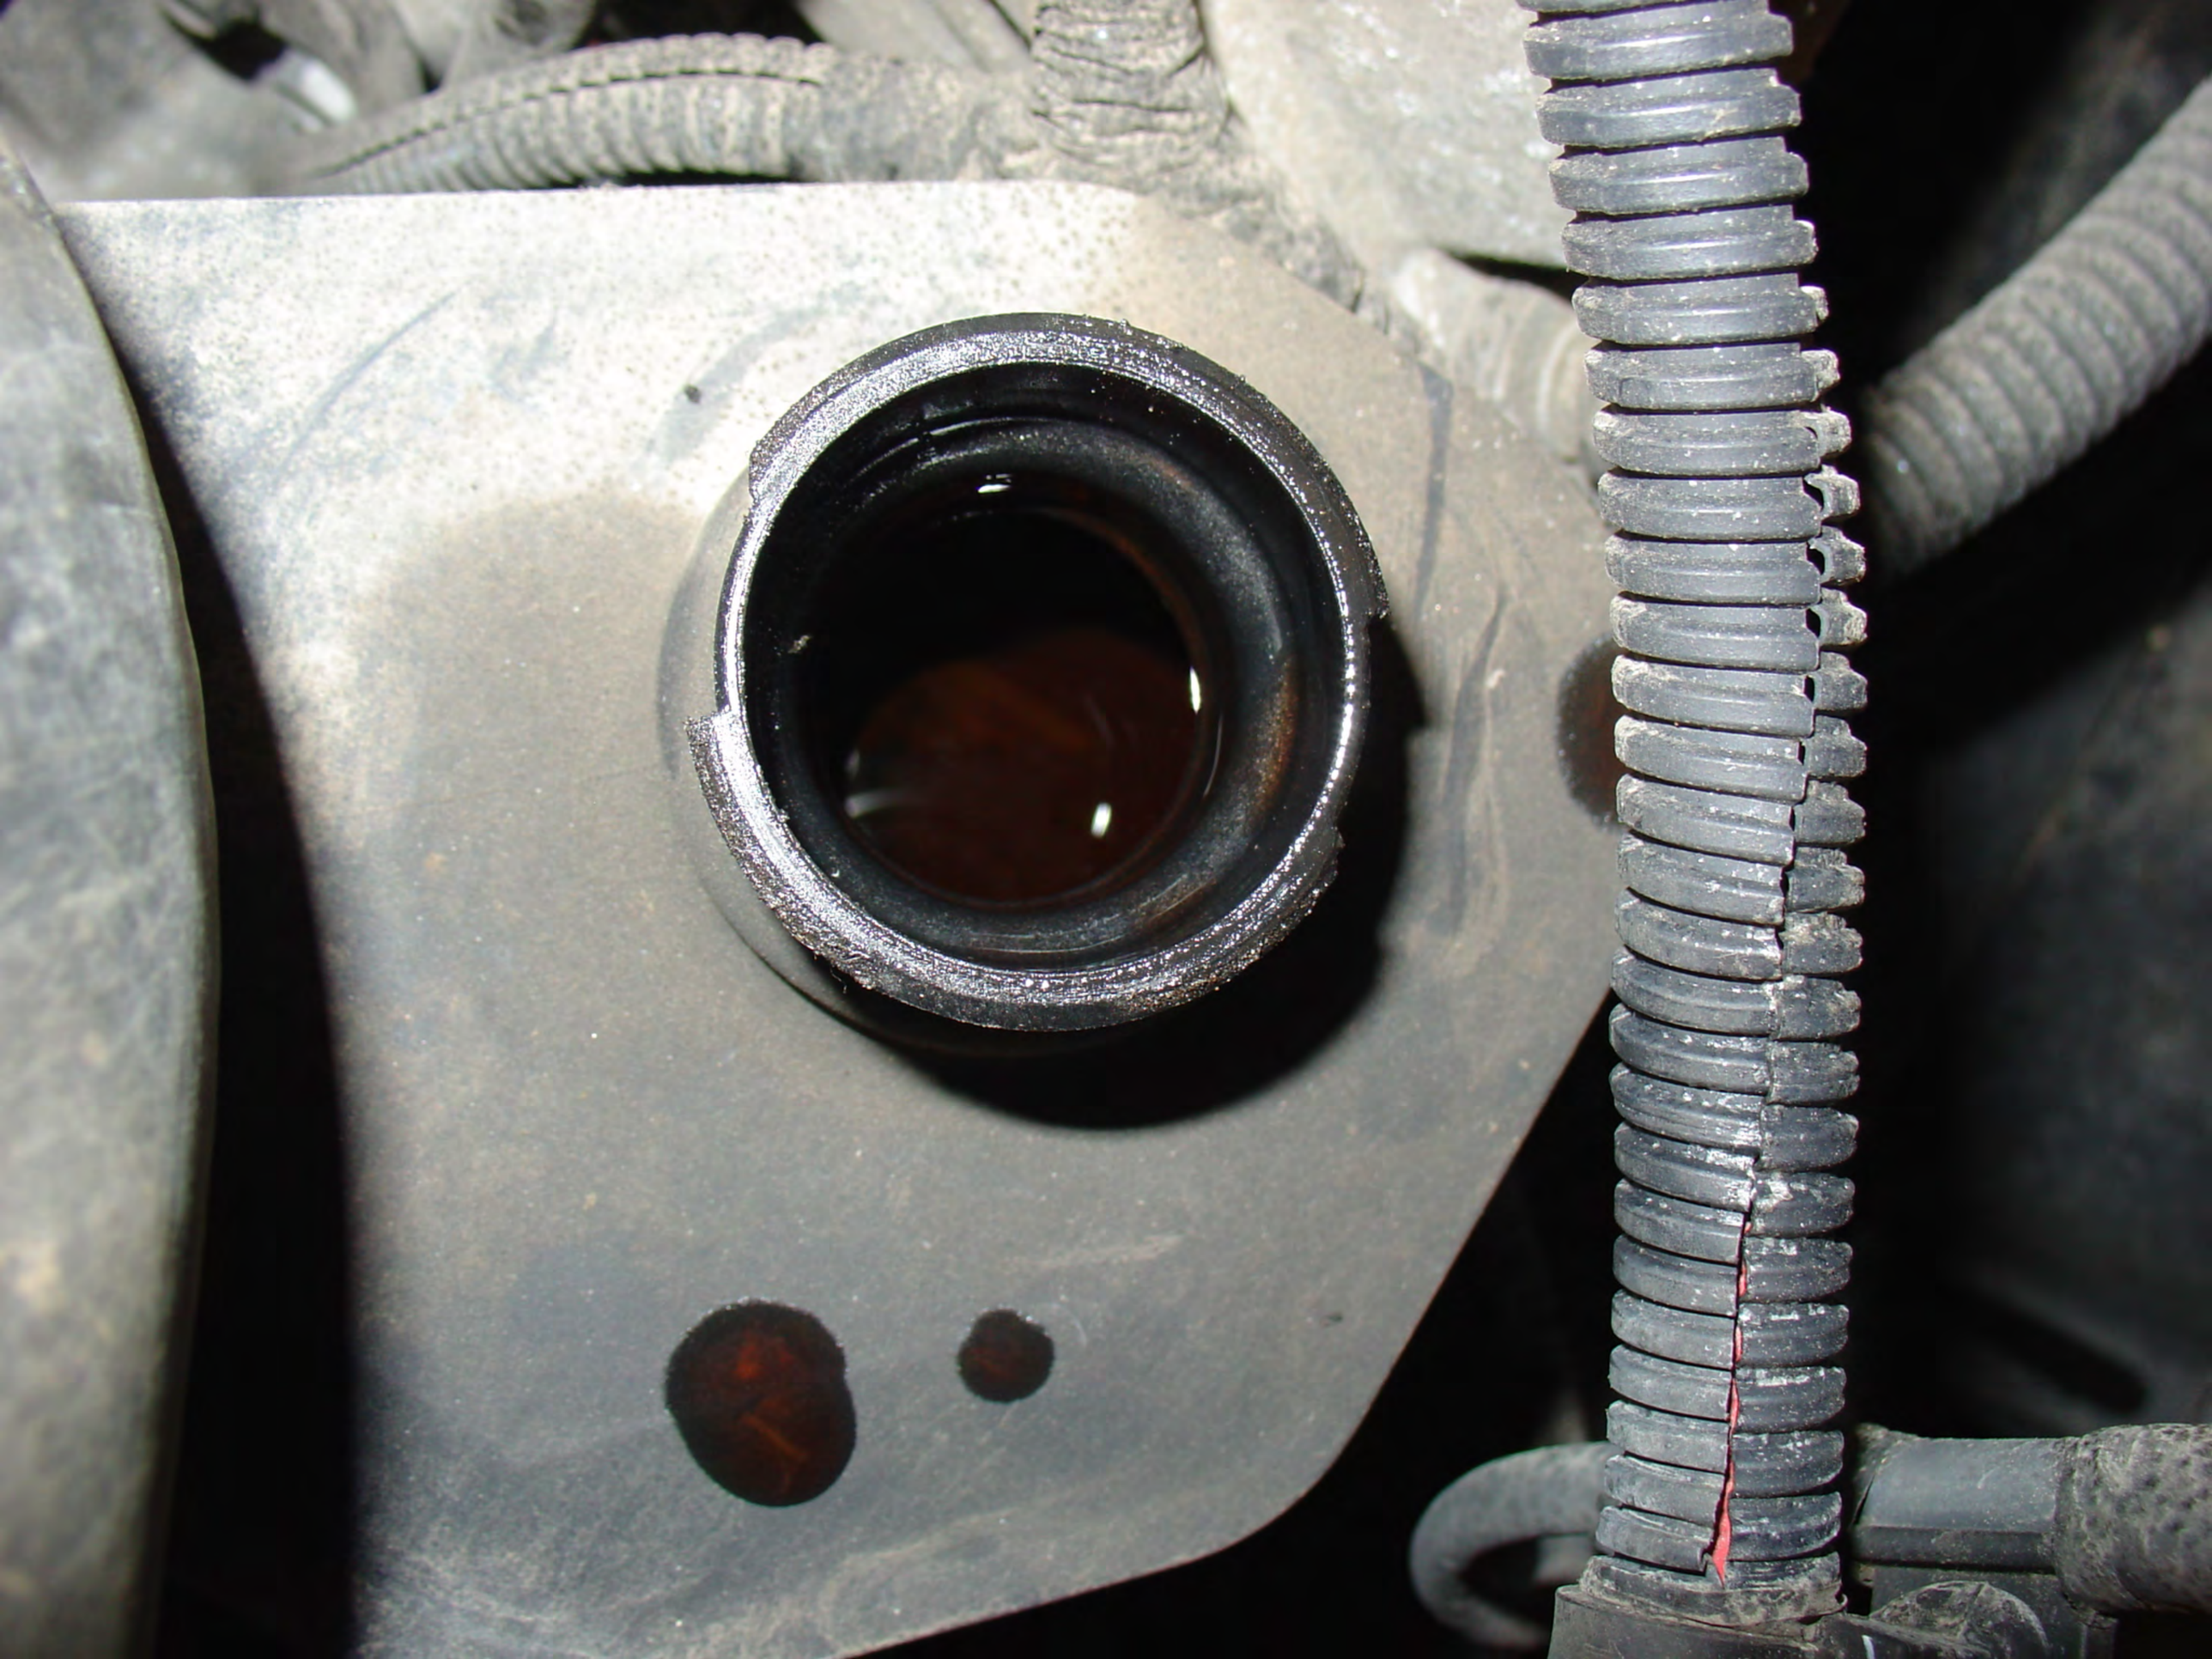

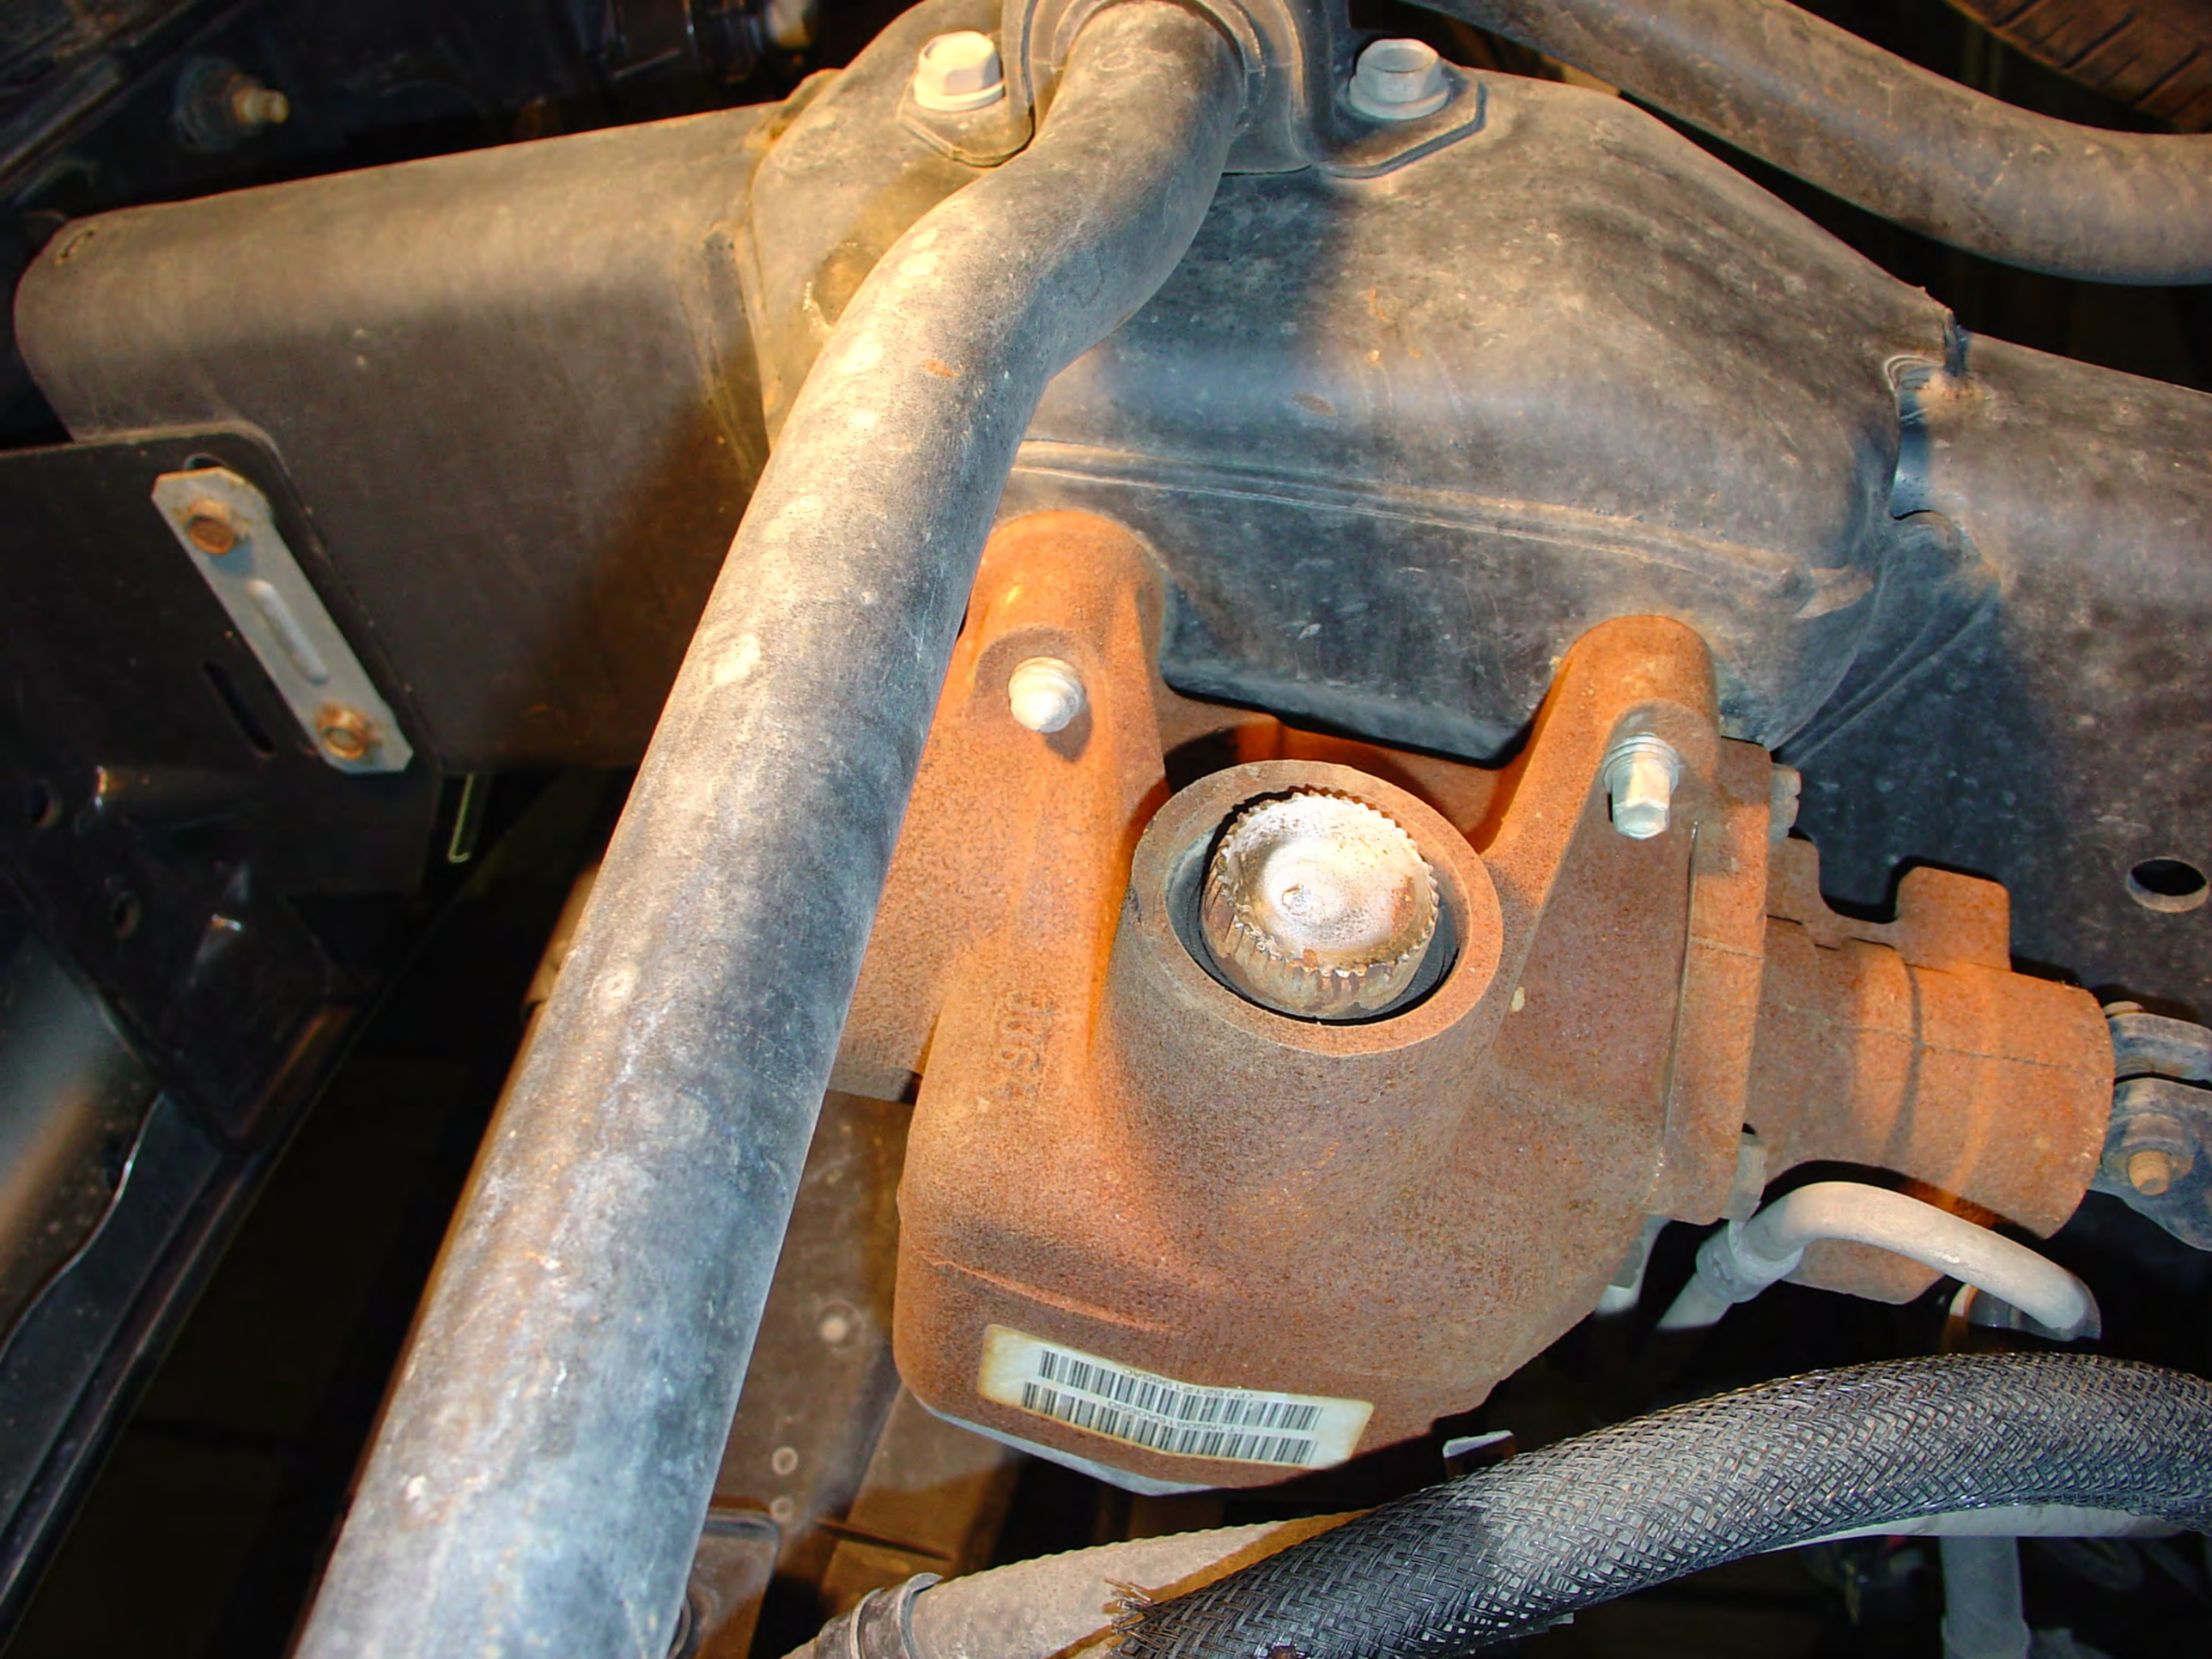


NG0815A0550
(P)52121986AC



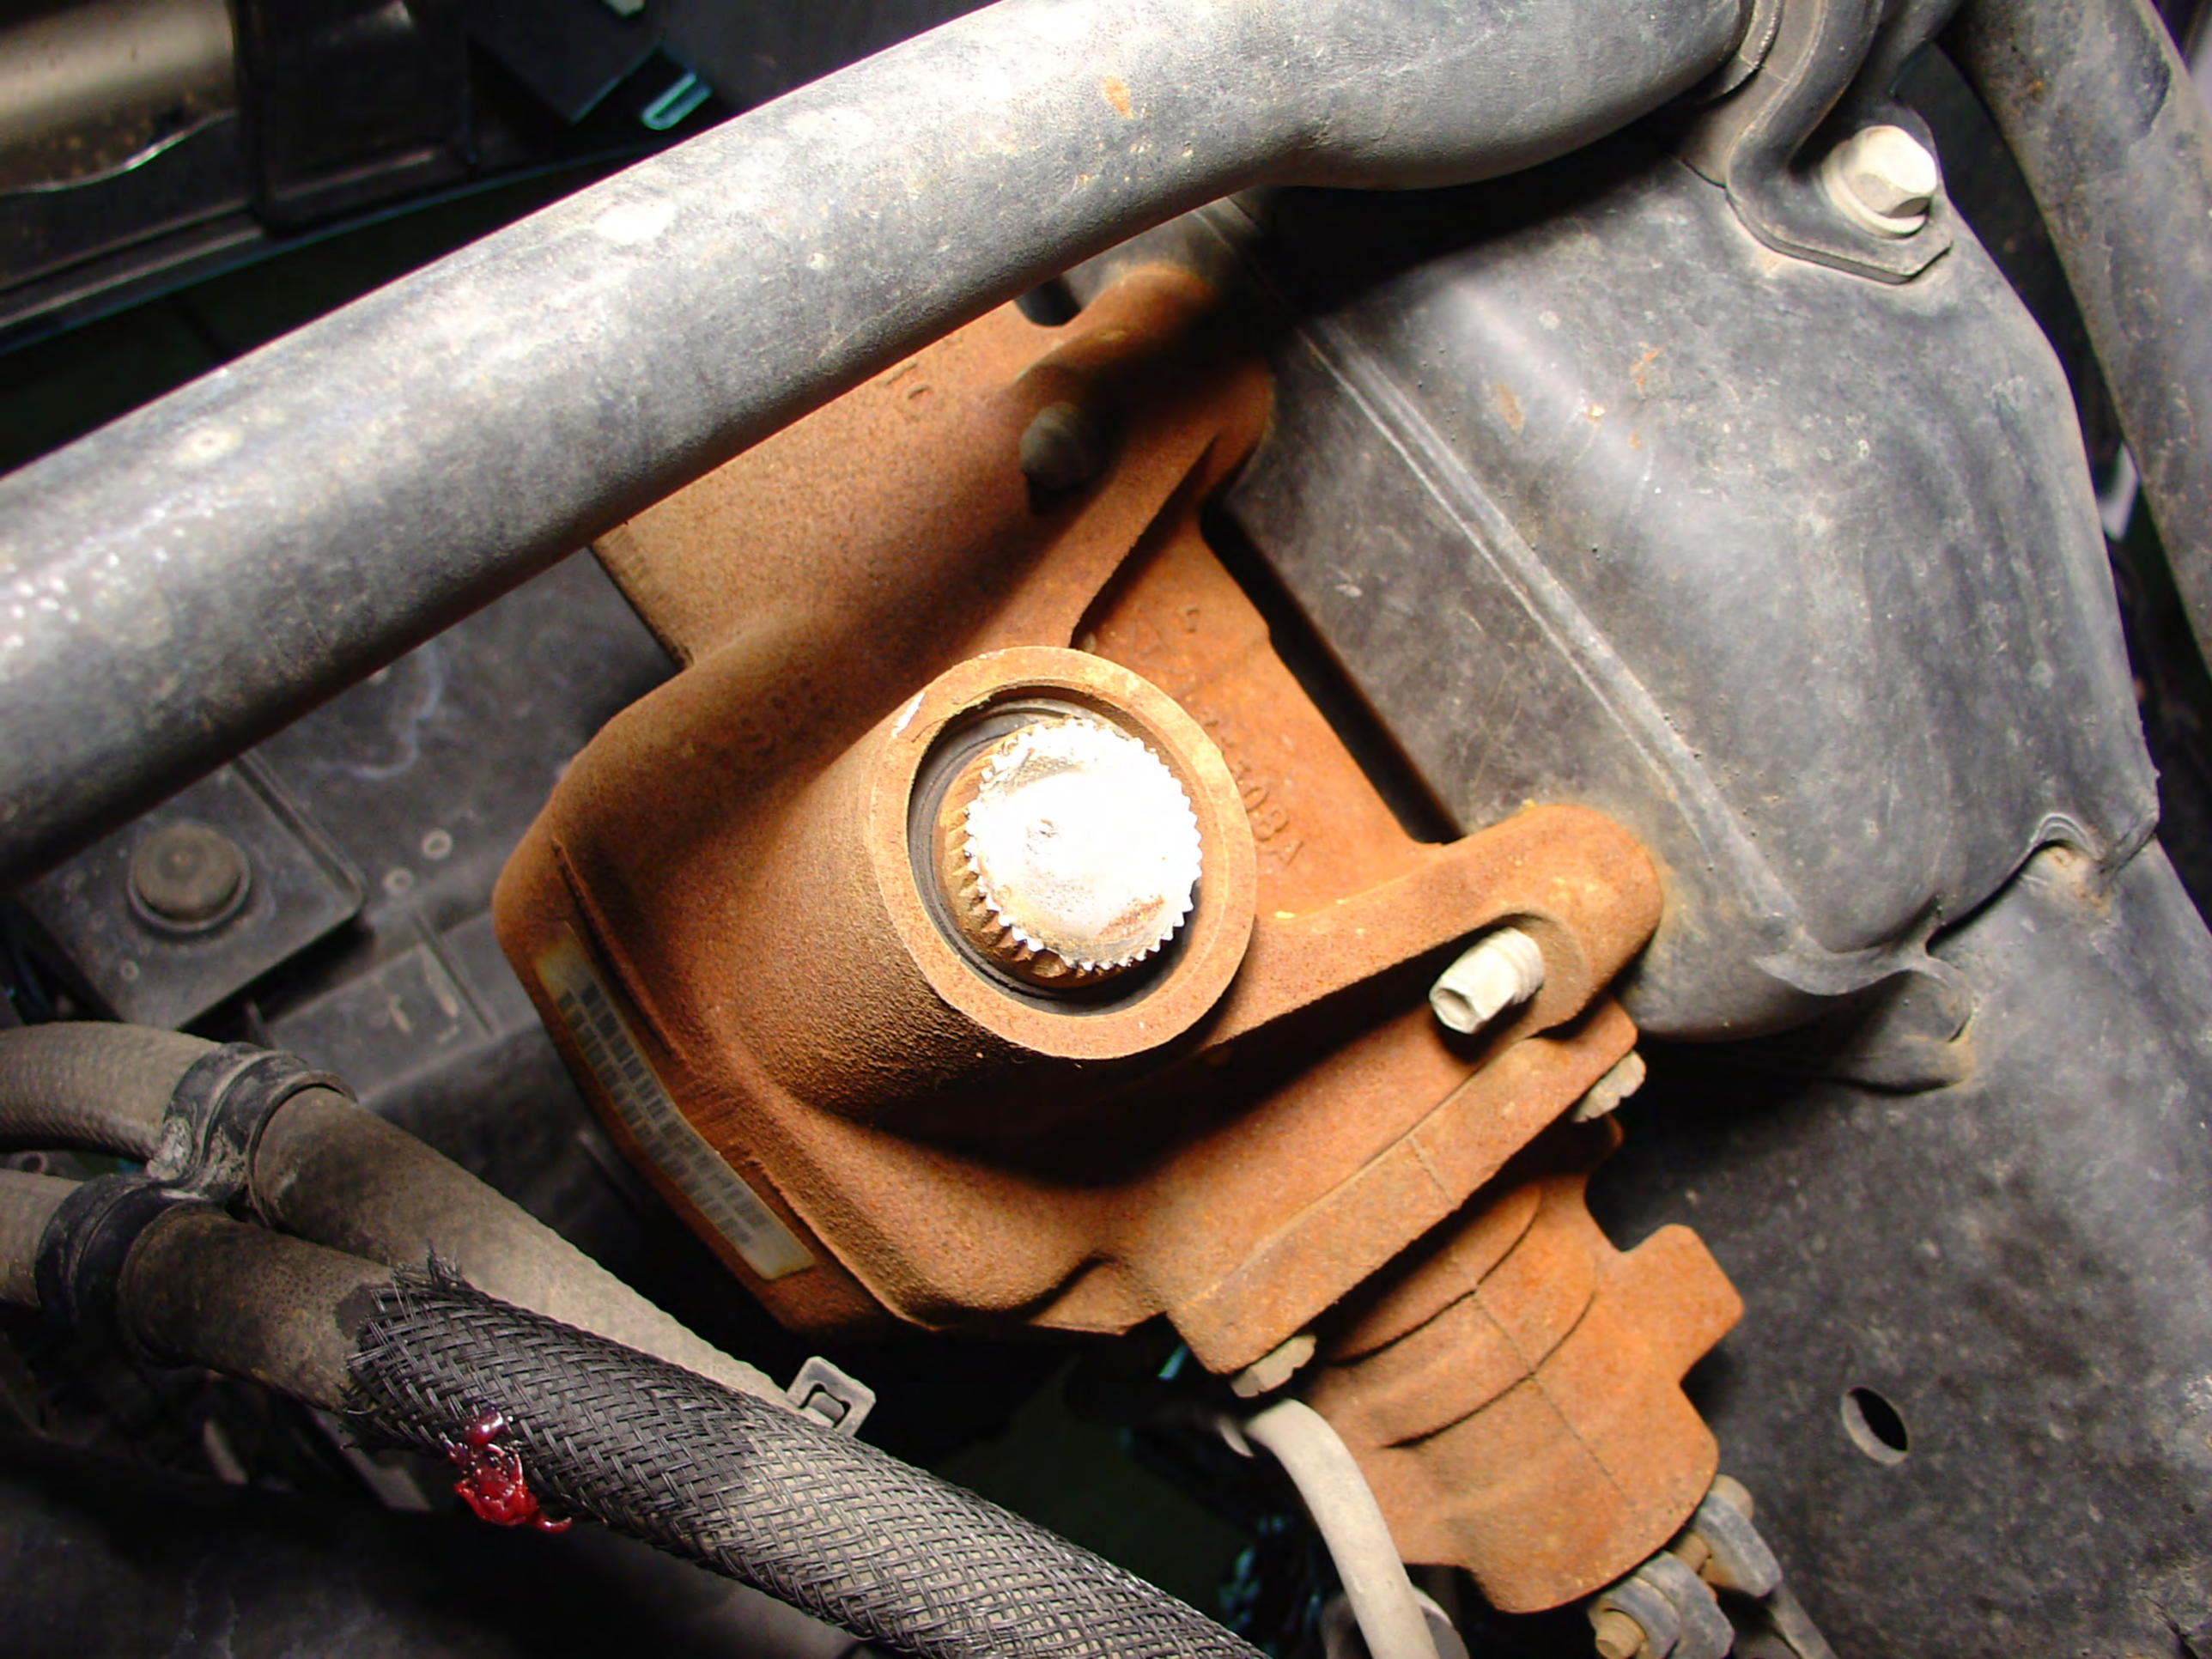


LT265/70R
MAX. LOAD SINGLE
MAX. LOAD DUAL
COLD
COLD
RADIAL
MICHELIN








PULL
AWA
Diamond
SNOWPLOWS
NING:


156
OCT 10


TURBO DIESEL
DISCOVERER STT


TURBO DIESEL


OCT 10
EXIT
AUTOMOTIVE LIFTS & MACHINERY CORP.
ALM
CAUTION
WARNING
RAM


NOTICE
DISCOVERER STT
GOODYEAR




4X4




TURBO DIESEL
DISCOVERER STT


SUNOCO
MODE
MENU
SELECT
danburyauto.com
Thank You
RESUME • ACCEL
CANCEL
DECEL
RPM X 1000
MPH
CARGO
DOME
OFF
POWER
S1
S2
S3
pepsi


BRAKE


PRESS



[redacted]

Were you greeted promptly?
Were you treated courteously?
Was your job finished when pro
Was our work satisfactory?
Was our service worth the price?
What else could we offer you at Dan
doing your automotive business elsew

Name
HELP US IMPROVE OUR SERVI
PLEASE HELP
TO HELP YO

make
take
let us know how

CHRYSL
Jeep
Dodge
danburyauto.com

Thank You

NOTICE




1X4902


PRESS








8
14
18
E
F
DIESEL ONLY
0
1
2
3
4
5
RPM X1000
58571
0
10
20
30
40
50
60
70
80
90
100
110
120
MPH km/h
PRND21


RPM X 1000
58571
ONLY
F


1
0
4
5
RPM X 1000
58571

MFD BY DAIMLERCHRYSLER CORPORATION

DATE OF MFR 9-04

GAWR FRONT 2359 KG(5200 LB) WITH TIRES LT265/70R17E

GAWR REAR 2727 KG(6010 LB) WITH TIRES LT265/70R17E

RIMS AT 17X8.0

RIMS AT 17X8.0

GVWR 4083 KG(09000 LB)

COLD 410 KPA(60 PSI)

COLD 485 KPA(70 PSI)

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

VIN: 3D7KS28C55G [redacted]

TYPE: TRUCK

SINGLE X DUAL


MDH: 093013

PNT:PR4

VEHICLE MADE IN MEXICO

TRM:N9DV

4648507

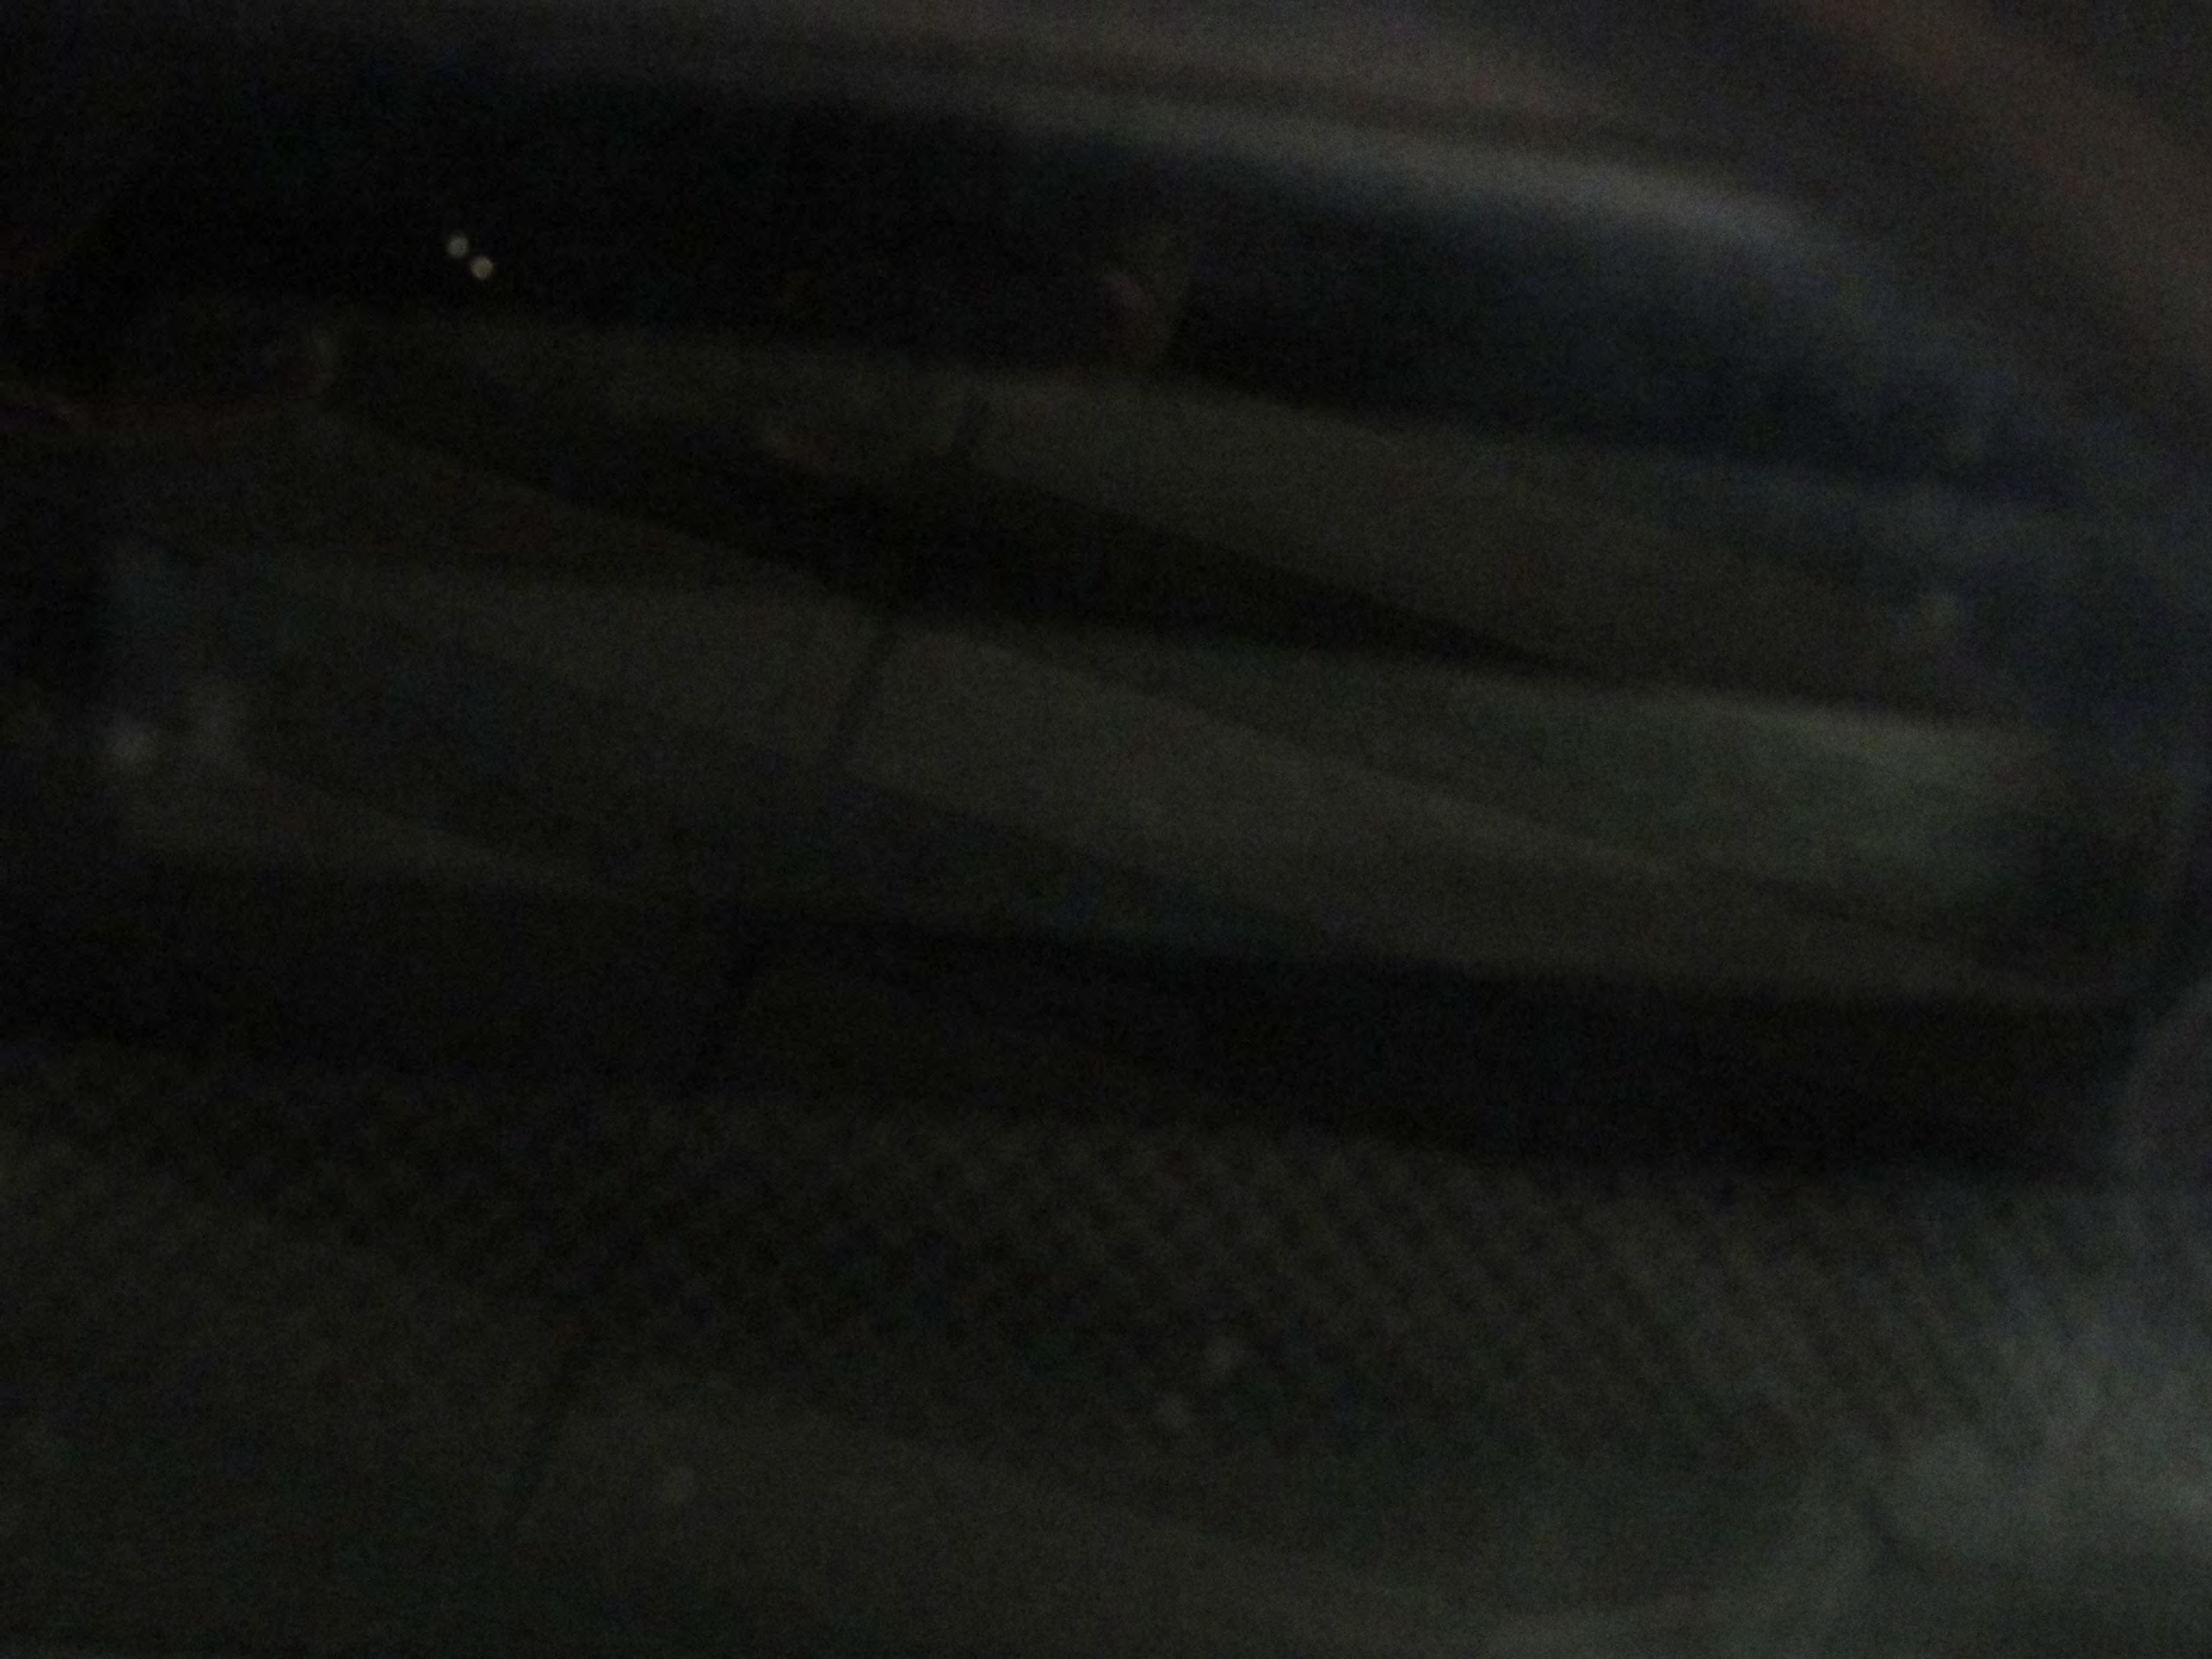






SRS
AIRBAG






PRESS


Professional
GEAR









ENGINE OIL


WASHER
FLUID ONLY


DIESEL ENGINE OIL
SEE OWNERS MANUAL
TURBO DIESEL

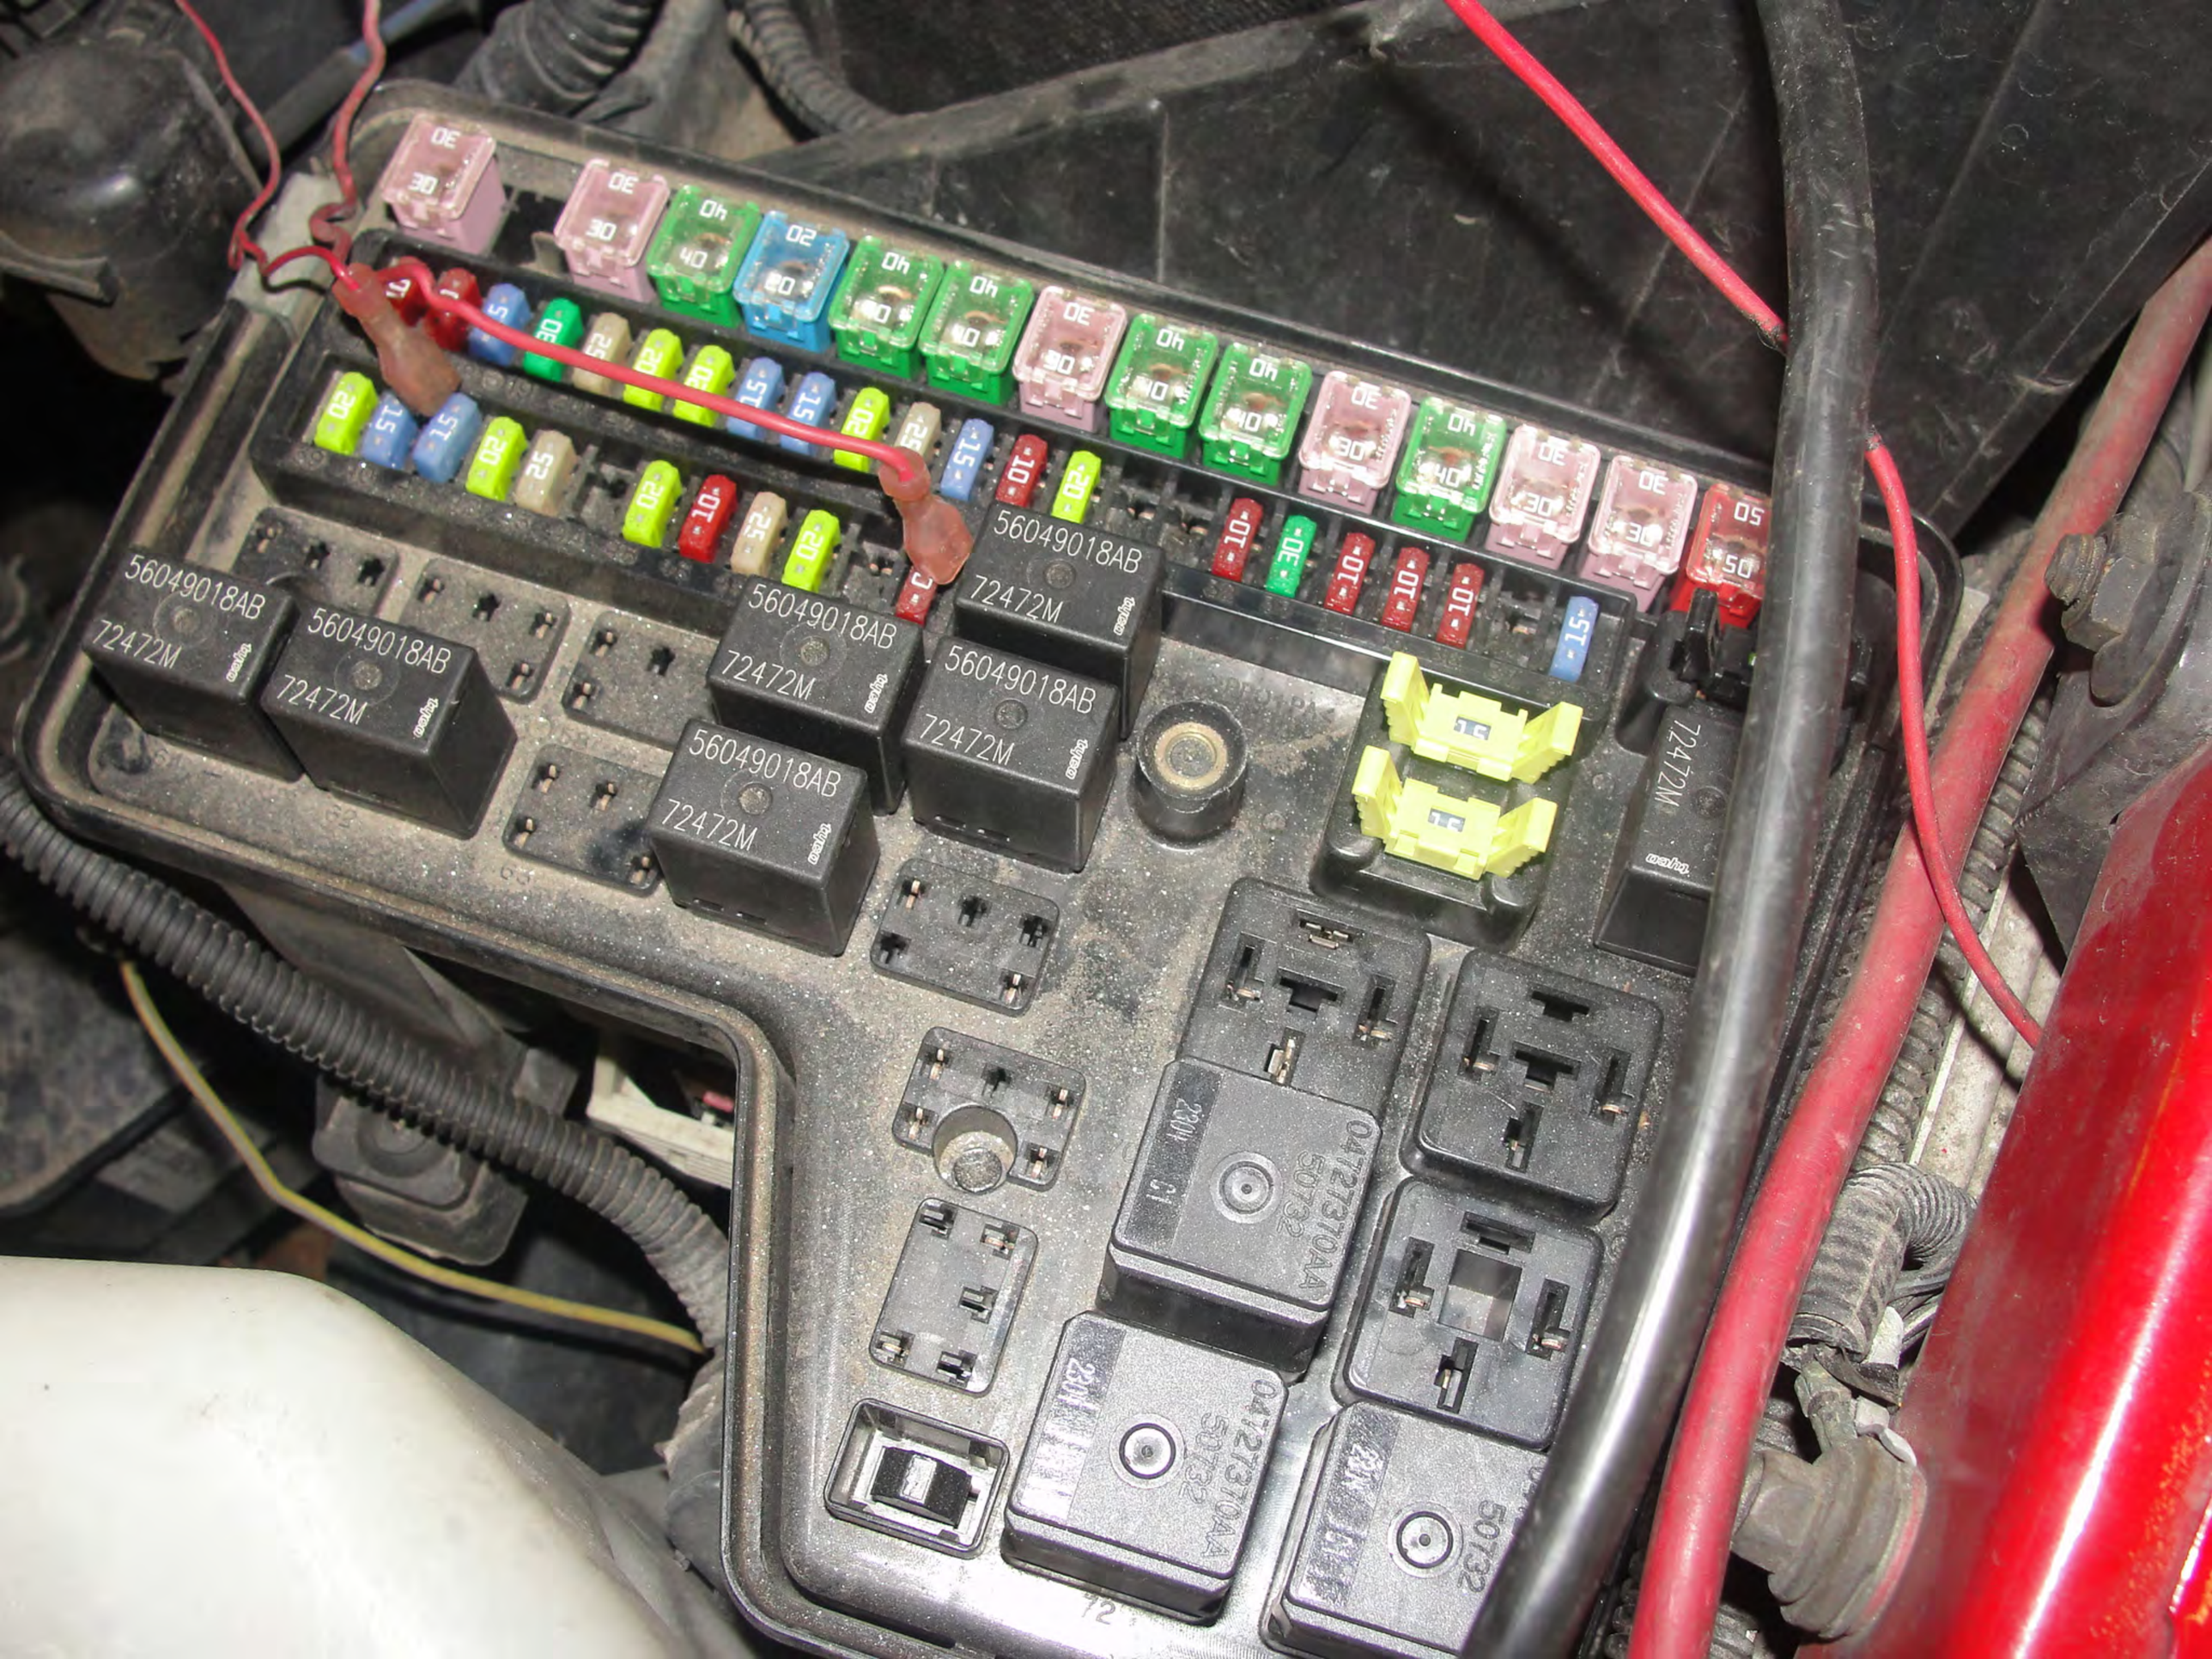
56049018AB
72472M
mecha.
0172710AA
5013Z
30
40
20
10
15
25
50


USE APPROVED
POWER STEERING FLUID


290920


mopar

VOLTS: 12 VDC
MAX. AMPS LOW BEAM 10
MAX. AMPS COMMON 15
MAX. AMPS HIGH BEAM 15
MAX. AMPS PARK LAMP 5
MAX. AMPS TURN LAMP 5

07347

Meyer®

IMPORTANT INFORMATION

If lights do not function a fuse inside the Module may have failed. To determine the cause of such failure check all OEM, external wire connections, DRL lights, auxiliary lights and fuses. Repair the identified cause of failure and then replace module. Additional lights connected to the Nite Saber light system voids all warranties.

A B C


DISCOVERER STT
COOPER


TURBO DIESEL
COOPER
DISCOVERER STT


DISCOVERER STT
COOPER


DISCOVERER STT
COOPER

MRS LT 26/7 ORIZ

MOUNT ONLY ON 12 INCH RIM

DOT UTAH CWK 3710

47818-1

R-31745

.2.0

MICRO

57




M+S




USA










COOPER




MICHELIN



NO DTCs DETECTED

Page back to exit

NO DTCs DETECTED

Page back to exit

NO DTCs DETECTED

Page back to exit


2D7MS48C55


4X4
HEAVY DUTY
4X4






m 3500












HEAST

MFD BY DAIMLERCHRYSLER CORPORATION

DATE OF MFR 2-05

GVWR 5534 KG(12200 LB)

GAWR FRONT	WITH TIRES	RIMS AT	COLD
2359 KG(5200 LB)	LT235/80R17E	17X6.0	450 KPA(65 PSI)
GAWR REAR	WITH TIRES	RIMS AT	COLD
4242 KG(9350 LB)	LT235/80R17E	17X6.0	450 KPA(65 PSI)

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

VIN: 3D7MS48C55G[redacted] TYPE: TRUCK SINGLE DUAL X

MDH: 021511 PNT:PS2 VEHICLE MADE IN MEXICO TRM:V9DV 4648507






RAM 3500




80Z-N28











SUPPLEMENTAL TIRE PRESSURE INFORMATION

FOR LIGHT LOAD AND MAX LOAD CONDITIONS

LIGHT LOAD DEFINITION: 2 OCCUPANTS (150 LBS. EACH) PLUS 200 LBS. CARGO
MAX LOAD DEFINITION: AS DEFINED ON DRIVERS SIDE B – PILLAR PLACARD

	FRONT	REAR
LIGHT LOAD INFLATION PRESSURE (COLD)	410 kPa, 60 PSI	280 kPa, 40 PSI
MAX LOAD INFLATION PRESSURE (COLD)	450 kPa, 65 PSI	450 kPa, 65 PSI
TIRE SIZE	LT235/80R17E	LT235/80R17E

SEE OWNERS MANUAL FOR ADDITIONAL INFORMATION

5G797596











EQUIPMENT IDENTIFICATION

DH8H42 XB8 V.I.N. 3D7MG48C55[redacted] T.O.N. 14335670

DESCRIPTION	CODE NO.	DESCRIPTION
V9DV TRIM CODE	PS2	PRIMARY PAINT
DG8 All 4-Speed Automatic Tr	QS2	SECONDARY-PAINT
DG8 4-Spd. Automatic 46RE Tr		
DHA Lock-Up Torque Converter		
DH1 Man Shift-on-the-Fly Tra		
DJX 9.25 Front Axle w/Hub Ex		
DME 3.73 Axle Ratio		
DRX 11.50, Dual Wheels Rear		
DSA Anti-Spin Differential R		

**** PAGE 1 OF 1 **** C1004135


SOUTHEAST
SOUTHEAST SEED






HOOD

AIR BAG

RPM X1000

MPH km/h

61858

LAMP OUT

P R N D 2 1

DIESEL ONLY

E

F




A WARNING
DEATH OR SERIOUS
INJURY CAN OCCUR
A WARNING
DEATH OR SERIOUS
INJURY CAN OCCUR












Minute Maid



DRIVER'S



DRIVER'S







LEFT
FRONT



LEFT
FRONT


LEFT
SIDE


RIGHT
SIDE


RIGHT
SIDE

2 Bolt, Upper
3 Bolt, Lower (2)
4 Arm, Pitman
5 Socket, Inr Tie Rod
6 Link, Drag
7 Socket, Otr Drag Link
8 Tube, Adjusting (2)
9 End, Outer Tie Rod
10 Damper, Steering

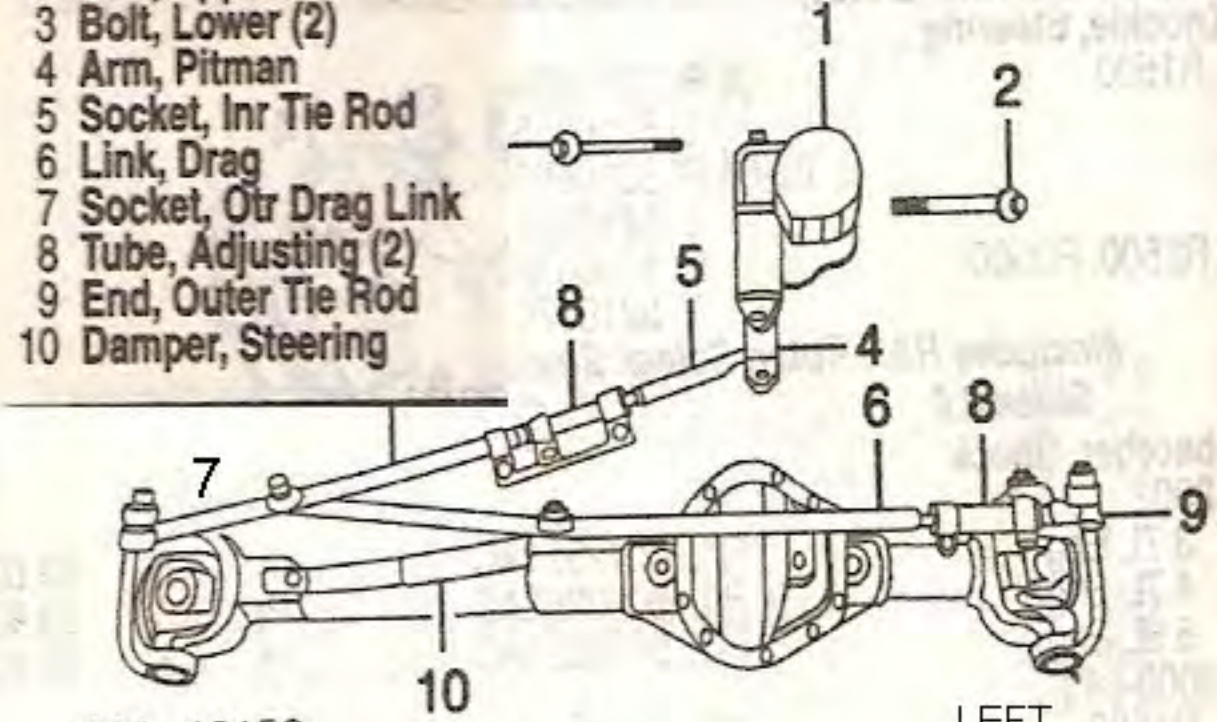

004–10158

LEFT SIDE






RIGHT
FRONT





















9769


3949769









RIGHT
FRONT


LEFT
FRONT


LEFT
FRONT


4x4
HOBBINS







RIGHT
FRONT


RIGHT
FRONT










ROBBINS
HEAVY DUTY
4X4


MFD BY DAIMLERCHRYSLER CORPORATION
DATE OF MFR 10-05
GVWR 4083 KG(09000 LB)
GAWR FRONT 2359 KG(5200 LB)
WITH TIRES LT265/70R17E
RIMS AT 17X8.0
COLD 410 KPA(60 PSI)
GAWR REAR 2727 KG(6010 LB)
WITH TIRES LT265/70R17E
RIMS AT 17X8.0
COLD 485 KPA(70 PSI)
THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.
VIN: 3D7KS29C46 [redacted]
TYPE: TRUCK
SINGLE X DUAL
MDH: 102612
PNT:PS2
VEHICLE MADE IN MEXICO
TRM:AJD5
4648507




3
4
5
RPM x 1000
0
10
20
30
40
50
60
70
80
90
100
110
120
MPH km/h
88151
40
0
110
200
140
245


HEMI 2500


DIAMOND








RAM 2500












BFG












SUPPLY Co













E PRESSURE INFORMATION

ND MAX LOAD CONDITIONS

NTS (150 LBS. EACH) PLUS 200 LBS. CARGO

D ON DRIVERS SIDE B – PILLAR PLACARD

	FRONT	REAR
DLD)	350 kPa, 50 PSI	280 kPa, 40 PSI
LD)	410 kPa, 60 PSI	485 kPa, 70 PSI
	LT265/70R17E	LT265/70R17E

AL INFORMATION 

6G177172

MFD BY DAIMLERCHRYSLER CORPORATION

DATE OF MFR 8-05

GVWR 5534 KG(12200 LB)

GAWR FRONT	WITH TIRES	RIMS AT	COLD
2359 KG(5200 LB)	LT235/80R17E	17X6.0	450 KPA(65 PSI)
GAWR REAR	WITH TIRES	RIMS AT	COLD
4242 KG(9350 LB)	LT235/80R17E	17X6.0	450 KPA(65 PSI)

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

VIN: 3D7MX48C46G[redacted] TYPE: TRUCK SINGLE DUAL X

MDH: 081622 PNT:PW7 VEHICLE MADE IN MEXICO TRM:VLJ3 4648507




09-09












MAXX


DANGER / POISON




8
14
18
1
2
3
4
0
5
RPM × 1000
BRAKE
DIESEL
ONLY
E
F
10
20
30
40
50
60
70
80
90
100
110
120
0
MPH km/h
P R N D 2 1
88752
40
0
110
140
200
240


USE APPROVED STEERING FLUID ONLY
POWER





LEFT FRONT



RIGHT FRONT





RIGHT FRONT


LEFT FRONT


RIGHT FRONT


RIGHT FRONT


RIGHT FRONT












RIGHT FRONT


RIGHT FRONT



RIGHT FRONT


LEFT FRONT



RIGHT FRONT


RIGHT FRONT


881

RIGHT FRONT

RIGHT FRONT