



Technical Bulletin

Model(s)	Year	Eng. Code	Trans. Code	VIN Range From	VIN Range To
All (Except Routan)	2014-2019	All Gasoline	All	All	All

Condition

17 18 03 August 1, 2018 **2037201** Supersedes Technical Bulletin 17-18-02 (V171802) dated July 19, 2018 to adjust engine code metadata.

Engine Oil Level

Technicians may find during PDI that the oil level is below the full mark, but still within the hash marks on the engine oil dip stick.

Technical Background

All Volkswagen gasoline engines are filled to a specific volume before leaving the factory. This level may vary depending on the testing conditions, but will always be within the allowable specification for engine protection.

Production Solution

Not applicable.

Service

When checking the engine oil level during PDI, ensure the oil level is within the oil level marks (B range in Figure 1) on the oil dip stick.

When checking the engine oil level, ensure the engine is at operating temperature, park the vehicle on a level surface to help prevent an incorrect oil level reading.

Switch off the engine and wait five minutes for the engine oil to flow back into the oil pan before checking the level.



Technical Bulletin

If the oil level is within the B range, DO NOT add additional oil.

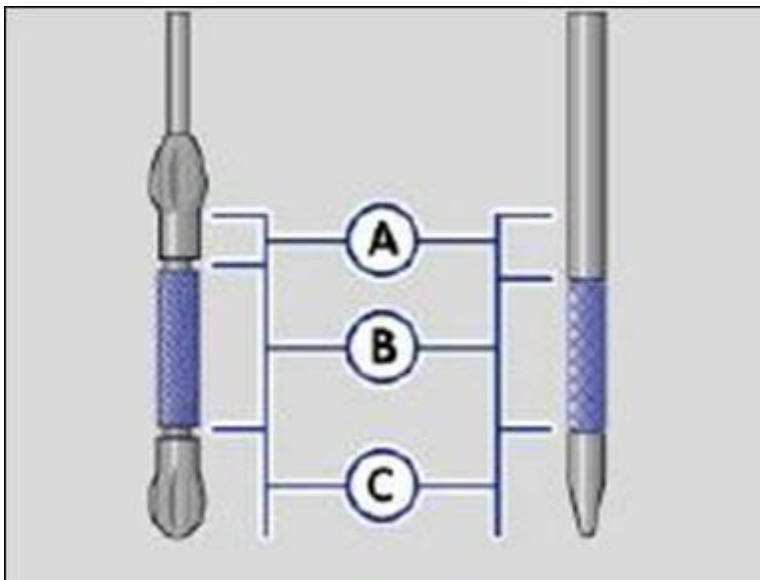


Figure 1.

Warranty

Information only.

Required Parts and Tools

Not applicable.



Technical Bulletin

Additional Information

All part and service references provided in this Technical Bulletin are subject to change and/or removal. Always check with your Parts Dept. and Repair Manuals for the latest information.

Document Control Revision Table			
Instance Number	Published Date	Version Number	Reason For Update
2037201/8	8/1/18	V171803	To adjust engine code metadata.
2037201/7	7/19/18	V171802	To include additional model and model year applicability.
2037201/6	10/19/16	V171604	To include model year 2017.
2037201/1	7/2/14	V171402	Original publication.