

November 29, 2018

Version 1

Noise from the Front Driver Door Speaker at 1500 RPM

AFFECTED VEHICLES

Year	Model	Trim	VIN Range
2019	Odyssey	Elite	5FNRL6...KB000001 thru 5FNRL6...KB056230
2018	Odyssey	Elite	ALL

SYMPTOM

There is a buzz, hum, booming, or vibration noise from the front driver door speaker at 1500 RPM while driving between 35-45 MPH.

POSSIBLE CAUSE

The software in the ANC control unit.

CORRECTIVE ACTION

Replace the ANC control unit.

PARTS INFORMATION

Part Name	Part Number	Quantity
ANC Control Unit	39200-THR-A32	1

WARRANTY CLAIM INFORMATION

The normal warranty applies.


Operation Number	Description	Flat Rate Time	Defect Code	Symptom Code	Template ID	Failed Part Number
0101C9	Replace the ANC control unit.	0.3 hr	03214	03267	A18125A	39200-THR-A31

Skill Level: Repair Technician

CUSTOMER INFORMATION:The information in this bulletin is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely maintain your vehicle. These procedures should not be attempted by "do-it-yourselfers," and you should not assume this bulletin applies to your vehicle, or that your vehicle has the condition described. To determine whether this information applies, contact an authorized Honda automobile dealer.

REPAIR PROCEDURE

1. Replace the ANC control unit. Refer to the Service Information.

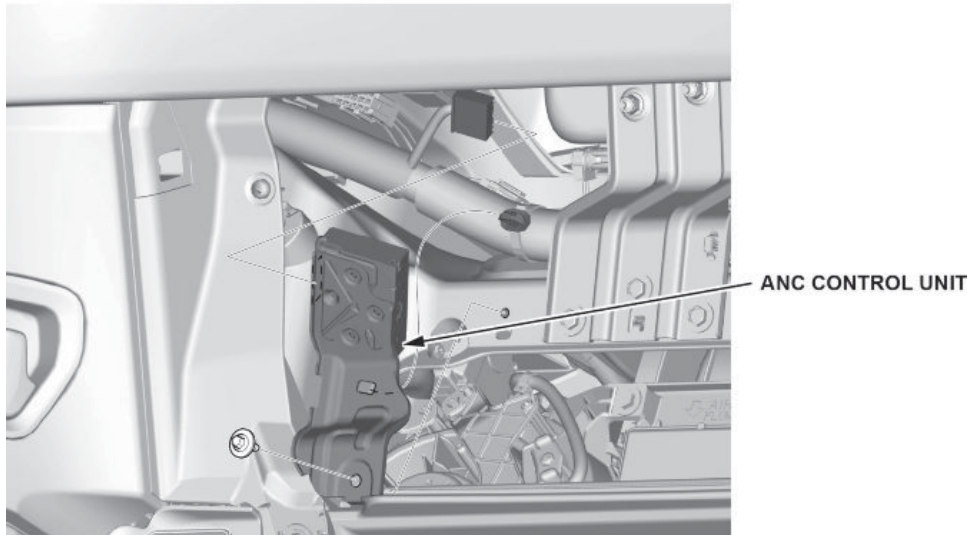

END