





EA12-003 000552



EA12-003 000553





MFD. BY FORD MOTOR CO.

DATE: 12/04

GVWR: 2621KG / 5780LB

FRONT GAWR: 1326KG / 2924LB

REAR GAWR: 1297KG / 2860LB

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

VIN: 2FMDA52235 [REDACTED] TYPE: MPV

MAXIMUM LOAD = OCCUPANTS + LUGGAGE = 544KG / 1200LB

OCCUPANTS = 07 TOTAL; 2 FRONT, 05 REAR

TIRE (FR): P235/60R16

RIMS (FR): 16X6.5J

(RR): P235/60R16

(RR): 16X6.5J

PRESSURE (FR): 240 kPa / 35 PSI COLD

(RR): 240 kPa / 35 PSI COLD

[REDACTED]

TRAILER TOWING - SEE OWNER GUIDE

EXT PNT: AQ

INT TR
L7

TP/PS

R AXLE
S 24

IRC: B9

TR
N

SPR
AMH

LDSO:

5A4TR
AOA

F0010
T0100

CBU

205A5420472-AA

4U5A-1532-AA (TUJ)



Ford

FREESTAR
4.2L ADVANCE TRAC

SEL



NO
PARKING

ENTER
←



























ELECTRIC
VEHICLE
ONLY

TEST
VEHICLES
ONLY

BRUTE



DATE: 08/04

FRONT GAWR: 1326KG/2924LB

GVWR: 2576KG / 5680LB

REAR GAWR: 1258KG / 2775LB

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

VIN: 2FMZA52245B [REDACTED] TYPE: MPV

MAXIMUM LOAD = OCCUPANTS + LUGGAGE = 544KG/1200LB

OCCUPANTS = 07 TOTAL; 2 FRONT, 05 REAR

TIRE (FR): P235/55R17

RIMS (FR): 17X7.0J

(RR): P235/55R17


(RR): 17X7.0J

PRESSURE (FR): 240 kPa/35

PSI COLD (RR): 240

kPa/35

PSI COLD

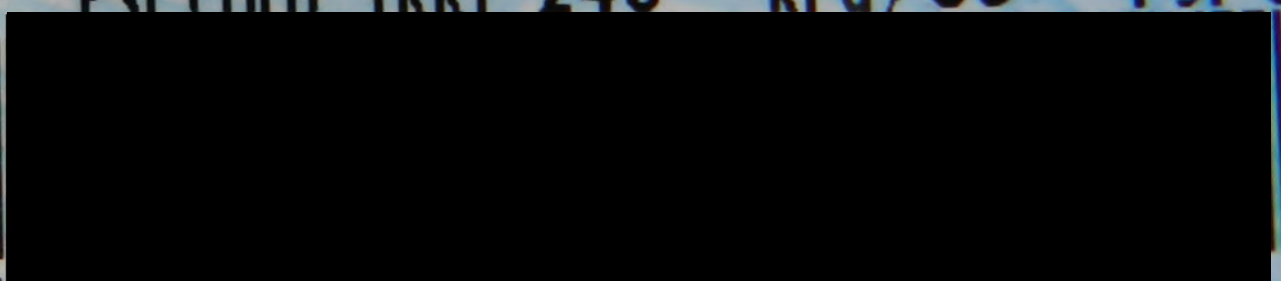

2FMZA52245B [REDACTED]

TRAILER TOWING - SEE OWNER GUIDE

EXT PNT: JP

IRC: 48

DSO:

F0025

INT TR

TP/PS

R

AXLE

TR

SPR

T0045

M6

S

24

N

AA

CBU

2U5A-5420472-AA



