

Published date: 11/5/2018

# **Preliminary Information**

## PIP5605 Air-Filter Showing 0% Life

#### Models


Brand:	Model:	Model Years:	VIN:		Engino	Transmissions:
Branu.			from	to	Engine:	Transmissions.
Chevrolet	Silverado 1500 (new Model)	2019	All	All	5.3L 6.2L, L84, L87	All
GMC	Sierra 1500 (new Model)	2019	All	All	5.3L 6.2L, L84, L87	All

Involved Region or Country	North America
Condition	There may be a concern of a DIC message saying Air Filter Life 0% replace now.
Cause	The DIC message is triggered by a battery being disconnected and reconnected

#### **Correction:**

If the vehicle is less than 6 months in service and less than 10,000 miles perform the following. Inspect the air filter, If clean (not restricted) reset the DIC message Engineering is working on a calibration for this concern that can be delivered over the air.



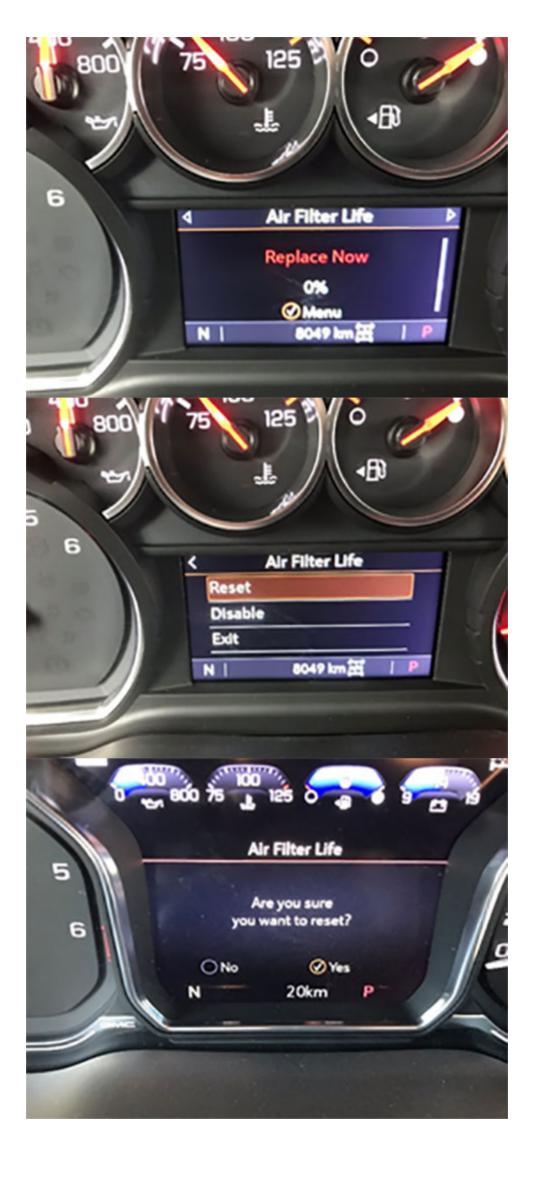



This PI will be deleted when a when the calibration is released. Then a bulletin will be developed.

## **Warranty Information**

Labor Operation	Description	Labor Time		
3481048	Check Air Filter and Reset DIC Message	0.5 HR .		
*This is a unique Labor Operation for Bulletin use only.				

## **Version History**

Version	1
Modified	11/05/2018 - Created on

















GENERAL MOTORS

© 2018 General Motors. All Rights Reserved.