Technical Bulletin



RECALL CAMPAIGN BULLETIN

 Classification:
 Reference:
 Date:

 FE19-004
 NTB19-024
 March 14, 2019

VOLUNTARY EMISSIONS RECALL CAMPAIGN 2019 ALTIMA; FRONT EXHAUST TUBE

CAMPAIGN ID #: PC689

APPLIED VEHICLE: 2019 Altima (L34) front wheel drive only

APPLIED ENGINE: PR25DD only

Check Service COMM or Dealer Business Systems (DBS) National Service History to confirm campaign eligibility.

INTRODUCTION

Nissan is conducting this voluntary emissions recall campaign on certain specific model year 2019 Altima vehicles. The front exhaust tube will be inspected and, if necessary, replaced. This service will be performed at no charge to the customer for parts or labor.

IDENTIFICATION NUMBER

Nissan has assigned identification number PC689 to this campaign. This number must appear on all communication and documentation of any nature dealing with this campaign.

DEALER RESPONSIBILITY

It is the dealer's responsibility to check Service COMM or Dealer Business Systems (DBS) National Service History for the campaign status on each vehicle falling within the range of this voluntary emissions recall which for any reason enters the service department. This includes vehicles purchased from private parties or presented by transient (tourist) owners and vehicles in a dealer's inventory. Federal law requires that new vehicles in dealer inventory which are the subject of an emissions recall must be corrected prior to sale. Failure to do so can result in civil penalties and/or fines. While federal law applies only to new vehicles, Nissan strongly encourages dealers to correct any used vehicles in their inventory before they are retailed.

Nissan Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. **NOTE:** If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Nissan dealer to determine if this applies to your vehicle.

SERVICE PROCEDURE

- 1. Raise the vehicle on a lift.
- 2. Locate the area of the front exhaust tube shown in Figure 1.

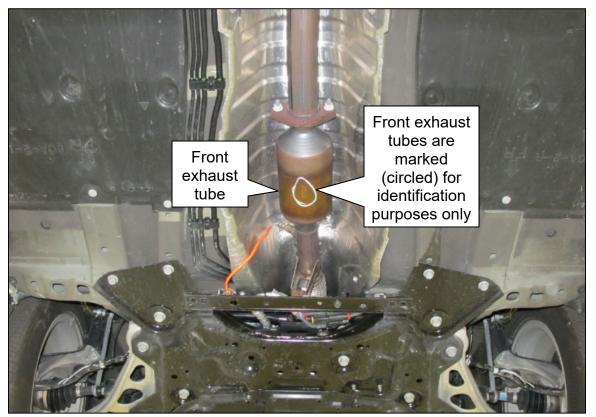


Figure 1

3. Find the etched code in the center rear of the exhaust tube.

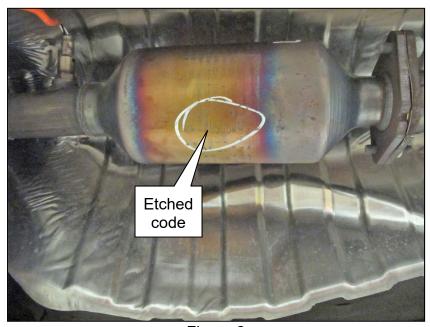


Figure 2

2/4 NTB19-024

- If the first three alphanumeric characters of the code under "NISSAN" are "6CJ", STOP HERE. No further inspection or repairs are needed.
- If the first three alphanumeric characters of the code under "NISSAN" are "6CL", replace the front exhaust tube.



Figure 3 Figure 4

 For front exhaust tube removal and installation, refer to the 2019 Altima Electronic Service Manual (ESM). Select Inspection, Removal, and Installation, and then select ENGINE > EXHAUST SYSTEM > REMOVAL AND INSTALLATION > EXHAUST SYSTEM > EXHAUST SYSTEM: Removal & Installation.

3/4 NTB19-024

PARTS INFORMATION

DESCRIPTION	PART NUMBER	QUANTITY
TUBE-EXHAUST, FRONT	200A0-6CA0A	1
GASKET-EXHAUST	20692-1HA0A	1
GASKET-EXHAUST	20692-24U0A	1
NUT-FIX, EXHAUST TUBE	20602-9U20B	2
STUD	20606-D4200	2

CLAIMS INFORMATION

Submit a "CM" line claim using the following claims coding:

CAMPAIGN ("CM") ID	DESCRIPTION	OP CODE	FRT
PC689	Inspect Front Exhaust Tube Only – OK	PC6890	0.3
	Inspect And Replace Front Exhaust Tube	PC6891	0.5

AMENDMENT HISTORY

PUBLISHED DATE	REFERENCE	DESCRIPTION
March 14, 2019	NTB19-024	Original bulletin published

4/4 NTB19-024