



Volkswagen

Service Information

Offboard Diagnostic Information System Service (ODIS Service)

Number: VOS-19-13

Subject: 92D9 Campaign – AW 0602 Online Coding Hotfix
Instructions

Date: June 3, 2019

Important:

We recommend installation of this Hotfix on one diagnostic device ONLY. Hotfix must be removed immediately after performing the procedure.

1.0 – Introduction

This Hotfix is required for use with when coding AW 0602 for the 92D9 campaign using the ODIS Service Diagnostic Content Version 2.39. A future ODIS Service Diagnostic Content version update will include this Hotfix.

!! The Hotfix must be removed after performing the diagnostic procedure. !!

2.0 – Prerequisite

ODIS Service **Diagnostic Content version 2.39 must be installed.**

To confirm the installed diagnostic content version in ODIS Service, go to: **Info > Versions.**

3.0 – Download Hotfix


1. Open **Internet Explorer** on the diagnostic device and logon to **vwhub.com > ServiceNet.**
2. Navigate through **Vehicle Diagnostics > Offboard Diagnostic Information System Service > Hotfixes/software.**
3. Click the **92D9 Campaign_Hotfix.zip** file and **Save** it to your Windows desktop.
4. Close Internet Explorer.
5. Browse to the desktop and double-click the **92D9_Hotfix.zip** file to open it.




Service Information

(cont.)

6. Right click the file name and select **Copy**:

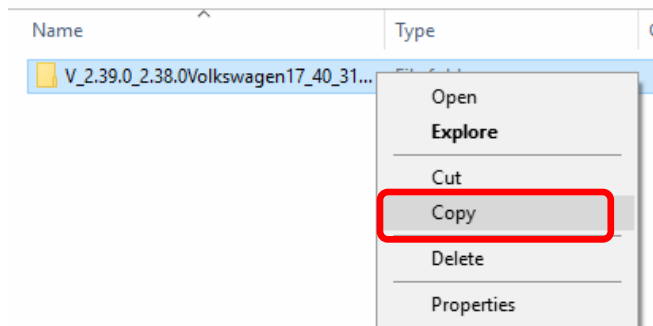


7. Right click anywhere on the Windows desktop and select **Paste**. This file icon must appear on the desktop:



4.0 – Install Hotfix into ODIS Service

1. Open ODIS Service (“Run as Administrator”)
2. Expand the **Data** submenu and click **Download** (under **Hotfix**):

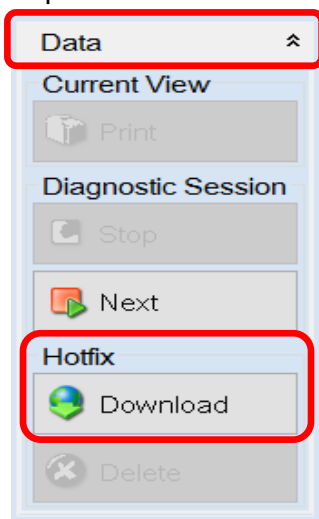





Service Information

(cont.)

3. Click **Continue**:

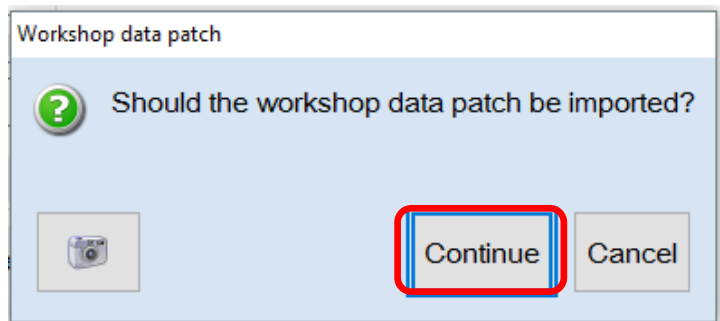


4. A Directory Selection box will appear. Browse to and **highlight the Hotfix file**, then click **OK**:

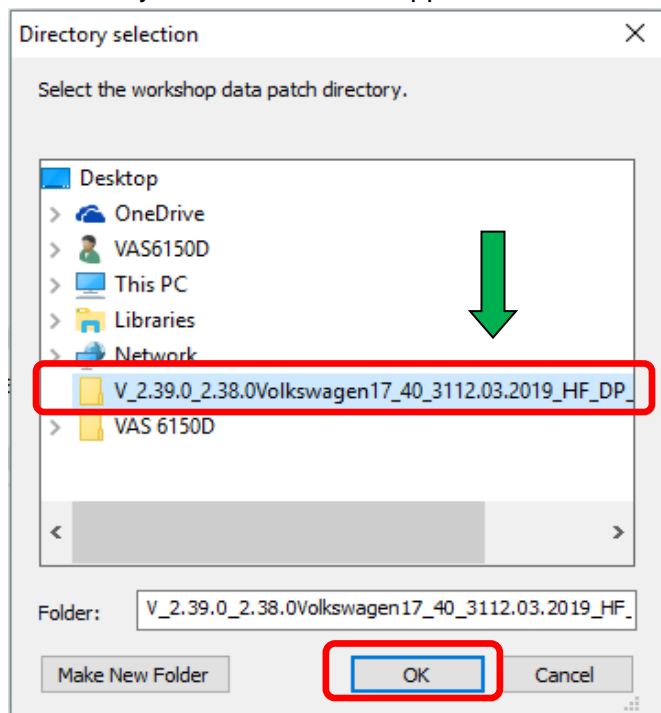



Service Information

5. Click **OK**:

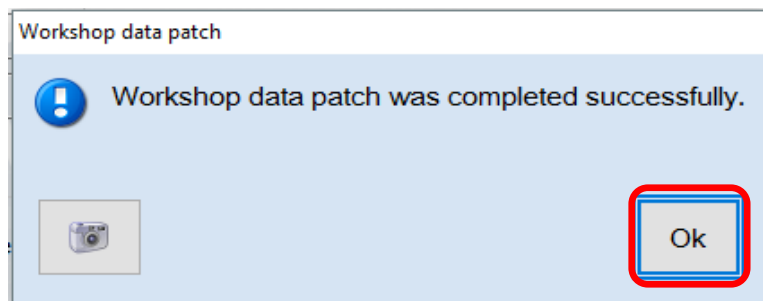



(cont.)

6. Perform the diagnostic procedure.

Important:

The Hotfix must be removed after performing the procedure. Failure to do so will cause other vehicle diagnostics sessions to malfunction.

1. Select **Delete** (under Hotfix), then **Continue**:

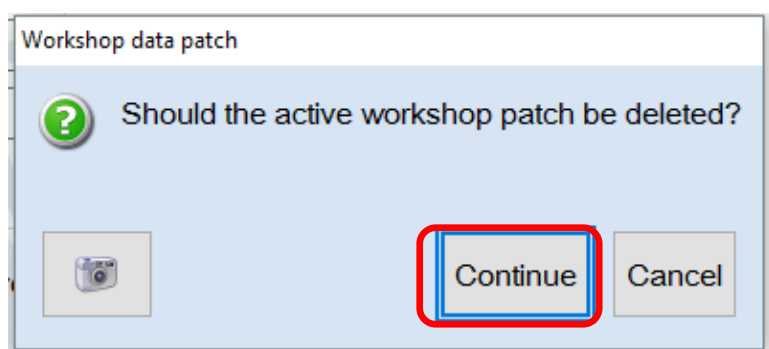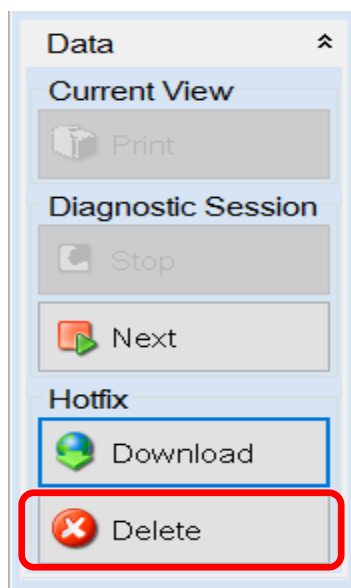



Volkswagen

Service Information

2. Click **OK** and close ODIS Service:

