

**5 G - 1 0**

## **Power Switch**

The power switch is located on the rear panel. Press the switch in the upper position to turn the analyzer on. The center position is off. The lower position turns the internal battery charger on when external power is applied to the DC power connector. See battery charging section for more information.

## **Insert Exhaust Probe into Tailpipe**

Insert the exhaust probe fully into the tailpipe. The tubing coil on the exhaust probe can serve as clamp to attach the probe to the edge of the tailpipe. See Figure 2.

**Vehicle Tailpipe**

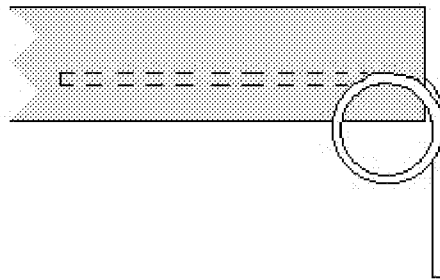


Figure 2

## **Begin Reading Gas Values**

That's it! Begin reading gas values on the display.