



RP170 Power connector incorrect gender on Terrapro

Description:

Some Mack Terrapro trucks were built with an incorrect connector for the Bodylink RP170 power connection. A jumper is available to change the connection to the correct gender.

Corrective Action:

Add jumper PN 23630007, fold back extra length and secure to harness.

UCHP SCC CODE: S7404

EXPIRATION DATE: 7/31/2020

CAUSAL PART NUMBER: 23271015

UCHP Labor Code:

3713-03-02-02 Connector, Replacement: 0.3

PARTS MARKUP: 30%

PARTS LIST:

PN – Description – QTY

23630007 – RP170 Power jumper – 1

FOR MORE INFORMATION CONTACT: Sean Gallagher


sean.gallagher@volvo.com

Decommissioning the Truck for Repair


You must read and understand the precautions and guidelines in Service Information, group 30, "General Safety Practices, Electrical" before performing this procedure. If you are not properly trained and certified in this procedure, ask your supervisor for training before you perform it.

NOTE: Information is subject to change without notice. Illustrations are used for reference only and can differ slightly from the actual vehicle being serviced. However, key components addressed in this information are represented as accurately as possible.

1. Park the vehicle on a flat and level surface.
2. Apply the parking brake.
3. Place the transmission in neutral or park.
4. Install the wheel chocks.

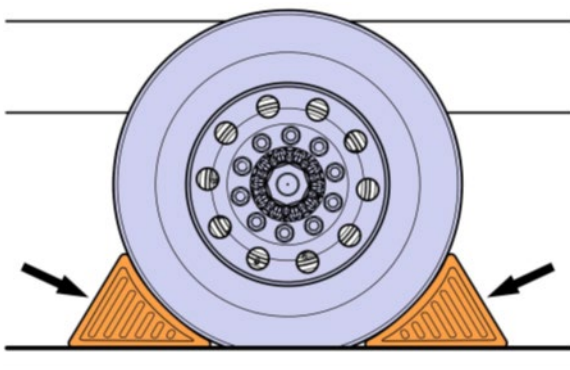

Disconnect the battery.

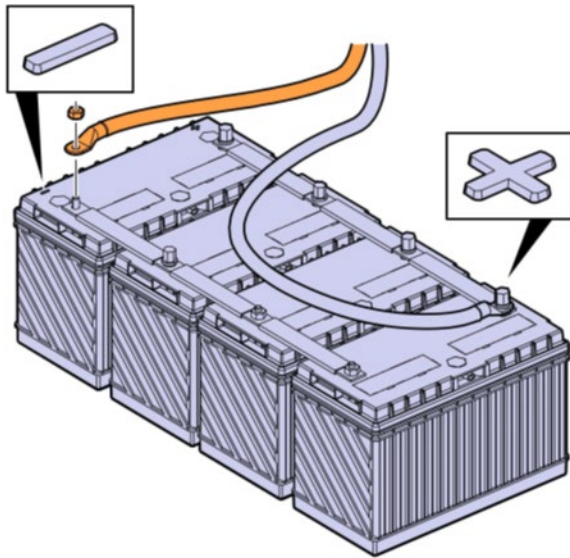

Repair Procedure:


1. Locate clean power connector



2. Add jumper PN 23630007

Commissioning the Truck for Operation

1. Connect the battery cable to the negative (ground) terminal.

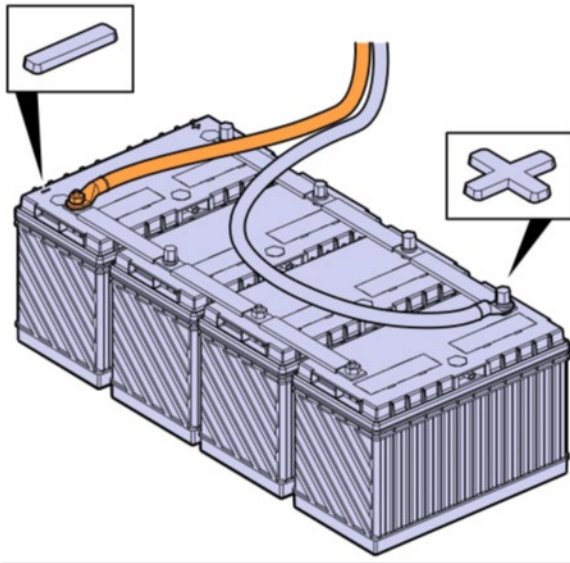

2. Remove the wheel chocks.

