

FLA COE  
FLB COE  
FLD Conventional  
Business Class  
FLC 112 Conventional

Century Class Conventional  
Argosy COE  
Cargo  
Columbia  
122SD and Coronado

Business Class M2  
> Cascadia  
108SD/114SD  
New Cascadia

**Freightliner  
Service Bulletin**

**Description of Revisions:** *This bulletin replaces the version dated July 2015. Software update 6.3 OBD 2016 is added in [Table 1](#).*

## General Information

Cascadia Cabin CAN electronic control units (ECUs) must have compatible software. See [Table 1](#) for a cross reference of ECU release numbers and compatible software versions. Compatible software levels are required for the proper operation of the vehicle.

Use the instructions in this bulletin to bring all Cabin CAN ECUs to compatible levels of software. Affected ECUs include the following:

- SAM Cab
- SAM Chassis
- Modular Switch Field (MSF)
- Central Gateway (CGW)

When a vehicle is in service it is possible for one or more of these ECUs to be replaced or programmed with a software level that is not compatible with the others.

If DiagnosticLink detects a compatibility issue:

- A yellow error message is displayed at the top of the window indicating that the software versions are incompatible. This message remains until the software is updated for all Cabin CAN ECUs. See [Fig. 1](#).
- Clicking the message brings up a window detailing software options for each ECU. See [Fig. 2](#).

If ServiceLink detects a compatibility issue:

- A dialog box appears indicating that the software versions are incompatible. See [Fig. 3](#).
- The incompatible ECUs are displayed on the "Problem ECU" list. The incompatible ECUs remain on this list until they are each updated with compatible software. To view the "Problem ECU" list, click on the "List" icon from the "General Info" screen. See [Fig. 4](#).

**NOTE:** This bulletin details compatibility of ECU *software* versions only. To identify compatible ECU hardware, see **Service Bulletin 54-231**, *Replacing SAM Cab and SAM Chassis Hardware Assemblies*.

**IMPORTANT:** Do not downgrade ECUs to older software versions to obtain compatibility. When a software version is updated, it permanently updates the host and vehicle information to that software release.

When upgrading software, always perform the upgrade before adding or changing the parameters. When ECU software is upgraded, DiagnosticLink or ServiceLink will automatically migrate and then write the parameters to complete the upgrade.

## Compatible Sets of Cabin CAN ECU Software

The software versions of the four Cascadia Cabin CAN ECUs must be compatible. The software in all four ECUs must be coordinated to one of the release versions shown in [Table 1](#). For the electronics to operate properly, use DiagnosticLink or ServiceLink to check and program any ECU with the software that will make it compatible with the others for the appropriate release.

**NOTE:** In most instances there is more than one compatible software version that an ECU could have for a release.

**Freightliner  
Service Bulletin**

 FLA COE  
 FLB COE  
 FLD Conventional  
 Business Class  
 FLC 112 Conventional

 Century Class Conventional  
 Argosy COE  
 Cargo  
 Columbia  
 122SD and Coronado

 Business Class M2  
 > Cascadia  
 108SD/114SD  
 New Cascadia

## Combining SAM Release Versions 5.4 and 6.31

A 6.31 SAM may be used in a 5.4 vehicle without the need to upgrade the other Cabin CAN ECUs. If the vehicle is at a software level lower than the 5.4 release, the Cabin CAN ECUs must first be flashed up to the software levels in version 5.4. DiagnosticLink or ServiceLink will provide the 5.4 release software that is compatible for the vehicle hardware.

When a SAM 6.31 is used on a 5.4 vehicle, DiagnosticLink or ServiceLink is then required to upgrade the host software information and parameters for the new SAM 6.31.

After installing the SAM 6.31, connect DiagnosticLink or ServiceLink in order to upgrade the new SAM. If using DiagnosticLink, use the "Program Device" window. If using ServiceLink, click on the "Flashing" tab. This process permanently upgrades the host and vehicle information for the SAM to release 6.31.

## Attempting to Combine SAM Release Versions 6.0 and 6.31

SAM version 6.31 may not be used in a 6.0 vehicle unless the other SAM with release 6.0 software is upgraded to release 6.31.

DiagnosticLink or ServiceLink provides the 6.31 software that is compatible for the vehicle hardware. DO NOT select the newest available version of the software unless it is intended to upgrade the vehicle to 6.31. Use the 6.0 software version identified in [Table 1](#) to keep the SAMs at 6.0.

When a SAM 6.31 is installed on a vehicle with 6.0 software, DiagnosticLink or ServiceLink must upgrade the host software information and parameters for both the new SAM 6.31 and the other CAN ECUs installed on the vehicle.

After replacing the SAM Cab or SAM Chassis, connect DiagnosticLink or ServiceLink to the vehicle. Select the "Program Device" window in DiagnosticLink, or the "Flashing" tab in ServiceLink to program the SAM with the latest available software version. Complete this step for both SAMs. This process permanently upgrades the host and vehicle information for the SAMs to release 6.31.

**IMPORTANT:** When replacing the CGW on EPA07 vehicles, J1587 wires must be decommissioned on the new CGW to keep ICU and engine odometer values close to each other. Blunt cutting the wires and taping them back is recommended.

When EPA07 CGWs were discontinued, CGWs intended for EPA10 vehicles, and later, were adapted to repair older vehicles. Unlike EPA10 vehicles, and later, EPA07 vehicles broadcast on both J1939 (source address 0) and J1587 (MID 128). When EPA10 engines stopped broadcasting directly on J1587, the new CGW was designed to rebroadcast J1939 engine data on J1587 (as if it were MID 128) to support modules listening only to J1587. Therefore, if an EPA10 CGW is installed on an EPA07 vehicle, and the CGW J1587 wires are not decommissioned, the result will be *two* MID 128 signals; one signal is from the EPA07 engine on J1587, and the other signal is from the new CGW rebroadcasting EPA07 J1939 data as another MID 128 signal on J1587.

**NOTE:** Decommissioning CGW J1587 wires is required *only* when replacing CGW hardware, not when updating CGW software.

Decommissioning CGW J1587 wires to maintain odometer accuracy will result in the loss of the following features:

- Information broadcast by the CGW on J1587, such as CAN faults and ambient air temperature
- +/- steering wheel ICU control on vehicles equipped with an ICU3 or ICU4; the ICU4M is not affected

# Cascadia Cabin CAN ECU Compatibility

# 54-239

FLA COE  
 FLB COE  
 FLD Conventional  
 Business Class  
 FLC 112 Conventional

Century Class Conventional  
 Argosy COE  
 Cargo  
 Columbia  
 122SD and Coronado

Business Class M2  
 > Cascadia  
 108SD/114SD  
 New Cascadia

**Freightliner  
 Service Bulletin**

Compatible Sets of Cabin CAN ECU Software				
Release	Software Version/Flash Version			
	SAM Cab	CGW	MSF	SAM Chassis
6.3 OBD 2016	14.38.000 A0504480558_001	15.43.000 A0004484927_001	13.25.000 A0504480423_001	14.28.000 A0504480561_001
6.31	14.38.000 A0504480558_001	9.33.000 A0504480127_001 <b>OR</b> 9.48.000 A0504480227_001 <b>OR</b> 12.30.000 A0504480427_001 <b>OR</b> 14.05.000 A0504480527_001	10.10.000 A0504480123_001 <b>OR</b> 12.11.000 A0504480323_001 <b>OR</b> 13.25.000 A0504480423_001	14.28.000 A5004480561_001
6.2*	11.29.005 A0504480458_001	9.33.000 A0504480127_001 <b>OR</b> 9.48.000 A0504480227_001 <b>OR</b> 12.30.000 A0504480427_001 <b>OR</b> 14.05.000 A0504480527_001	10.10.000 A0504480123_001 <b>OR</b> 12.11.000 A0504480323_001 <b>OR</b> 13.25.000 A0504480423_001	11.29.004 A0504480461_001

### Freightliner Service Bulletin

FLA COE  
FLB COE  
FLD Conventional  
Business Class  
FLC 112 Conventional

Century Class Conventional  
Argosy COE  
Cargo  
Columbia  
122SD and Coronado

Business Class M2  
> Cascadia  
108SD/114SD  
New Cascadia

Compatible Sets of Cabin CAN ECU Software				
Release	Software Version/Flash Version			
	SAM Cab	CGW	MSF	SAM Chassis
6.0	9.31.005 A0504480285_001	9.33.000 A0504480127_001 <b>OR</b> 9.48.000 A0504480227_001 <b>OR</b> 12.30.000 A0504480427_001 <b>OR</b> 14.05.000 A0504480527_001	08.31.000 A0004480623_001 <b>OR</b> 9.51.000 A0504480023_001 <b>OR</b> 10.10.000 A0504480123_001 <b>OR</b> 12.11.000 A0504480323_001 <b>OR</b> 13.25.000 A0504480423_001	9.31.005 A0504480261_001
5.4	8.17.014 A0004484758_001 <b>OR</b> 8.17.015 A0004484758_002	8.42.000 A0004480727_001 <b>OR</b> 9.33.000 A0504480127_001 <b>OR</b> 9.48.000 A0504480227_001 <b>OR</b> 12.30.000 A0504480427_001 <b>OR</b> 14.05.000 A0504480527_001	08.31.000 A0004480623_001 <b>OR</b> 9.51.000 A0504480023_001 <b>OR</b> 10.10.000 A0504480123_001 <b>OR</b> 12.11.000 A0504480323_001 <b>OR</b> 13.25.000 A0504480423_001	8.17.016 A0004481961_003

# Cascadia Cabin CAN ECU Compatibility

# 54-239

FLA COE  
 FLB COE  
 FLD Conventional  
 Business Class  
 FLC 112 Conventional

Century Class Conventional  
 Argosy COE  
 Cargo  
 Columbia  
 122SD and Coronado

Business Class M2  
 > Cascadia  
 108SD/114SD  
 New Cascadia

**Freightliner  
 Service Bulletin**

Compatible Sets of Cabin CAN ECU Software				
Release	Software Version/Flash Version			
	SAM Cab	CGW	MSF	SAM Chassis
5.2	7.36.005 A0004484658_001	07.22.000 A0004480427_001 <b>OR</b> 08.40.000 A0004480627_001	07.24.000 A0004480523_001	07.36.005 A0004481861_001
5.0	07.17.003 A0004484558_001	07.22.000 A0004480427_001 <b>OR</b> 08.40.000 A0004480627_001	07.24.000 A0004480523_001	07.17.003 A0004481761_001
5.4 with a SAM Cab 6.2*	11.29.005 A0504480458_001	8.42.000 A0004480727_001 <b>OR</b> 9.33.000 A0504480127_001 <b>OR</b> 9.48.000 A0504480227_001 <b>OR</b> 12.30.000 A0504480427_001 <b>OR</b> 14.05.000 A0504480527_001	08.31.000 A0004480623_001 <b>OR</b> 9.51.000 A0504480023_001 <b>OR</b> 10.10.000 A0504480123_001 <b>OR</b> 12.11.000 A0504480323_001 <b>OR</b> 13.25.000 A0504480423_001	8.17.016 A0004481961_003

### Freightliner Service Bulletin

FLA COE  
FLB COE  
FLD Conventional  
Business Class  
FLC 112 Conventional

Century Class Conventional  
Argosy COE  
Cargo  
Columbia  
122SD and Coronado

Business Class M2  
> Cascadia  
108SD/114SD  
New Cascadia

Compatible Sets of Cabin CAN ECU Software					
Release	Software Version/Flash Version				
	SAM Cab	CGW	MSF	SAM Chassis	
5.4 with a SAM Chassis 6.2*	8.17.014 A0004484758_001 <b>OR</b> 8.17.015 A0004484758_002	8.42.000 A0004480727_001 <b>OR</b>	08.31.000 A0004480623_001 <b>OR</b>	11.29.004 A0504480461_001	
		9.33.000 A0504480127_001 <b>OR</b>	9.51.000 A0504480023_001 <b>OR</b>		
		9.48.000 A0504480227_001 <b>OR</b>	10.10.000 A0504480123_001 <b>OR</b>		
		12.30.000 A0504480427_001 <b>OR</b>	12.11.000 A0504480323_001 <b>OR</b>		
		14.05.000 A0504480527_001	13.25.000 A0504480423_001		
		8.42.000 A0004480727_001 <b>OR</b>	08.31.000 A0004480623_001 <b>OR</b>		8.17.016 A0004481961_003
		9.33.000 A0504480127_001 <b>OR</b>	9.51.000 A0504480023_001 <b>OR</b>		
		9.48.000 A0504480227_001 <b>OR</b>	10.10.000 A0504480123_001 <b>OR</b>		
		12.30.000 A0504480427_001 <b>OR</b>	12.11.000 A0504480323_001 <b>OR</b>		
		14.05.000 A0504480527_001	13.25.000 A0504480423_001		

FLA COE  
 FLB COE  
 FLD Conventional  
 Business Class  
 FLC 112 Conventional

Century Class Conventional  
 Argosy COE  
 Cargo  
 Columbia  
 122SD and Coronado

Business Class M2  
 > Cascadia  
 108SD/114SD  
 New Cascadia

**Freightliner  
 Service Bulletin**

Compatible Sets of Cabin CAN ECU Software				
Release	Software Version/Flash Version			
	SAM Cab	CGW	MSF	SAM Chassis
5.4 with a SAM Chassis 6.31		8.42.000 A0004480727_001	08.31.000 A0004480623_001	
		<b>OR</b>	<b>OR</b>	
		9.33.000 A0504480127_001	9.51.000 A0504480023_001	
	8.17.014 A0004484758_001	<b>OR</b>	<b>OR</b>	
	<b>OR</b>	9.48.000 A0504480227_001	10.10.000 A0504480123_001	14.28.000 A5004480561_001
	8.17.015 A0004484758_002	<b>OR</b>	<b>OR</b>	
		12.30.000 A0504480427_001	12.11.000 A0504480323_001	
		<b>OR</b>	<b>OR</b>	
		14.05.000 A0504480527_001	13.25.000 A0504480423_001	

\* Refer to recall SF641 for additional information about programming daytime running lights (DRL).

**Table 1, Compatible Sets of Cabin CAN ECU Software**

## Warranty

This is an informational bulletin only. Warranty does not apply.

## Freightliner Service Bulletin

FLA COE  
 FLB COE  
 FLD Conventional  
 Business Class  
 FLC 112 Conventional

Century Class Conventional  
 Argosy COE  
 Cargo  
 Columbia  
 122SD and Coronado

Business Class M2  
 > Cascadia  
 108SD/114SD  
 New Cascadia

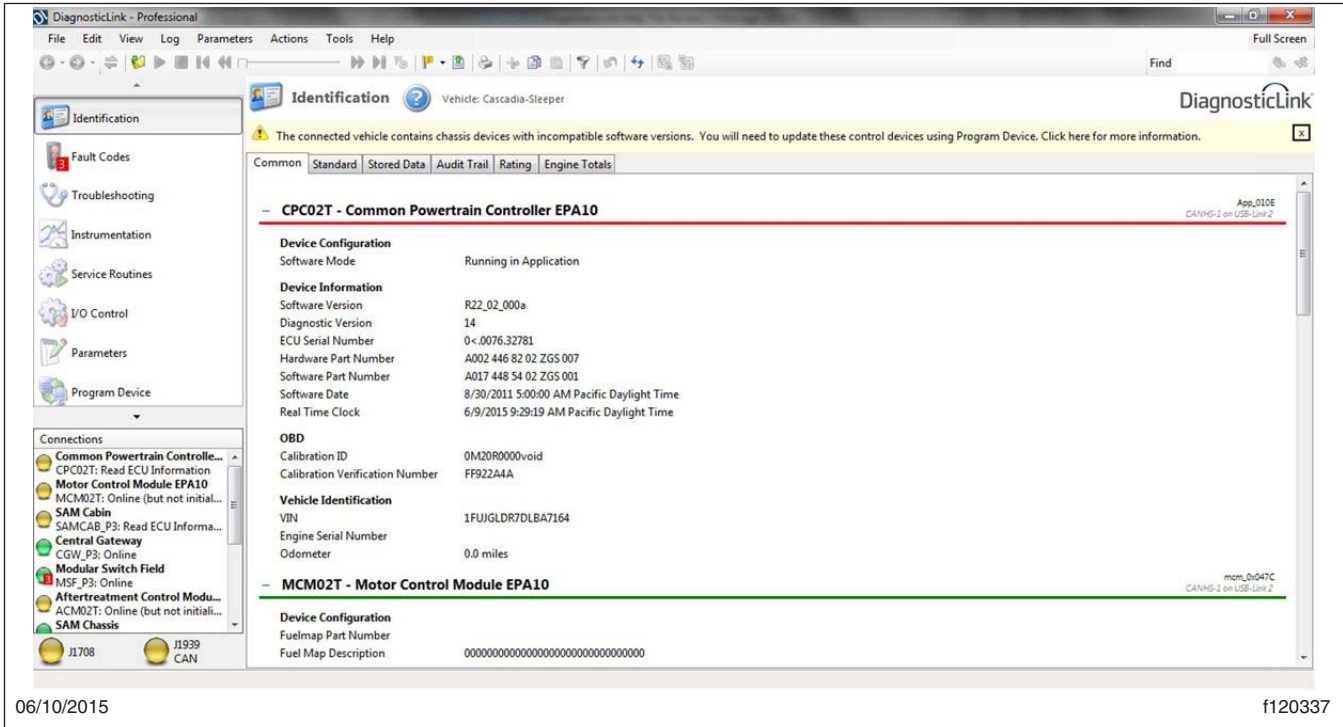



Fig. 1, DiagnosticLink Compatibility Message

FLA COE  
 FLB COE  
 FLD Conventional  
 Business Class  
 FLC 112 Conventional

Century Class Conventional  
 Argosy COE  
 Cargo  
 Columbia  
 122SD and Coronado

Business Class M2  
 > Cascadia  
 108SD/114SD  
 New Cascadia

**Freightliner  
 Service Bulletin**

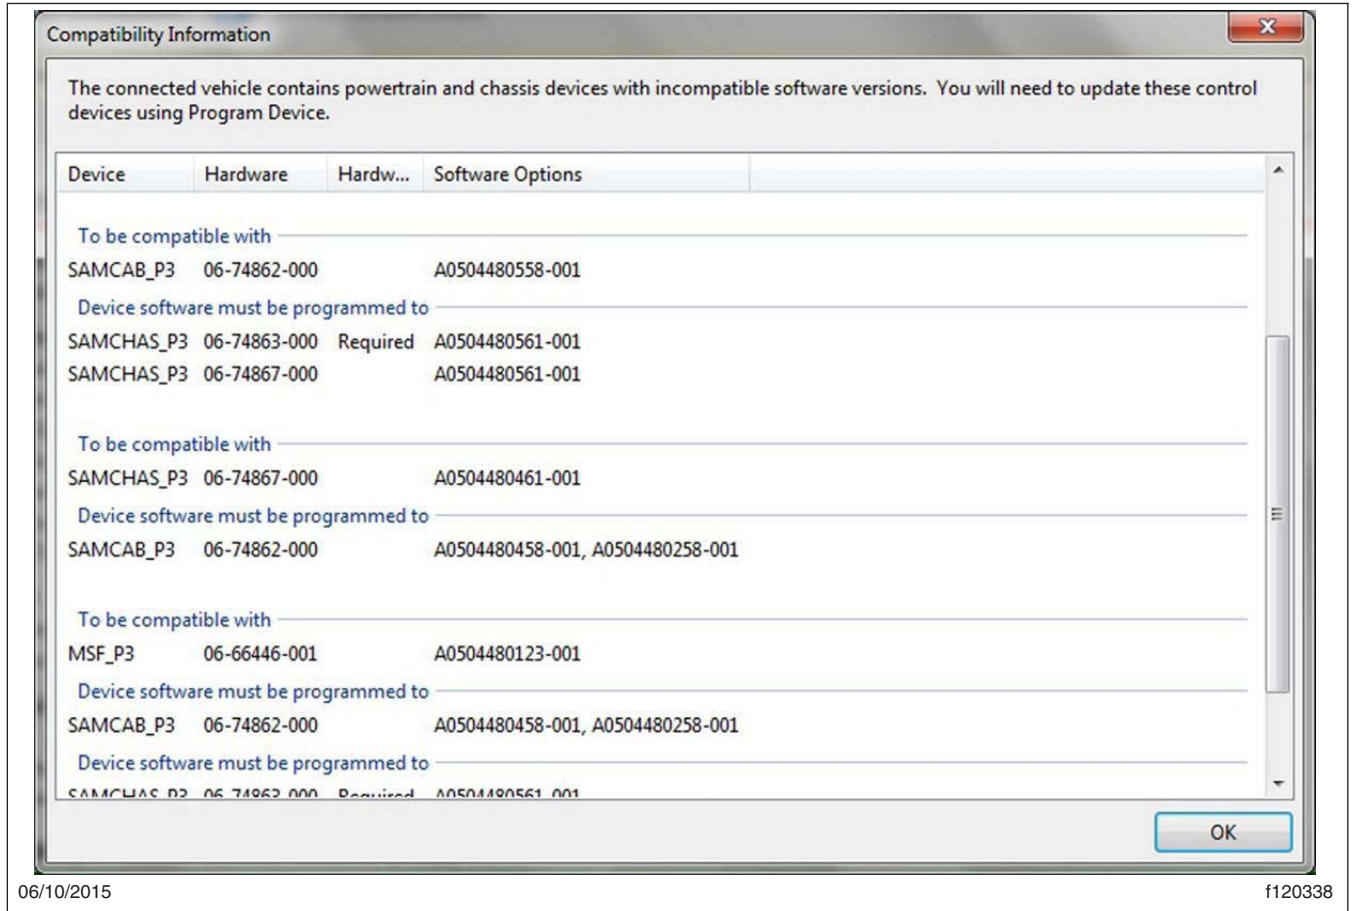

06/10/2015


f120338

**Fig. 2, DiagnosticLink Compatibility Details**

FLA COE  
FLB COE  
FLD Conventional  
Business Class  
FLC 112 Conventional

Century Class Conventional  
Argosy COE  
Cargo  
Columbia  
122SD and Coronado

Business Class M2  
> Cascadia  
108SD/114SD  
New Cascadia

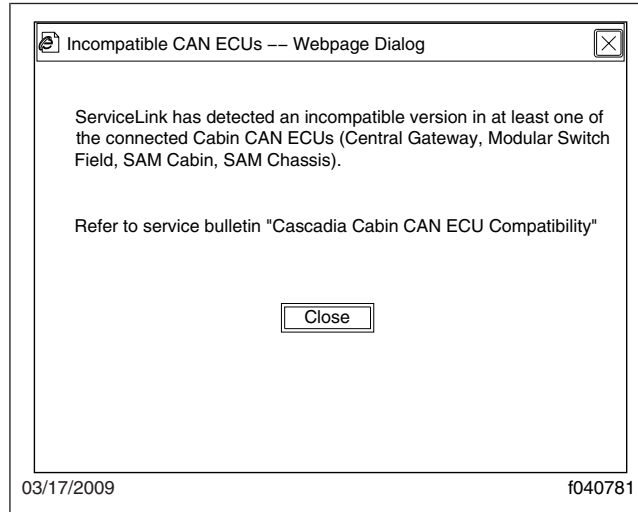

**Fig. 3, ServiceLink Compatibility Detection Dialog Box**

FLA COE  
FLB COE  
FLD Conventional  
Business Class  
FLC 112 Conventional

Century Class Conventional  
Argosy COE  
Cargo  
Columbia  
122SD and Coronado

Business Class M2  
> Cascadia  
108SD/114SD  
New Cascadia

**Freightliner  
Service Bulletin**

**ServiceLink** Home | ▶ECUs | Admin | Help

Disconnect

General Info | Faults ▲ | Templates ?

J1708  J1939  CAN

Sync ECU List to Host Show ECU History

CAN ECU's detected - 4

ECU ID	ECU Description	Make	Model	Software Version
33	SAM Cabin	Freightliner	highline	07.36.005
37	Central Gateway	Freightliner	baseline	07.05.000
49	Modular Switch Field	Freightliner	baseline	07.13.001
71	SAM Chassis	Freightliner	highline	07.36.005

\*Information appearing in gray comes from messages routed by the Central Gateway from ECUs physically connected to a different protocol. To troubleshoot ECUs in gray, select their primary protocol and navigate to the specific ECU icon on the left of the screen.

Problem ECUs: 3

Status	Description	Protocol	ECU	Make	Model	Software Version
MISSING	Engine #1	J1708	128	DTDSC	6067GK60	32.08
MISSING	Brakes, Power Unit	J1708	136	RCKWB	NA-490	D
MISSING	Instrument Cluster	J1708	140	FRGHT	ICU3	U.r.3.2.2
Incompatible	CAN ECUs - Refer to service bulletin "Cascadia Cabin CAN ECU Compatibility"					

03/19/2009 f040782

A. The incompatible row is shown on the "Problem ECUs" list.

**Fig. 4, CAN ECU List on the General Info Screen**