

NUMBER: 02-006-16

GROUP: Front Suspension

DATE: October 29, 2016

This bulletin is supplied as technical information only and is not an authorization for repair. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without written permission of FCA US LLC.

SUBJECT:

Toe Adjustment - Recirculating Ball Steering System

MODELS:

2013 - 2017	(D2)	Ram 3500 Pickup
2014 - 2017	(DJ)	Ram 2500 Pickup
2014 - 2017	(DD)	Ram 3500 Cab Chassis
2014 - 2017	(DX)	Ram Truck (Mexico) (Heavy Duty Trucks)

DISCUSSION:

The vehicles identified above have a drag link with an adjustment sleeve and jam nuts (Fig. 1), which differs from the previous clamp and bolt style.

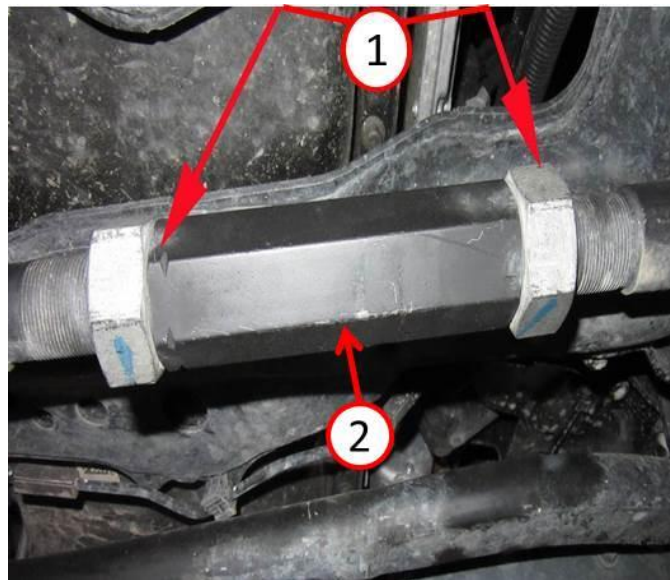


Fig. 1 Adjuster

1 - Jam Nuts

2 - Adjuster

NOTE: When tightening the drag link jam nuts ([Fig. 1](#)), the adjuster sleeve must always be held secure with a wrench/tool.

POLICY:

Information Only