



## Preliminary Information

### PIP5335D SES Lamp With Camshaft Position Codes P0340 and/or P0341

#### Models

Brand:	Model:	Model Years:	VIN:		Engine:	Transmissions:
			from	to		
Cadillac	Escalade	2015 - 2020	All	All	6.2L L86	All
Chevrolet	Silverado LD	2014 - 2019	All	All	4.3L LV3 5.3L L83 6.2L L86	All
Cadillac	Suburban	2015 - 2020	All	All	5.3L L83	All
Chevrolet	Tahoe	2015 - 2020	All	All	5.3L L83	All
GMC	Sierra Limited	2014 - 2019	All	All	4.3L LV3 5.3L L83 6.2L L86	All
GMC	Yukon Models	2014 - 2020	All	All	5.3L L83 6.2L L86	All

#### Supersession Statement

This PI was superseded to update Model Years. Please discard PIP5335B.

The following diagnosis might be helpful if the vehicle exhibits the symptom(s) described in this PI.


#### Condition / Concern

A vehicle may be setting DTC's P0340 and P0341 at times.

#### Recommendations / Instructions

If normal SI Diagnostics does not isolate the concern, inspect for corrosion in connector X154 or X159 (2015 only) located on the front cover next to the vacuum pump.

See the illustration below

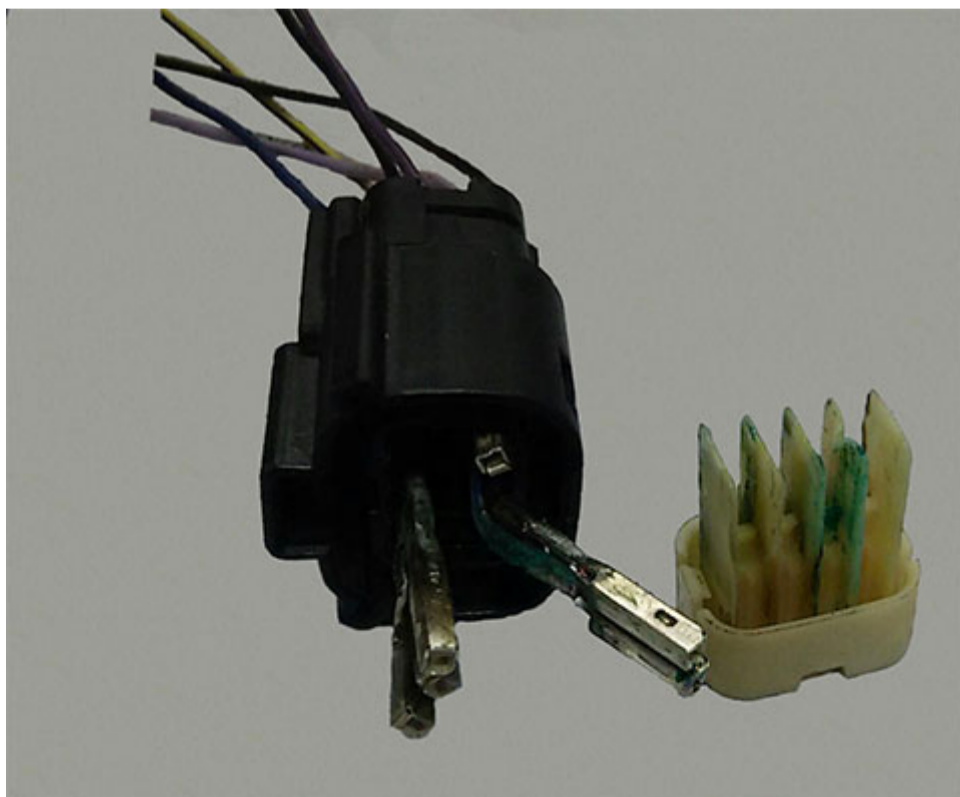

If this condition is encountered repair as needed.

## Warranty Information

For wiring repairs covered under warranty, please refer to latest version of bulletin [10-00-89-005](#) for warranty information on wire/connector repairs.

Please follow this diagnostic or repair process thoroughly and complete each step. If the condition exhibited is resolved without completing every step, the remaining steps do not need to be performed.



© 2019 General Motors. All Rights Reserved.