

Published date: 11/20/2019

Preliminary Information

PIT5410B Diagnostic Tip - Unable to Change HVAC Mode Defrost or Recirc Position

Models

Brand:	Model:	Model Years:	VIN:		Engine	Transmissions:
			from	to	Engine:	rransmissions.
Chevrolet	Express	2012 - 2020	All	All	All	All
GMC	Savana	2012 - 2020	All	All	All	All

Supersession Statement

This PI was superseded to add Model years. Please discard PIT5410A.

The following diagnosis might be helpful if the vehicle exhibits the symptom(s) described in this PI.


Condition / Concern

Some customers may comment that they cannot change HVAC Mode, Defrost or RECIRC positions.

Recommendations / Instructions

These vehicles use vacuum actuators to operate the HIAC Mode, Defrost, and Recirc doors. Inspect vacuum lines from HIAC Control to affected actuator for being pinched causing a restriction or ope in the line.

NOTE: Most issues are located near the HVAC Control Head as shown below

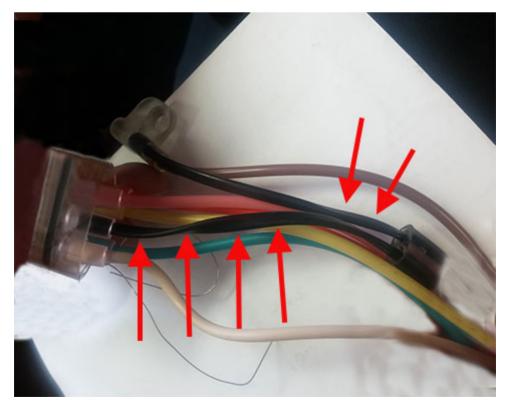

This information will be published in a bulletin at a later date.

Please follow this diagnostic or repair process thoroughly and complete each step. If the condition exhibited is resolved without completing every step, the remaining steps do not need to be performed.

















GENERAL MOTORS

© 2019 General Motors. All Rights Reserved.