



# Preliminary Information

## PIP5330D Coolant Loss And/Or Coolant Odor

Product Investigation Review Required

### Models

Brand:	Model:	Model Years:	VIN:		Engine:	Transmissions:
			from	to		
Cadillac	CTS-V	2016 - 2019	All	All	6.2L LT4	All
Cadillac	Escalade	2015 - 2019	All	All	6.2L L86	All
Chevrolet	Camaro	2016 - 2019	All	All	6.2L LT1 LT4	All
Chevrolet	Corvette	2016 - 2019	All	All	6.2L LT1 LT4	All
Chevrolet	Silverado	2014 - 2019	All	All	4.3L 5.3L 6.2L LV3 L83 L86	All
Chevrolet	Suburban	2015 - 2019	All	All	5.3L L83	All
Chevrolet	Tahoe	2015 - 2019	All	All	5.3L L83	All
GMC	Sierra	2014 - 2019	All	All	4.3L 5.3L 6.2L LV3 L83 L86	All
GMC	Yukon models	2014 - 2019	All	All	5.3L 6.2L L83 L86	All

### Supersession Statement

This PI was superseded to update Model Years. Please discard PIP533C.


The following diagnosis might be helpful if the vehicle exhibits the symptom(s) described in this PI.

### Condition / Concern

**A vehicle may have a concern with coolant loss and/or coolant odor after driving the vehicle.**

### Recommendations / Instructions

**If the coolant is low pressure test the cooling system looking for leaks at the outer head bolts. See below:**

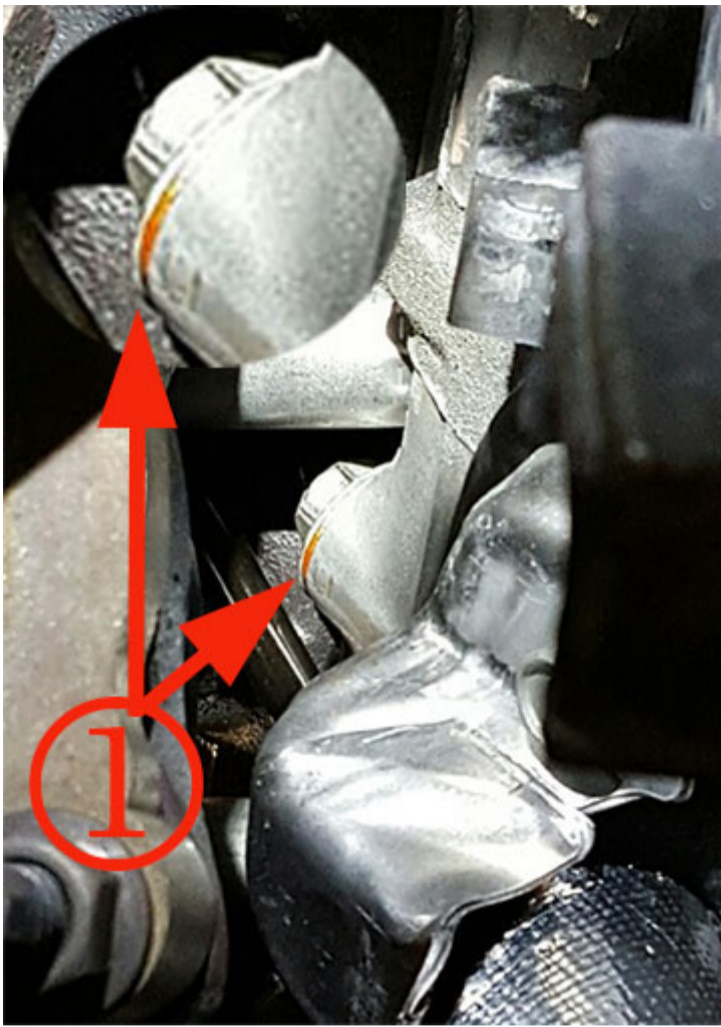

**If a leak is found the head with the concern will need to be replaced.**

Warranty Information

For vehicles repaired under the Powertrain coverage, use the following labor operation. Reference the Applicable Warranties section of Investigate Vehicle History (IVH) for coverage information.

Labor Operation	Description	Labor Time
4061770	Cylinder Head Replacement - Right Side	Use Published Labor Operation Time
4061790	Cylinder Head Replacement - Left Side	Use Published Labor Operation Time

Please follow this diagnostic or repair process thoroughly and complete each step. If the condition exhibited is resolved without completing every step, the remaining steps do not need to be performed.



GENERAL MOTORS

© 2019 General Motors. All Rights Reserved.