

Technical Service Bulletin

Topic	TPMS Warning light - DTC U012700 evident
Market area	Bentley: worldwide (2WBE),Hongkong-Macau (5HK)
Brand	Bentley
Transaction No.	2057947/2
Level	EH
Status	Released for publishing
Release date	Dec 18, 2019

Diagnostic trouble codes

Diagnostic address	Diagnostic trouble code	Fault symptom	Storage state
0019 - Gateway	U012700: Lost Communication With Tire Pressure Monitor Module		static
0019 - Gateway	U012700: Lost Communication With Tire Pressure Monitor Module		Intermittent

New customer code

Object of complaint	Complaint type	Position
chassis -> tire monitoring -> tire pressure monitoring	functionality -> no function	

Vehicle data

New Continental GT/GTC and New Flying Spur

Sales types

Type	MY	Brand	Designation	Engine code	Gearbox code	Final drive code
3S3*	2018	E		*	*	*
3S3*	2019	E		*	*	*
3S3*	2020	E		*	*	*
3S4*	2019	E		*	*	*
3S4*	2020	E		*	*	*
ZG2*	2020	E		*	*	*

Documents

Document name
master.xml

■

Condition

Customer statement

Tyre pressure monitoring system warning light on within the DIP

Technical Background

DTC U012700 evident within Address 0019 Gateway

Production Solution

Not applicable

Service

1) Replace the Tyre pressure control module and bracket (Figure 1) - Refer to Rep.Gr 44

□

The control module and bracket should be returned back to Bentley Motors Crewe as a complete assembly using the normal parts return procedure

All returned parts should reference this TPI

NOTE: For clarity Figure 1 shows the fitting location for the New Continental GT, New Continental GTC and New Flying Spur, Figure 2 shows the fitting location for Bentleyga

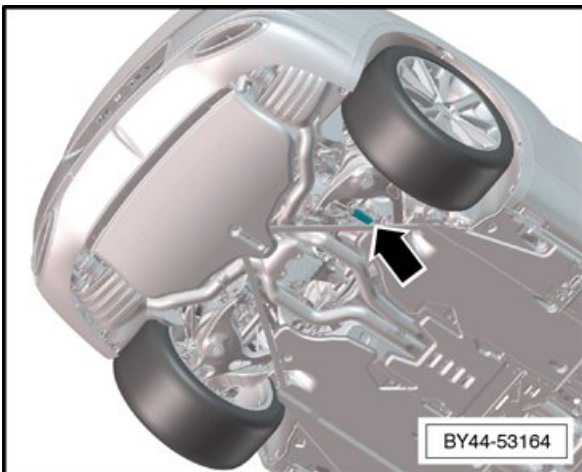


Figure 1

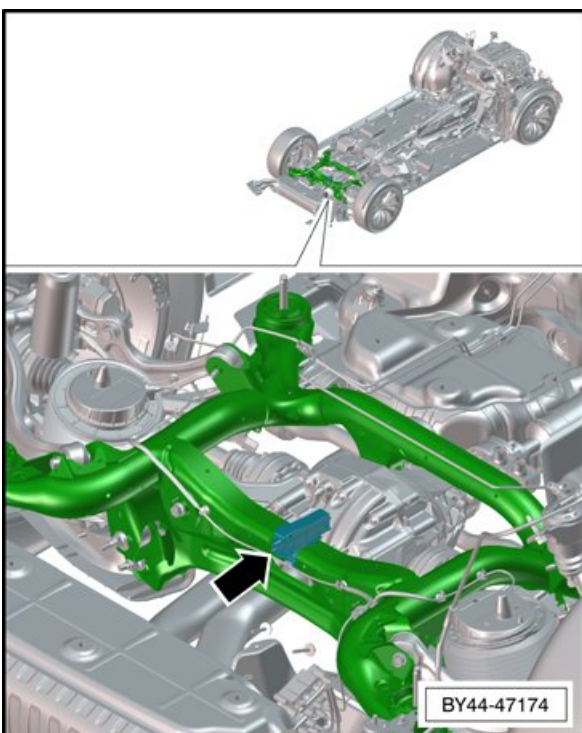


Figure 2

Warranty

Refer to Elsa pro Labour Operations

Required Parts and Tools

Refer to ETKA parts catalogue