

Classification:

Reference:

Date:

BT17-008c

ITB17-027c

January 24, 2020

2016-2020 QX80; OUTSIDE MIRROR(S) LOOSE AT BASE

This bulletin has been amended. See AMENDMENT HISTORY on the last page.
Please discard previous versions of this bulletin.

APPLIED VEHICLES: 2016-2020 QX80 (Z62)

SERVICE INFORMATION

If the power foldable outside mirrors are manually folded/unfolded or bumped, the mirror body can become loose at the pivot point.

If this occurs, the mirrors should be adjusted again electrically before driving.

To readjust the mirrors, press the "CLOSE" switch (see Figure 1) until the mirrors are fully folded in, and then press the "OPEN" switch until the mirrors are fully open.

This mirror readjustment procedure is included in section 3 - **Pre-driving checks and adjustments** of the vehicle Owner's Manual.

NOTE:

- DO NOT replace the power foldable outside mirrors for this condition, should it occur.
- This condition is not covered under the Infiniti New Vehicle Limited Warranty.

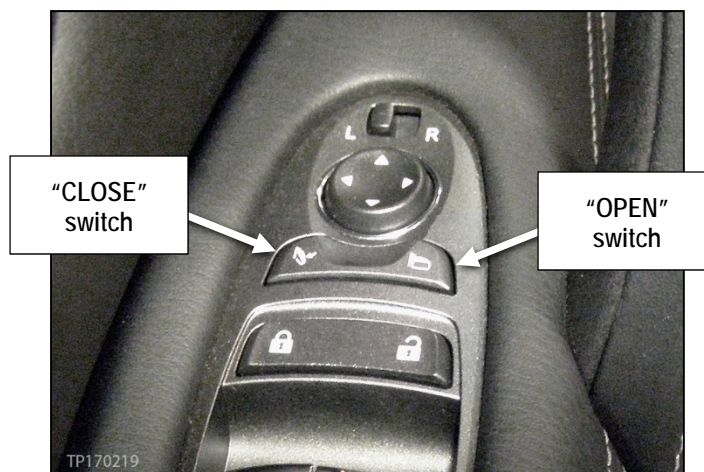


Figure 1

Infiniti Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. **NOTE:** If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Infiniti retailer to determine if this applies to your vehicle.

AMENDMENT HISTORY

Published DATE	REFERENCE	DESCRIPTION
March 21, 2017	ITB17-027	Original bulletin published
July 11, 2018	ITB17-027a	APPLIED VEHICLES revised
December 11, 2018	ITB17-027b	APPLIED VEHICLES revised
January 24, 2020	ITB17-027c	APPLIED VEHICLES revised

