

Classification:

EM20-003

Reference:

ITB20-002

COPYRIGHT© NISSAN NORTH AMERICA, INC.

Date:

January 30, 2020

2016-2019 Q50 AND 2017-2018 Q60; VR30DDTT ENGINE SERVICE INFORMATION

APPLIED VEHICLES:	2016-2019 Q50 (V37) 2017-2018 Q60 (CV37)
APPLIED DATE:	2016-2019 Q50 vehicles built before August 9, 2018 2016-2018 Q60 vehicles built before July 5, 2018
APPLIED ENGINE:	VR30DDTT (V6)

SERVICE INFORMATION

The oil fill volume for the VR30DDTT engine has increased by 0.5 quarts (0.5 liters).

When replacing a VR30DDTT short block or long block in an applied vehicle for any reason, replace the dipstick with the part listed in **PARTS INFORMATION** on the next page. The length of the new dipstick is shorter so that it can accurately measure the new oil fill volume.

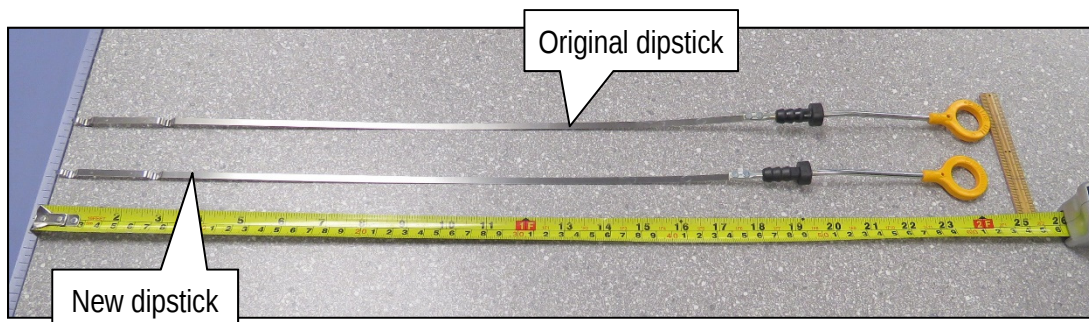


Figure 1

- If the overall length of the dipstick is approximately 25 inches (63.5 cm), replace the dipstick with the one listed in **PARTS INFORMATION** on the next page.
- The overall length of the new dipstick is approximately 24 ¼ inches (62 cm).
- The new dipstick reflects an increase in oil fill volume by 0.5 quarts (0.5 liters).

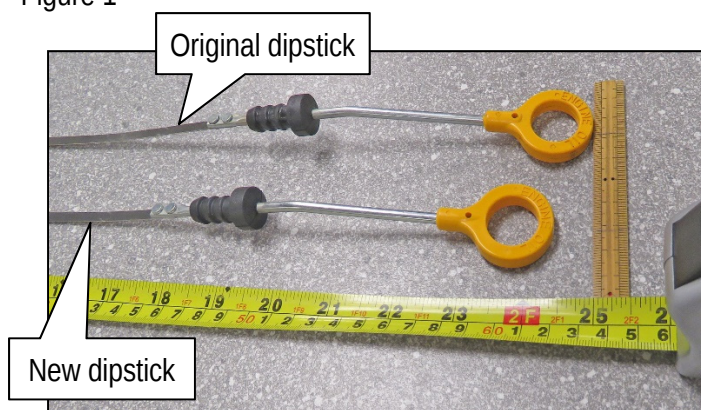


Figure 2

Infiniti Bulletins are intended for use by qualified technicians, not 'do-it-yourselfers'. Qualified technicians are properly trained individuals who have the equipment, tools, safety instruction, and know-how to do a job properly and safely. **NOTE:** If you believe that a described condition may apply to a particular vehicle, DO NOT assume that it does. See your Infiniti retailer to determine if this applies to your vehicle.

PARTS INFORMATION

DESCRIPTION	PART NUMBER	QUANTITY
Gauge – Oil Level (dipstick)	11140-5CA0B	1

AMENDMENT HISTORY

PUBLISHED DATE	REFERENCE	DESCRIPTION
January 30, 2020	ITB20-002	Original bulletin published

