



ABS Module PAR file

Description:

Trucks left factory with incorrect PAR file loaded to the ABS module.

Corrective Action:

Reprogram of ABS ECU

UCHP SCC CODE: S7447

EXPIRATION DATE: 7/15/2020

CAUSAL PART NUMBER: 23103632

UCHP Labor Code: 1720-16-09-01 - Qty = 3

FOR MORE INFORMATION CONTACT:


Kevin Sigafoos 336-393-2172 kevin.sigafoos@volvo.com

Decommissioning the Truck for Repair

You must read and understand the precautions and guidelines in Service Information, group 30, "General Safety Practices, Electrical" before performing this procedure. If you are not properly trained and certified in this procedure, ask your supervisor for training before you perform it.

NOTE: Information is subject to change without notice. Illustrations are used for reference only and can differ slightly from the actual vehicle being serviced. However, key components addressed in this information are represented as accurately as possible.

1. Park the vehicle on a flat and level surface.
2. Apply the parking brake.
3. Place the transmission in neutral or park.
4. Install the wheel chocks.

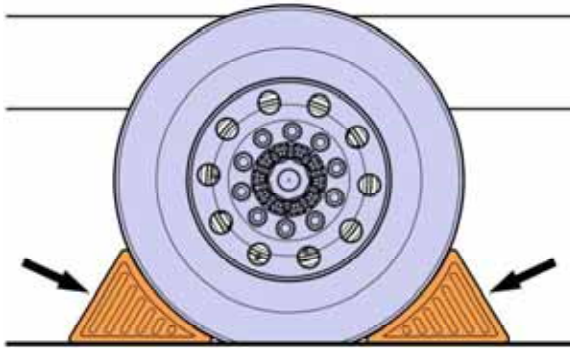

Repair Procedure:

1. Perform 5931-07-03-20 ESP Control Unit Configuration operation in Tech Tool.
2. Verify fault free with ACOM and Tech Tool.
3. Check functionality of HSA, traction control, and trailer modulator.

Commissioning the Truck for Operation

1. Remove the wheel chocks.

