

INFORMATION REDACTED PURSUANT TO THE FREEDOM
OF INFORMATION ACT (FOIA), 5 U.S.C. 552(B)(6)





















OMRON
G833804A

20

E

62°F

Radio Off

Fuel Economy ▶

Vehicle Speed

Trip Info

38547 mi RUN



P

R

N

D












8
TIRES
OLD
TIRES
COLD

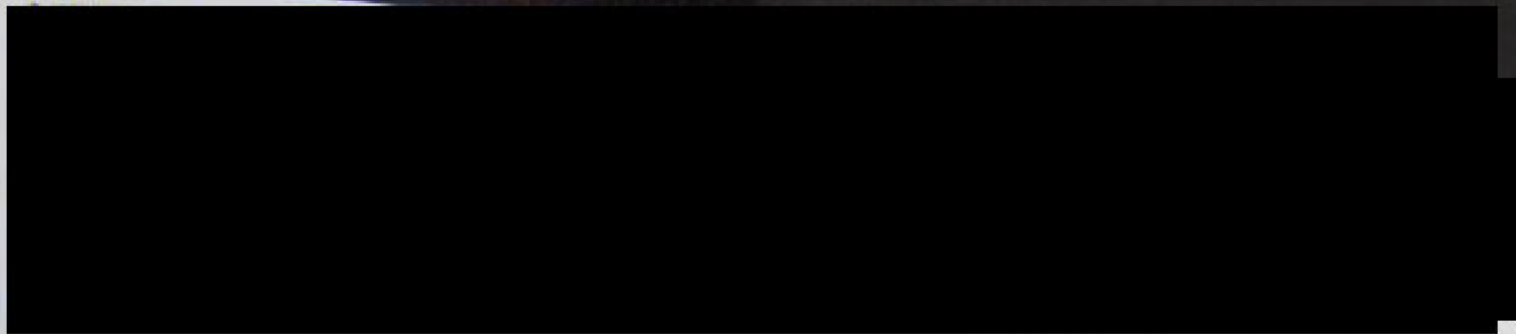

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S.A. FEDERAL MOTOR VEHICLE SAFETY
STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

VIN: 2C4RDGB	[REDACTED]	TYPE: MPV	NDH: 012407 058AA
VEHICLE MADE IN CANADA	PRINT: PAR	TRIM: N7X9	

MFD BY **CHRYSLER GROUP LLC**

DATE OF MFR(BUILT): 1-14

GVWR: 2745 KG 6050 LB

GAWR FRONT: 1339 KG 2950 LB WITH 225/65R17 TIRES
17X6.5 RIMS AT 250 KPA (36 PSI) COLD

GAWR REAR: 1407 KG 3100 LB WITH 225/65R17 TIRES
17X6.5 RIMS AT 250 KPA (36 PSI) COLD

THIS VEHICLE C



TIRE AND LOADING INFORMATION

SEATING CAPACITY – TOTAL 7 FRONT 2 REAR 5

THE COMBINED WEIGHT OF OCCUPANTS AND CARGO SHOULD NEVER EXCEED
521 KG OR 1150 LB

TIRE	FRONT	REAR	SPARE
ORIGINAL TIRE SIZE	225/65R17	225/65R17	NONE
COLD TIRE INFLATION PRESSURE	250 kPa / 36 PSI	250 kPa / 36 PSI	NONE

SEE OWNERS MANUAL FOR ADDITIONAL INFORMATION



ER2





























WARNING: CLEAN FILLER CAP BEFORE
REMOVING. USE ONLY DOT 3 FLUID
FROM A SEALED CONTAINER.

59A4



















MENU

AUDIO

MY FILES

99.1

95.1

98.7

102.7

4

PRESETS

HARD DISC DRIVE

AUX





door

 P R N D 





⚠ P R N D ⚡ ⚠
🔋 BRAKE ●





 **P** **R** **N** **D** 



RADIO
MEDIA
VOLUME

PUSH ON

AMFM

Adlt Hit

102.7ST

DIRECT TUNE
SCAN
1:17


1
2
3
4

99.1

95.1

98.7

102.5

PRESETS



HARD DISC DRIVE

ANTITHEFT

ALR









48293 miles



































USB



USB











8950











1

/ 1



2014 RT 3.6L | VIN: 2C4RDGB

Device Serial Number: 15

Device Software Version: 2.4.1



ECU	Code	Status	Description
DMFL	B21A1	Stored	ECU Reset/Recovery Occurred
DMFR	B21A1	Stored	ECU Reset/Recovery Occurred

2014 RT 3.6L | VIN: 2C

Device Serial Number:


Device Software Version: 2.4.1

ECU	Code	Status	Description
DMFL	B21A1	Stored	ECU Res
DMFR	B21A1	Stored	ECU Res

WITECH

Description
ECU Reset/Recovery Occurred
ECU Reset/Recovery Occurred



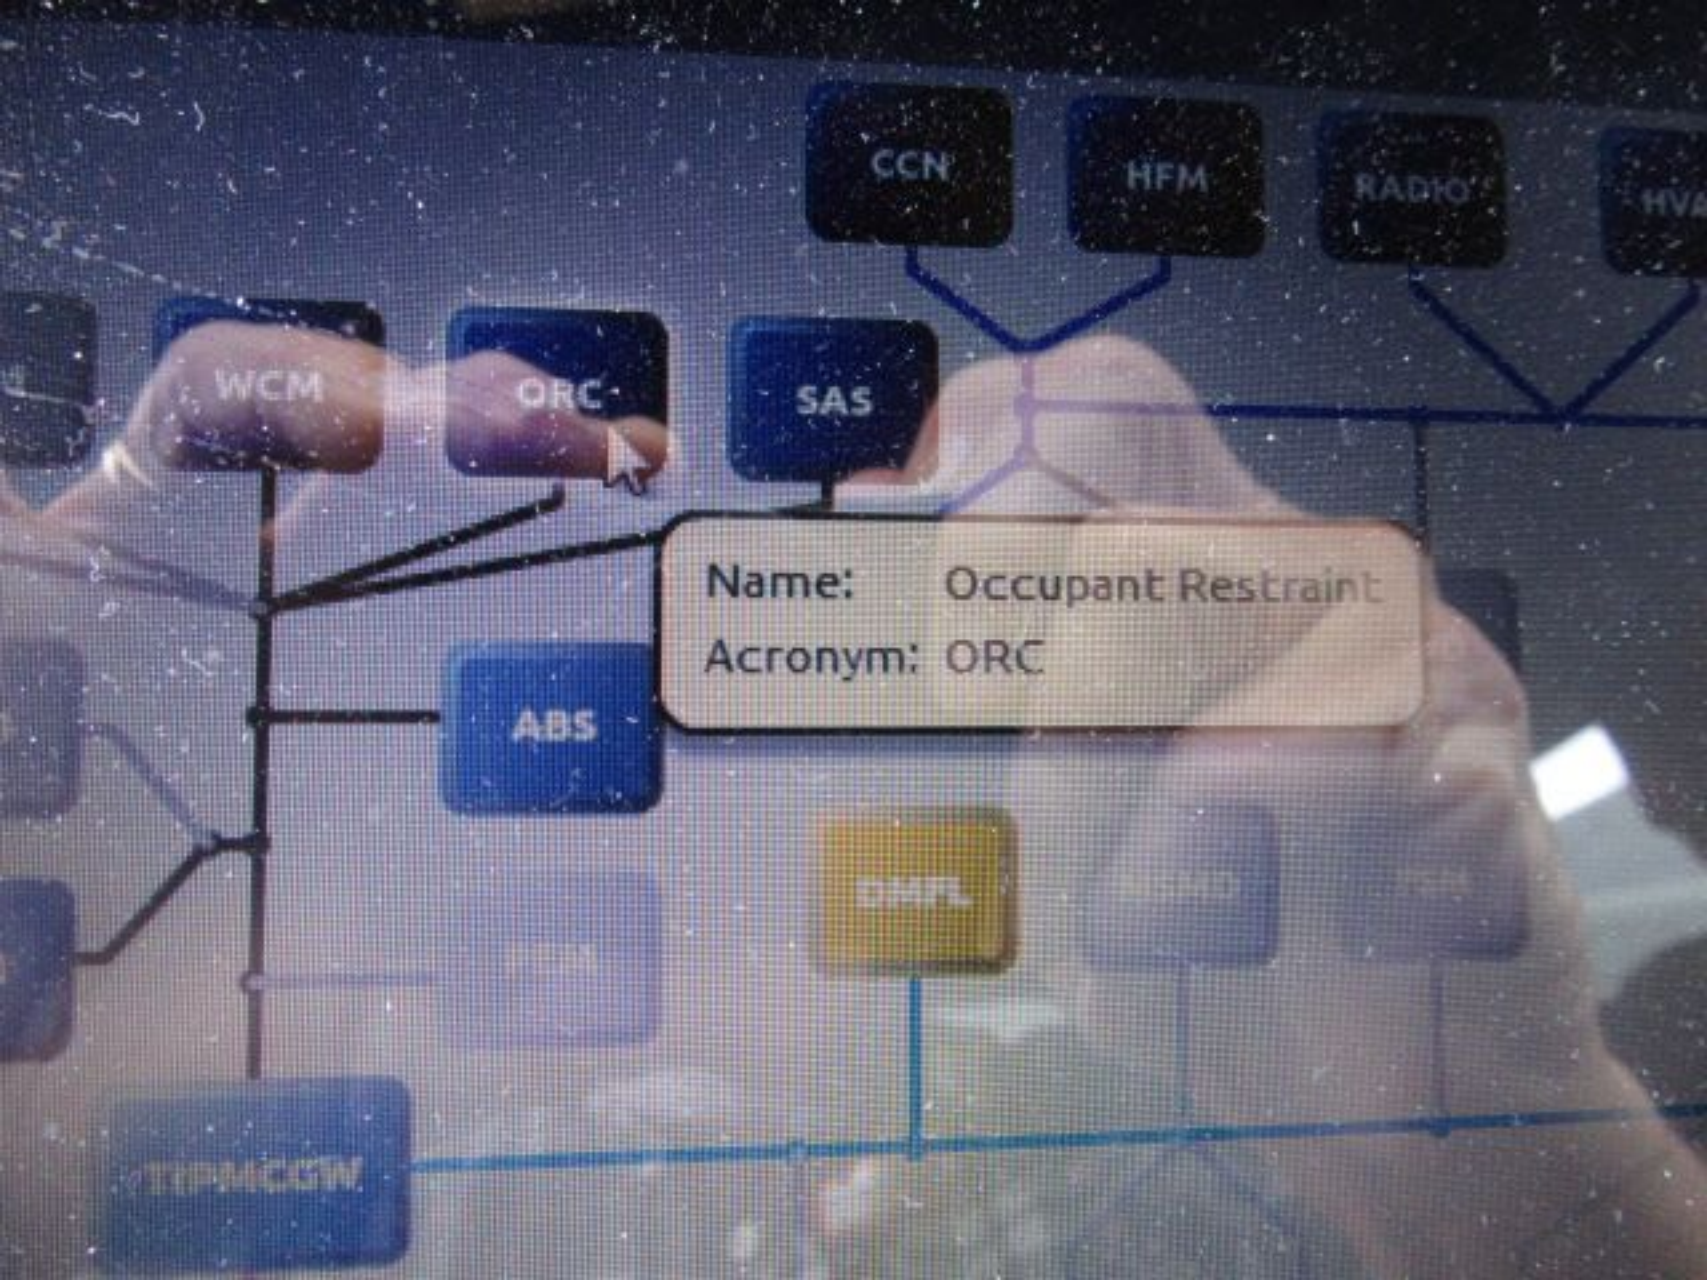

Overview

Name:

Occupant Restraint

Flash Part Number:

[REDACTED]

Bus Type:

CAN C

Hardware Version:

13.08.00

Software Version:

#0: 18.49.00, #1: 19.36.00, #2: 19.36.00

Spare Part Number:

Not Available

ISO Code:

Software Number:

Not Available



ORC View


Click on tabs to access various ECU ope

Flash

Data

D

Double-click row se

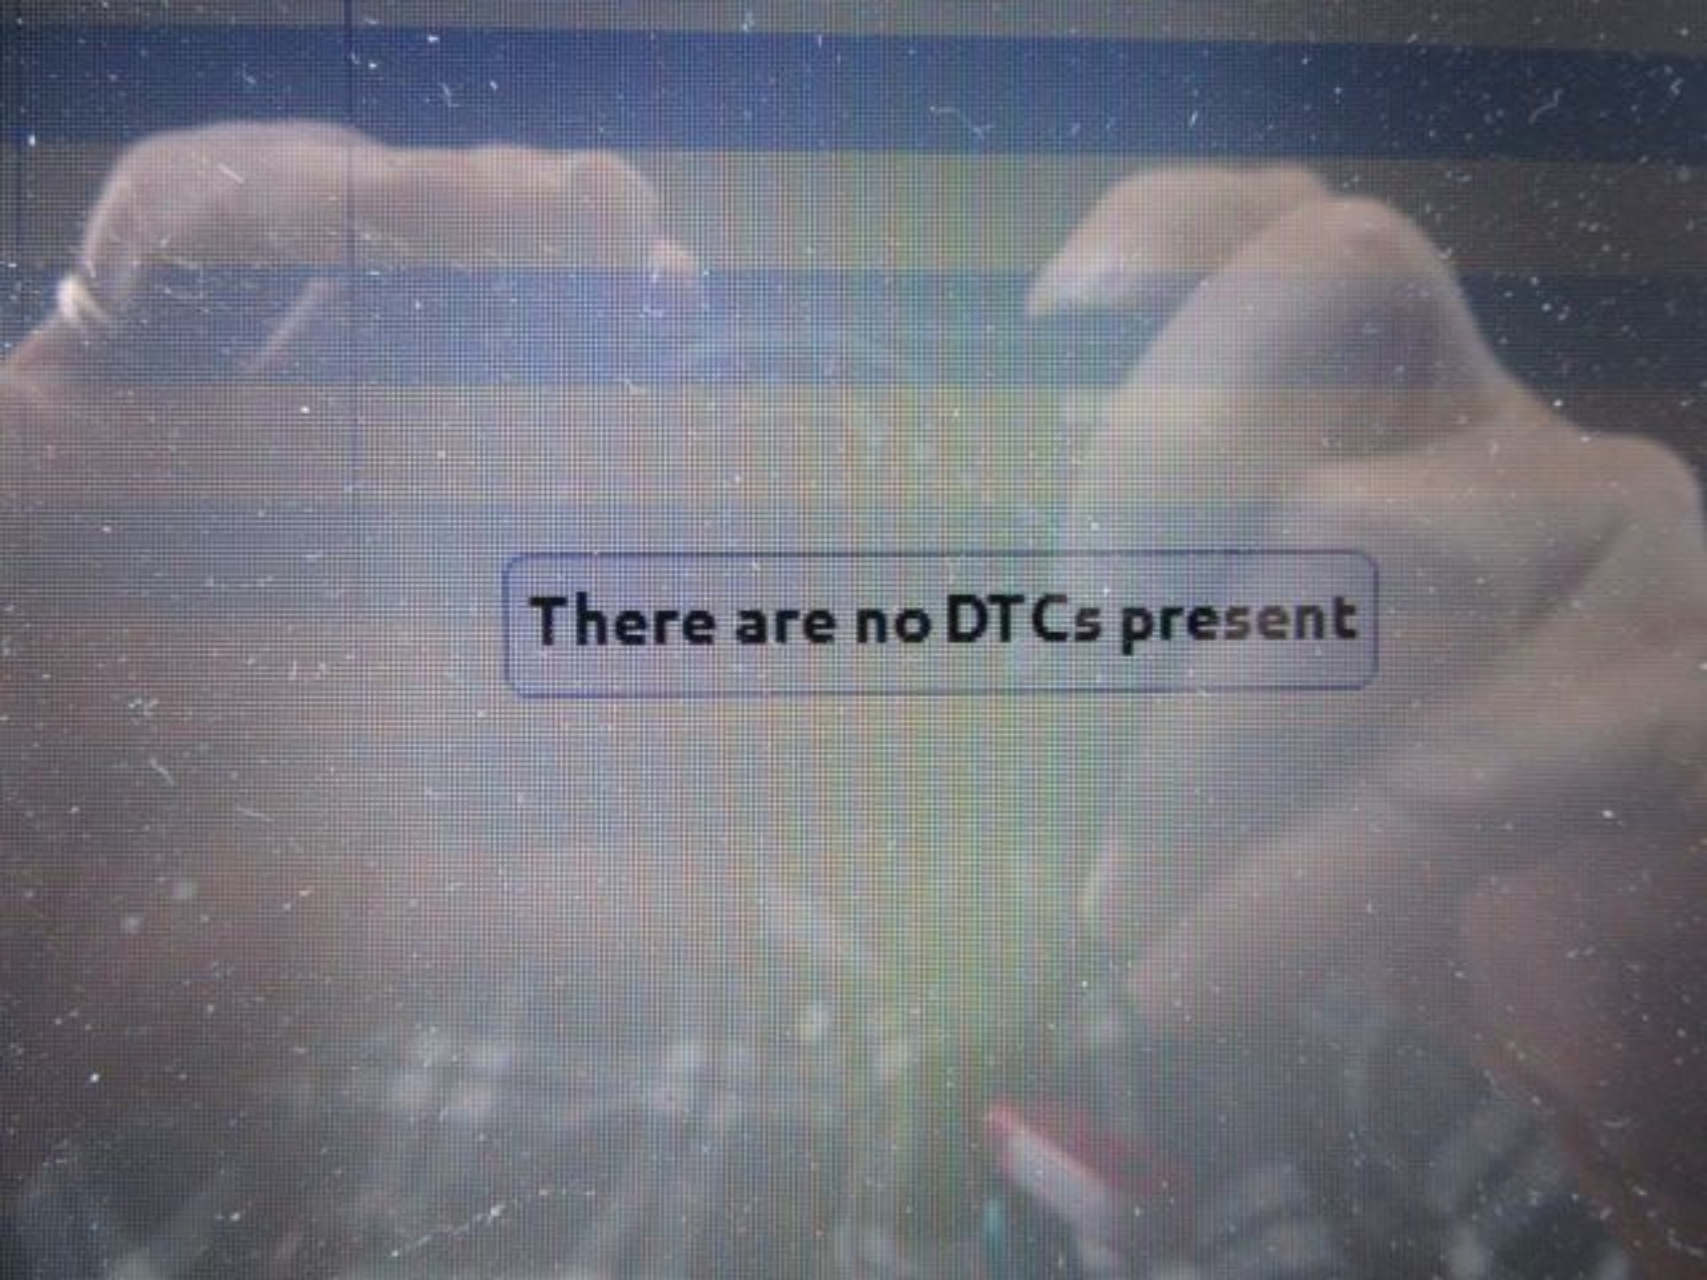

There are no DTCs present

Overview

Name:

Occupant Restraint

Flash Part Number:

[REDACTED]

Bus Type:

CAN C

Hardware Version:

13.08.00

Software Version:

#0: 18.49.00, #1: 19.36.00, #2: 19.36.00

Spare Part Number:

Not Available

ISO Code:

Software Number:

Not Available












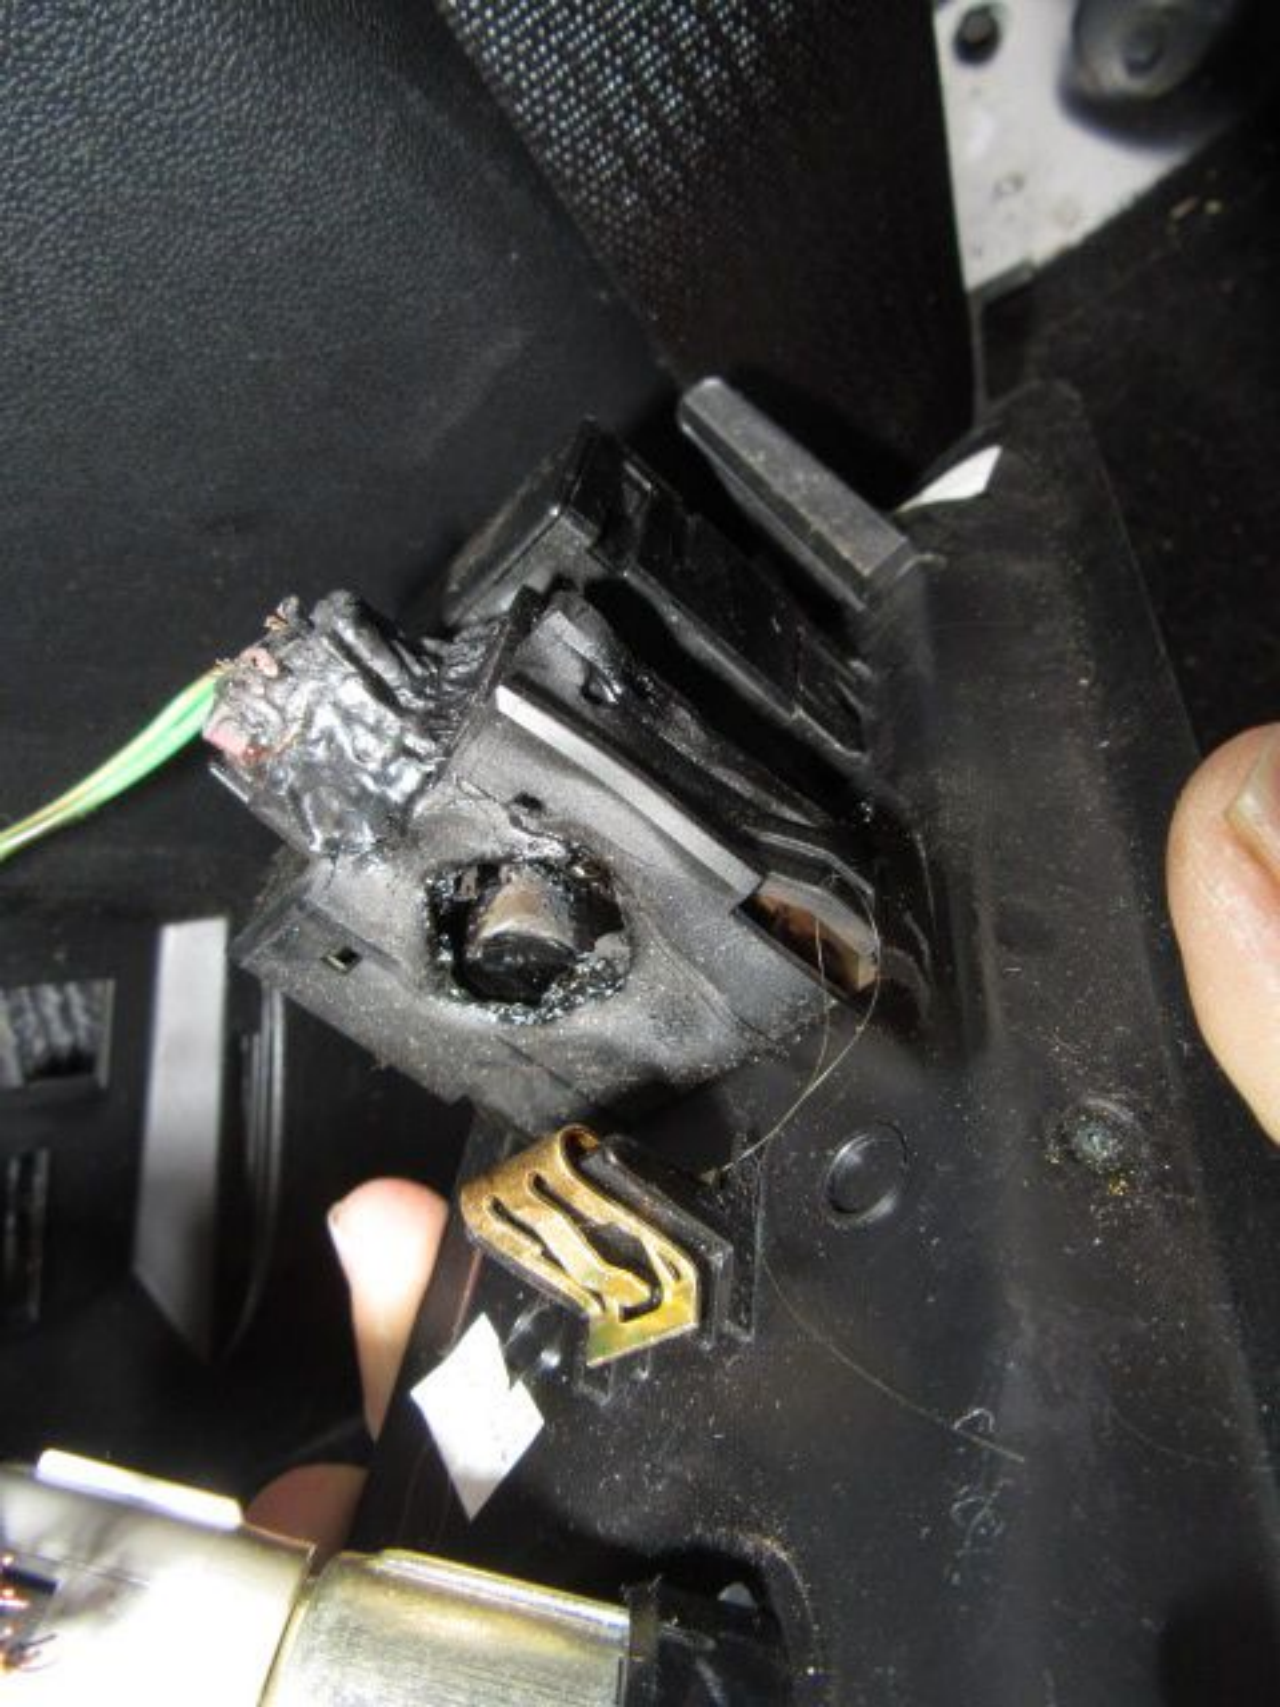









34017041









8
TIRES
OLD
TIRES
COLD



THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S.A. FEDERAL MOTOR VEHICLE SAFETY
STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

VIN: 2C4RDGB [REDACTED] TYPE: MPV NDH: 012407 058AA
VEHICLE MADE IN CANADA PAINT: PAR TRIM: N7X9

MFD BY **CHRYSLER GROUP LLC**

DATE OF MFR(BUILT): 1-14

GVWR: 2745 KG 6050 LB

GAWR FRONT: 1339 KG 2950 LB WITH 225/65R17 TIRES
17X6.5 RIMS AT 250 KPA (36 PSI) COLD

GAWR REAR: 1407 KG 3100 LB WITH 225/65R17 TIRES
17X6.5 RIMS AT 250 KPA (36 PSI) COLD

THIS VEHICLE C



TIRE AND LOADING INFORMATION

SEATING CAPACITY – TOTAL 7 FRONT 2 REAR 5

THE COMBINED WEIGHT OF OCCUPANTS AND CARGO SHOULD NEVER EXCEED
521 KG OR 1150 LB

TIRE	FRONT	REAR	SPARE
ORIGINAL TIRE SIZE	225/65R17	225/65R17	NONE
COLD TIRE INFLATION PRESSURE	250 kPa / 36 PSI	250 kPa / 36 PSI	NONE

SEE OWNERS MANUAL FOR ADDITIONAL INFORMATION



ER2



