



17-20-01TT - Engine Oil Leak from Oil Pan or Transmission (Bellhousing) Area

Release date: 04/17/2020

Condition

ATTENTION: THIS IS A TECH TIP, NOT A TECHNICAL BULLETIN. TECH TIPS ARE NOT ASSOCIATED WITH WARRANTY CLAIMING.

Table with 6 columns: Model(s), Year, Eng. Code, Trans. Code, VIN Range From, VIN Range To. Row 1: Touareg, 2013-2015, 3.0L TDI (CNRB), All, All, All.


Revision Table with 4 columns: Instance Number, Published Date, Version Number, Reason For Update. Row 1: 2059301/1, 4/17/20, 17-20-01TT, Original publication.

Technical Background

Oil leaking.

Service

Check torque on the upper oil pan (sump) bolts. Specifically, the 3 long bolts near the starter that go through the oil pump. A T45 fastener is used. Check for oil on the 3 long bolt heads to further indicate the source of the leak. Verify that oil pan sealant was routed correctly on the oil pan.

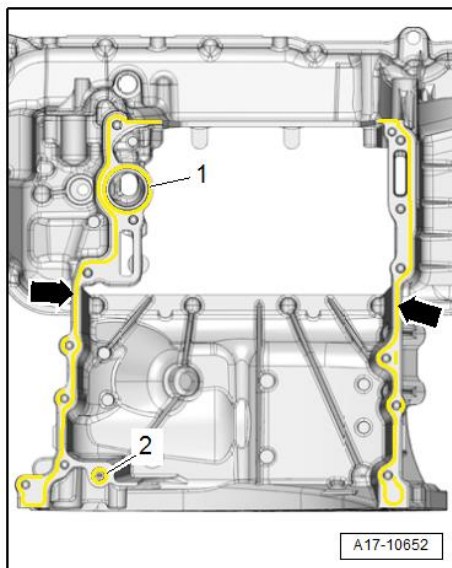



17-20-01TT - Engine Oil Leak from Oil Pan or Transmission (Bellhousing)
Area

Release date: 04/17/2020

Additional Information

© 2020 Volkswagen Group of America, Inc. All rights reserved. Information contained in this document is based on the latest information available at the time of printing and is subject to the copyright and other intellectual property rights of Volkswagen Group of America, Inc., its affiliated companies and its licensors. All rights are reserved to make changes at any time without notice. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, nor may these materials be modified or reposted to other sites, without the prior expressed written permission of the publisher.