


STAR ONLINE PUBLICATION

Case Number: S2023000015

Release Date: 03/05/2020

Symptom/Vehicle Issue: Power Sliding Door Window Will Not Power Closed

Discussion: Verify the window will not power up from full open position. Inspect connectors at power window motor. Test for power and ground with a test light. If ok, and the issue appears to be related to excessive resistance on the window- replace the Sliding Door Glass Channel. Use the most up to date part shown in Star Parts catalog.

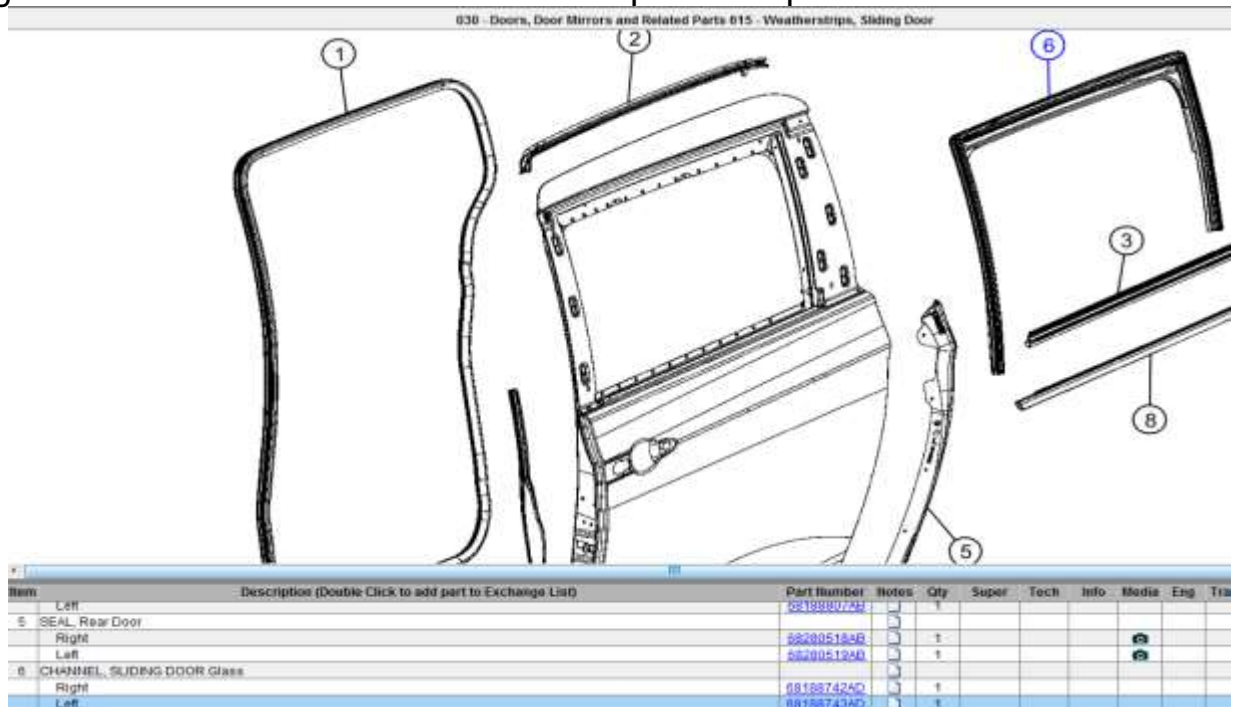

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

Contact STAR Center, or your Technical Assistance Center Via TechCONNECT or eCONTACT ticket if no solution is found