	<b>GROUP</b> <b>Electrical</b>	<b>MODEL</b> <b>2020-2021MY</b> <b>Soul (SK3)</b>
	<b>NUMBER</b> <b>PS661</b>	<b>DATE</b> <b>May 2020</b>




## TECHNICAL OPERATIONS

**SUBJECT: BLIND-SPOT COLLISION WARNING (BCW)  
VARIANT CODING – POSSIBLE C166A87**

This Pitstop provides information regarding the Blind-Spot Collision Warning (BCW) system setting a DTC C166A87 after replacing a BCW module on 2020-2021 Soul (SK3) vehicles. After replacement, the BCW (BSD) variant coding needs to be performed using the KDS under S/W Management for the options equipped for that vehicle.

**Note:** BCW and Rear Cross-Traffic Collision Warning (RCCW) are linked, so one cannot be disabled without the other.

### DTC C166A87: CAN Time-Out LDWS/LKAS/MFC/LDW/LKA

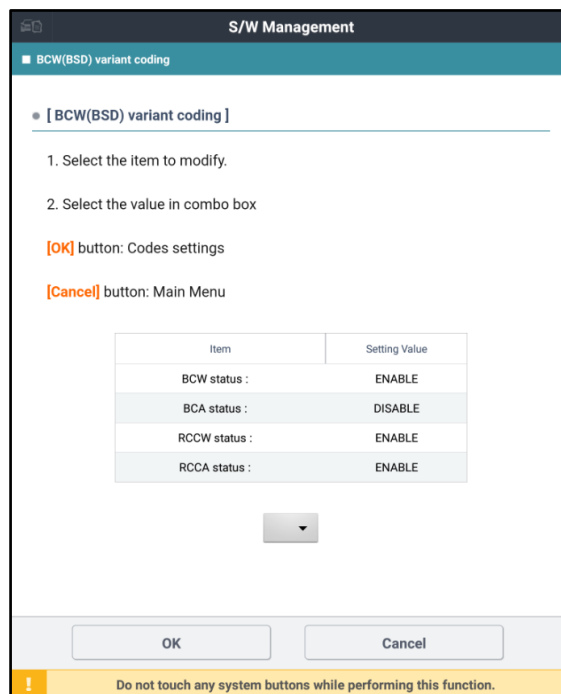

(20MY GT-Line 1.6L-T settings shown above)

System	DTC	Description	State
BCW	C166A87	CAN Time-Out LDWS/LKAS/MFC/LDW/LKA	Active